



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **2.1 – 3.31 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Low
-----------------	-----

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Flag
Contact Base Material	Brass
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Extraction Force	7 – 100 Newton
Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Terminal Material Thickness	.41 mm[.016 in]
Product Length	21.6 mm[.85 in]
Compatible Insulation Diameter Range	2.8 – 5.2 mm[.11 – .204 in]
Wire Size	2.1 – 3.31 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Agency/Standard	UL
-----------------	----

Packaging Features

Packaging Quantity	2000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

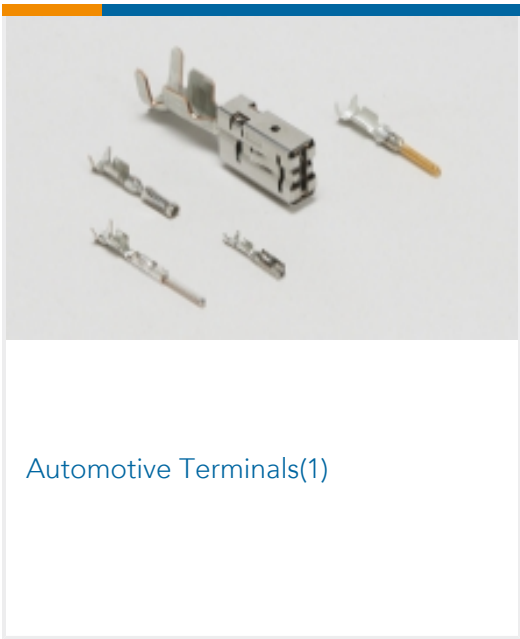
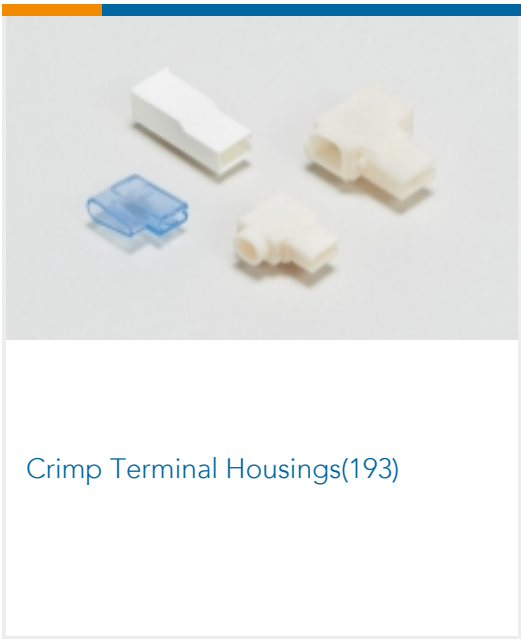
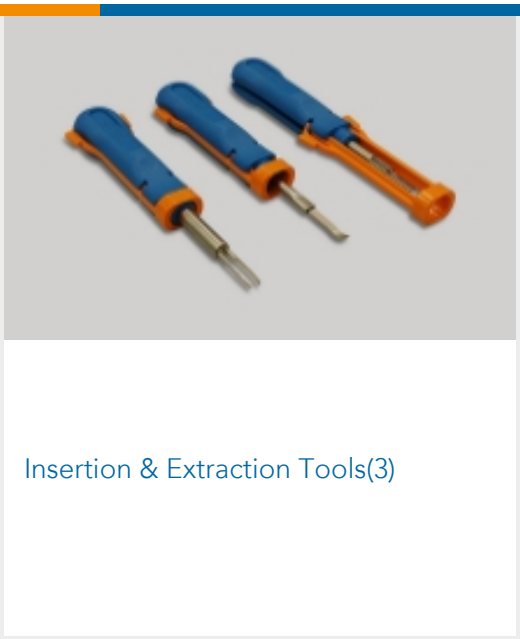


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 1-172469-2 PL 250 (6.3 MM) HOUSING BLUE 6/6 NYLON	 TE Part # 341299-2 PL 250 REC TERMINAL 20-15 AWG PTPB	 TE Part # 1-172469-1 PL 250 HOUSING NATURAL 6/6 NYLON	 TE Part # 2-2150940-2 OCEAN_2.0_Applicator-E-130F219OA
 TE Part # 2150940-2 OCEAN_2.0_Applicator-E-130F219OA	 TE Part # 7-2150940-2 OCEAN_2.0_Applicator-E-130F219OA	 TE Part # 7-2150940-7 OCEAN_2.0_SPARE_PART_KIT- 130F219O	

Also in the Series | Positive Lock 250

 Automotive Terminals(1)	 Crimp Terminal Housings(193)	 Insertion & Extraction Tools(3)	 Insulation Boots & Sleeves(4)
--	--	--	--



Quick Disconnects(186)

Customers Also Bought



TE Part #3-641238-2
02P MTA100 CONN ASSY NATL 30AU



TE Part #770006-3
UMNL II SOK PTPPHBZ



TE Part #61177-2
250 FASTON FLAG REC 18-12 AWG TPBR



TE Part #3-1355397-3
4POS MQS REC COD C



TE Part #1355717-1
MQS0,63 Sn rec LL unseal. 0,08-0,22



TE Part #329633
GASKET



TE Part #224151-E
M08 F 4 A H S * 207 16,3 094 * * * * 000



TE Part #224152-E
M08 M 4 A H S * 201 16,3 094 * * * * H00

TE Part #134521-E
ERBIC BUS * BUS-SYSTEM SYS DEVN
HO SC CU

TE Part #144744-E
ERBIC BUS B BUS-SYSTEM SYS CAN
HO SC CU

Documents

Product Drawings

PL 250 FLAG REC 14-12 0.40 X 49.2 PTBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_172765-1_E.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_172765-1_E.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_172765-1_E.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[1654742_HOUSEHOLD_APPLIANCES_RAST5](#)

English

Positive Lock Receptacles

English

Product Specifications

[1-Pos.'250' Flag, Positive Lock Connector](#)

Japanese

Application Specification

Japanese

Product Environmental Compliance

[Product Compliance](#)

English

Product Compliance

English