THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION – ,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
AF	50

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	S	REVISED PER ECR–13–004343	30JUL13	KH	KR

1 MATES WITH .032±.001x.250 TAB

2 WIRE STRIP LENGTH .281

3 INSULATION SIZE .160 MAX DIA

△5 DIMENSION DOES NOT INCLUDE TRIM BURR

△6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

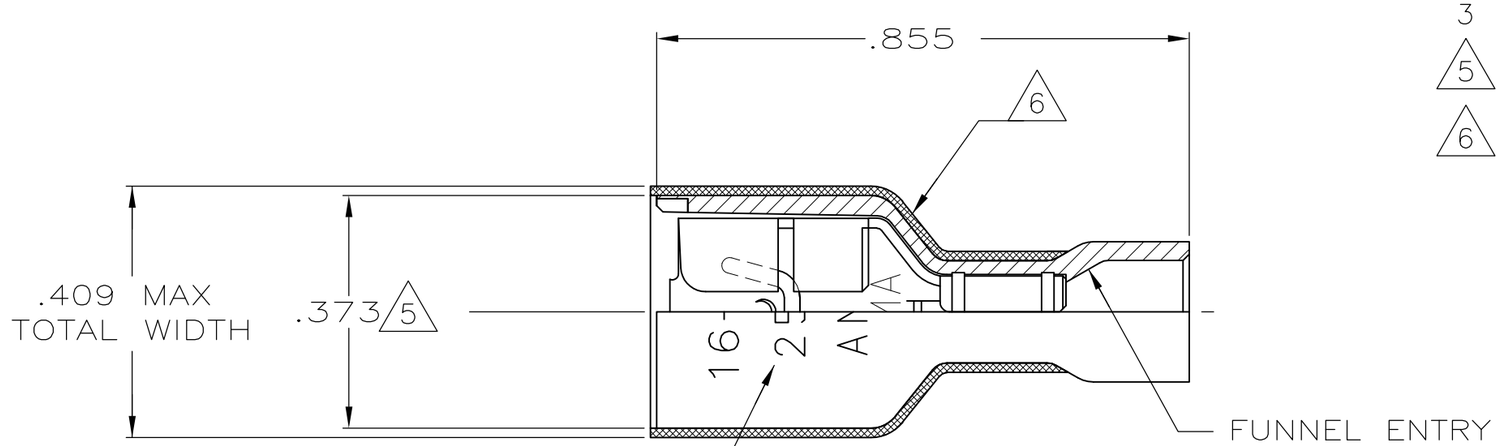

HOUSING:NYLON,COLOR–BLUE TRANSLUCENT
RECEPTACLE: BRASS
TIN

MATERIAL & FINISH

3–350820–2

PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± –
3 PLC	± .015
4 PLC	± –
ANGLES	± –

MATERIAL: SEE TABLE

FINISH: SEE TABLE

DWN	P FORTNEY 10/5/88
CHK	JR RUTH 10/6/88
APVD	KA RANDOLPH 10/6/88
PRODUCT SPEC	108–2043
APPLICATION SPEC	114–2123
WEIGHT	–

TE Connectivity

NAME: RECEPTACLE ASSY,ULTRA–FAST, LOOSE PIECE,.250 SERIES,16–14 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–350820	–

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV S