
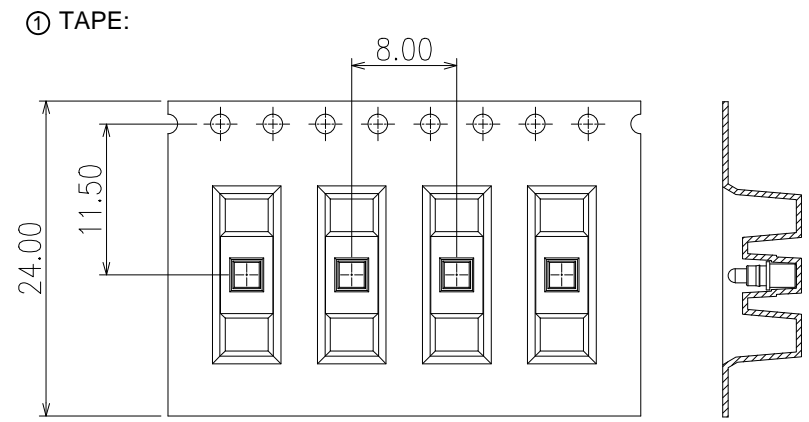


**NOTES:**  
 Plunger: Brass, 20μ" MIN Au over, 50μ" MIN Ni over  
 Barrel : Brass, 3μ" ,MIN Au over, 50μ" MIN Ni over  
 Spring : Stainless Steel  
**Mechanical Characteristics:**  
 Spring Force : 60g ± 20% at Working Length  
 Mechanical Life : 1,000,000 cycle  
**Electrical Characteristics:**  
 Current Rating : 2A  
 Contact Resistance : 20 mΩ Max  
 Operating Temperature range : -55~125° C  
**Packing:**  
 A-CSL-S-020-B4 : PE Bag  
 ① A-CSL-S-020-BR4 :Tape&Reel

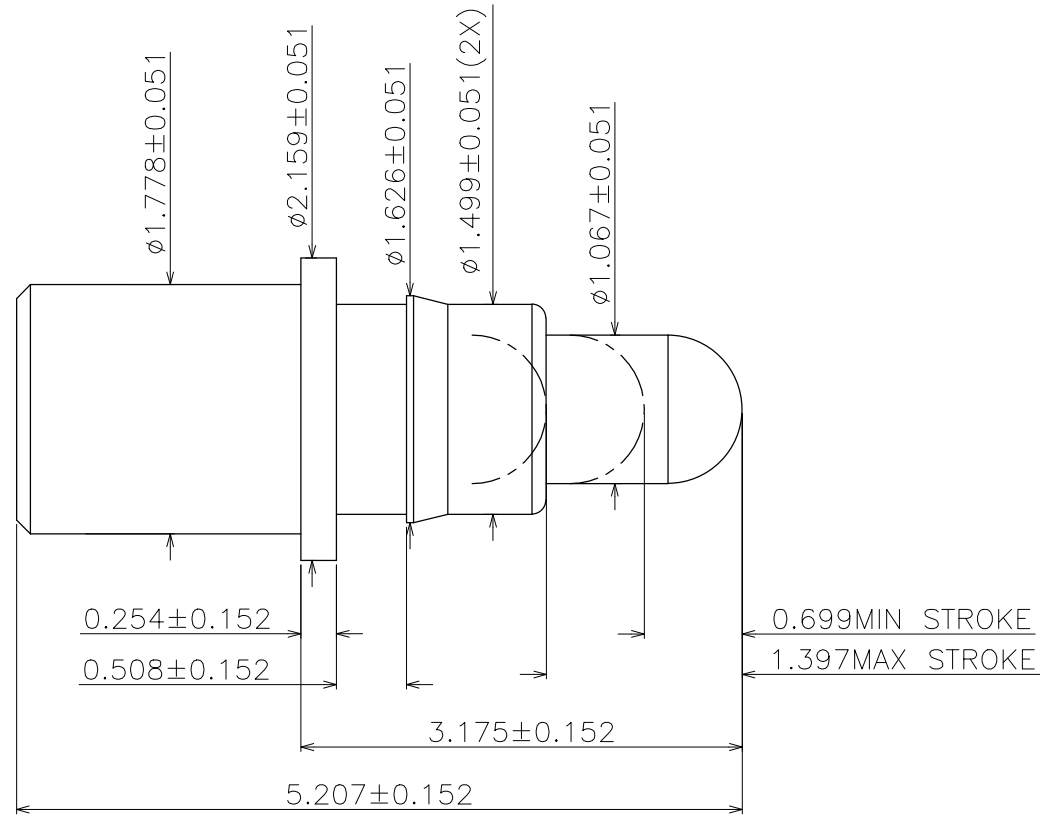

Component Load Per 13" Reel :1450 Pcs

**RoHS compliant**  
Unit: mm

Scale	Free						Date	Name	Customer-No.	
TOLERANCE						Drawn	28.03.2018	Tom	ASSMANN WSW-No. <b>A-CSL-S-020-Bx4</b>	
X.X	±0.20					Approved	09.12.2018	Luca		
X.XX	±0.10									
X.XXX	±0.08									
DIM	TOL	①	Add the tape & reel packing	09.12.2018	Luca				Drawing-No.	
Angle	±3°	②	Drawn	28.03.2018	Tom				<b>ASS 7897 CO</b>	rev01
Angle	TOL	Id.	Modification	Date	Name				Replace	Sheet