

# MC14018B

## Presettable Divide-By-N Counter

The MC14018B contains five Johnson counter stages which are asynchronously presettable and resettable. The counters are synchronous, and increment on the positive going edge of the clock.

Presetting is accomplished by a logic 1 on the preset enable input. Data on the Jam inputs will then be transferred to their respective  $\bar{Q}$  outputs (inverted). A logic 1 on the reset input will cause all  $\bar{Q}$  outputs to go to a logic 1 state.

Division by any number from 2 to 10 can be accomplished by connecting appropriate  $\bar{Q}$  outputs to the data input, as shown in the Function Selection table. Anti-lock gating is included in the MC14018B to assure proper counting sequence.

### Features

- Fully Static Operation
- Schmitt Trigger on Clock Input
- Capable of Driving Two Low-Power TTL Loads or One Low-Power Schottky TTL Load Over the Rated Temperature Range
- Pin-for-Pin Replacement for CD4018B
- Pb-Free Packages are Available\*

### MAXIMUM RATINGS (Voltages Referenced to $V_{SS}$ )

| Symbol            | Parameter   | Value                  | Unit               |
|-------------------|---|------------------------|--------------------|
| $V_{DD}$          | DC Supply Voltage Range                           | -0.5 to +18.0          | V                  |
| $V_{in}, V_{out}$ | Input or Output Voltage Range (DC or Transient)   | -0.5 to $V_{DD} + 0.5$ | V                  |
| $I_{in}, I_{out}$ | Input or Output Current (DC or Transient) per Pin | $\pm 10$               | mA                 |
| $P_D$             | Power Dissipation, per Package (Note 1)           | 500                    | mW                 |
| $T_A$             | Ambient Temperature Range                         | -55 to +125            | $^{\circ}\text{C}$ |
| $T_{stg}$         | Storage Temperature Range                         | -65 to +150            | $^{\circ}\text{C}$ |
| $T_L$             | Lead Temperature (8-Second Soldering)             | 260                    | $^{\circ}\text{C}$ |

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

#### 1. Temperature Derating:

Plastic "P and D/DW" Packages: - 7.0 mW/ $^{\circ}\text{C}$  From 65 $^{\circ}\text{C}$  To 125 $^{\circ}\text{C}$

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation,  $V_{in}$  and  $V_{out}$  should be constrained to the range  $V_{SS} \leq (V_{in} \text{ or } V_{out}) \leq V_{DD}$ .

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either  $V_{SS}$  or  $V_{DD}$ ). Unused outputs must be left open.


\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.





ON Semiconductor®

<http://onsemi.com>


### MARKING DIAGRAMS



PDIP-16  
P SUFFIX  
CASE 648



SOIC-16  
D SUFFIX  
CASE 751B




A = Assembly Location  
WL, L = Wafer Lot  
YY, Y = Year  
WW, W = Work Week  
G = Pb-Free Indicator

### ORDERING INFORMATION



See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

# MC14018B

## PIN ASSIGNMENT

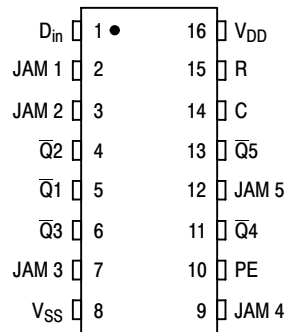

## FUNCTIONAL TRUTH TABLE

| Clock   | Reset | Preset Enable | Jam Input | $\bar{Q}_n$   |
|---|-------|---------------|-----------|---------------|
|  | 0     | 0             | X         | $\bar{Q}_n$   |
|  | 0     | 0             | X         | $\bar{D}_n^*$ |
| X   | 0     | 1             | 0         | 1             |
| X   | 0     | 1             | 1         | 0             |
| X   | 1     | X             | X         | 1             |

\* $\bar{D}_n$  is the Data input for that stage. Stage 1 has Data brought out to Pin 1.

## ORDERING INFORMATION

| Device       | Package              | Shipping <sup>†</sup>    |
|--------------|----------------------|--------------------------|
| MC14018BCP   | PDIP-16              | 500 Units / Rail         |
| MC14018BCPG  | PDIP-16<br>(Pb-Free) | 500 Units / Rail         |
| MC14018BD    | SOIC-16              | 48 Units / Rail          |
| MC14018BDG   | SOIC-16<br>(Pb-Free) | 48 Units / Rail          |
| MC14018BDR2  | SOIC-16              | 2500 Units / Tape & Reel |
| MC14018BDR2G | SOIC-16<br>(Pb-Free) | 2500 Units / Tape & Reel |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# MC14018B

## ELECTRICAL CHARACTERISTICS (Voltages Referenced to V<sub>SS</sub>)

| Characteristic   | Symbol                     | V <sub>DD</sub><br>Vdc | - 55° C   |        | 25° C |                 |        | 125° C |        | Unit |      |   |
|--|----------------------------|------------------------|---|--------|-------|-----------------|--------|--------|--------|------|------|---|
|  |                            |                        | Min   | Max    | Min   | Typ<br>(Note 2) | Max    | Min    | Max    |      |      |   |
| Output Voltage<br>V <sub>in</sub> = V <sub>DD</sub> or 0<br><br>V <sub>in</sub> = 0 or V <sub>DD</sub>   | "0" Level<br><br>"1" Level | V <sub>OL</sub>        | 5.0   | —      | 0.05  | —               | 0      | 0.05   | —      | 0.05 | Vdc  |   |
|  |                            |                        | 10  | —      | 0.05  | —               | 0      | 0.05   | —      | 0.05 |      |   |
| 15   |                            |                        | —   | 0.05   | —     | 0               | 0.05   | —      | 0.05   | —    |      |   |
|  |                            | V <sub>OH</sub>        | 5.0   | 4.95   | —     | 4.95            | 5.0    | —      | 4.95   | —    | Vdc  |   |
|  |                            |                        | 10  | 9.95   | —     | 9.95            | 10     | —      | 9.95   | —    |      |   |
|  |                            |                        | 15  | 14.95  | —     | 14.95           | 15     | —      | 14.95  | —    |      |   |
| Input Voltage<br>(V <sub>O</sub> = 4.5 or 0.5 Vdc)<br>(V <sub>O</sub> = 9.0 or 1.0 Vdc)<br>(V <sub>O</sub> = 13.5 or 1.5 Vdc)<br><br>(V <sub>O</sub> = 0.5 or 4.5 Vdc)<br>(V <sub>O</sub> = 1.0 or 9.0 Vdc)<br>(V <sub>O</sub> = 1.5 or 13.5 Vdc)  | "0" Level<br><br>"1" Level | V <sub>IL</sub>        | 5.0   | —      | 1.5   | —               | 2.25   | 1.5    | —      | 1.5  | Vdc  |   |
|  |                            |                        | 10  | —      | 3.0   | —               | 4.50   | 3.0    | —      | 3.0  |      |   |
| 15   |                            |                        | —   | 4.0    | —     | 6.75            | 4.0    | —      | 4.0    | —    |      |   |
|  |                            | V <sub>IH</sub>        | 5.0   | 3.5    | —     | 3.5             | 2.75   | —      | 3.5    | —    | Vdc  |   |
|  |                            |                        | 10  | 7.0    | —     | 7.0             | 5.50   | —      | 7.0    | —    |      |   |
|  |                            |                        | 15  | 11     | —     | 11              | 8.25   | —      | 11     | —    |      |   |
| Output Drive Current<br>(V <sub>OH</sub> = 2.5 Vdc)<br>(V <sub>OH</sub> = 4.6 Vdc)<br>(V <sub>OH</sub> = 9.5 Vdc)<br>(V <sub>OH</sub> = 13.5 Vdc)<br><br>(V <sub>OL</sub> = 0.4 Vdc)<br>(V <sub>OL</sub> = 0.5 Vdc)<br>(V <sub>OL</sub> = 1.5 Vdc) | Source                     | I <sub>OH</sub>        | 5.0   | - 3.0  | —     | - 2.4           | - 4.2  | —      | - 1.7  | —    | mAdc |   |
|  |                            |                        | 5.0   | - 0.64 | —     | - 0.51          | - 0.88 | —      | - 0.36 | —    |      |   |
| 10   |                            |                        | - 1.6   | —      | - 1.3 | - 2.25          | —      | - 0.9  | —      |      |      |   |
| 15   |                            |                        | - 4.2   | —      | - 3.4 | - 8.8           | —      | - 2.4  | —      |      |      |   |
|  | Sink                       | I <sub>OL</sub>        | 5.0   | 0.64   | —     | 0.51            | 0.88   | —      | 0.36   | —    | mAdc |   |
|  |                            |                        |   | 10     | 1.6   | —               | 1.3    | 2.25   | —      | 0.9  |      | — |
|  |                            |                        |   | 15     | 4.2   | —               | 3.4    | 8.8    | —      | 2.4  |      | — |
| Input Current  | I <sub>in</sub>            | 15                     | —   | ± 0.1  | —     | ± 0.00001       | ± 0.1  | —      | ± 1.0  | µAdc |      |   |
| Input Capacitance<br>(V <sub>in</sub> = 0)   | C <sub>in</sub>            | —                      | —   | —      | —     | 5.0             | 7.5    | —      | —      | pF   |      |   |
| Quiescent Current<br>(Per Package)   | I <sub>DD</sub>            | 5.0                    | —   | 5.0    | —     | 0.005           | 5.0    | —      | 150    | µAdc |      |   |
|  |                            | 10                     | —   | 10     | —     | 0.010           | 10     | —      | 300    |      |      |   |
|  |                            | 15                     | —   | 20     | —     | 0.015           | 20     | —      | 600    |      |      |   |
| Total Supply Current (Notes 3 & 4)<br>(Dynamic plus Quiescent,<br>Per Package)<br>(C <sub>L</sub> = 50 pF on all outputs, all<br>buffers switching)  | I <sub>T</sub>             | 5.0<br>10<br>15        | I <sub>T</sub> = (0.3 µA/kHz) f + I <sub>DD</sub><br>I <sub>T</sub> = (0.7 µA/kHz) f + I <sub>DD</sub><br>I <sub>T</sub> = (1.0 µA/kHz) f + I <sub>DD</sub> |        |       |                 |        |        |        | µAdc |      |   |

2. Data labelled "Typ" is not to be used for design purposes but is intended as an indication of the IC's potential performance.

3. The formulas given are for the typical characteristics only at 25° C.

4. To calculate total supply current at loads other than 50 pF:

$$I_T(C_L) = I_T(50 \text{ pF}) + (C_L - 50) \text{ Vfk}$$

where: I<sub>T</sub> is in µA (per package), C<sub>L</sub> in pF, V = (V<sub>DD</sub> - V<sub>SS</sub>) in volts, f in kHz is input frequency, and k = 0.001.

# MC14018B

## SWITCHING CHARACTERISTICS (Note 5) ( $C_L = 50 \text{ pF}$ , $T_A = 25^\circ\text{C}$ )

| Characteristic   | Symbol                   | $V_{DD}$<br>$V_{dc}$ | All Types         |                   |                     | Unit |
|--|--------------------------|----------------------|-------------------|-------------------|---------------------|------|
|  |                          |                      | Min               | Typ<br>(Note 6)   | Max                 |      |
| Output Rise and Fall Time<br>$t_{TLH}$ , $t_{THL} = (1.35 \text{ ns/pF}) C_L + 32 \text{ ns}$<br>$t_{TLH}$ , $t_{THL} = (0.6 \text{ ns/pF}) C_L + 20 \text{ ns}$<br>$t_{TLH}$ , $t_{THL} = (0.4 \text{ ns/pF}) C_L + 20 \text{ ns}$                        | $t_{TLH}$ , $t_{THL}$    | 5.0<br>10<br>15      | —<br>—<br>—       | 100<br>50<br>40   | 200<br>100<br>80    | ns   |
| Propagation Delay Time<br>Clock to $\bar{Q}$<br>$t_{PLH}$ , $t_{PHL} = (0.90 \text{ ns/pF}) C_L + 265 \text{ ns}$<br>$t_{PLH}$ , $t_{PHL} = (0.36 \text{ ns/pF}) C_L + 102 \text{ ns}$<br>$t_{PLH}$ , $t_{PHL} = (0.26 \text{ ns/pF}) C_L + 72 \text{ ns}$ | $t_{PLH}$ ,<br>$t_{PHL}$ | 5.0<br>10<br>15      | —<br>—<br>—       | 310<br>120<br>85  | 620<br>240<br>170   | ns   |
| Reset to $\bar{Q}$<br>$t_{PLH} = (0.90 \text{ ns/pF}) C_L + 325 \text{ ns}$<br>$t_{PLH} = (0.36 \text{ ns/pF}) C_L + 132 \text{ ns}$<br>$t_{PLH} = (0.26 \text{ ns/pF}) C_L + 81 \text{ ns}$   |                          | 5.0<br>10<br>15      | —<br>—<br>—       | 370<br>150<br>100 | 740<br>300<br>200   | ns   |
| Preset Enable to $\bar{Q}$<br>$t_{PLH}$ , $t_{PHL} = (0.90 \text{ ns/pF}) C_L + 325 \text{ ns}$<br>$t_{PLH}$ , $t_{PHL} = (0.36 \text{ ns/pF}) C_L + 132 \text{ ns}$<br>$t_{PLH}$ , $t_{PHL} = (0.26 \text{ ns/pF}) C_L + 81 \text{ ns}$                   |                          | 5.0<br>10<br>15      | —<br>—<br>—       | 370<br>150<br>100 | 740<br>300<br>200   | ns   |
| Setup Time<br>Data (Pin 1) to Clock  | $t_{su}$                 | 5.0<br>10<br>15      | 200<br>100<br>80  | 0<br>0<br>0       | —<br>—<br>—         | ns   |
| Jam Inputs to Preset Enable  |                          | 5.0<br>10<br>15      | 200<br>100<br>80  | 0<br>0<br>0       | —<br>—<br>—         | ns   |
| Data (Jam Inputs)–to–Preset Enable Hold Time   | $t_h$                    | 5.0<br>10<br>15      | 540<br>500<br>480 | 270<br>250<br>240 | —<br>—<br>—         | ns   |
| Clock Pulse Width  | $t_{WH}$                 | 5.0<br>10<br>15      | 400<br>200<br>160 | 200<br>100<br>80  | —<br>—<br>—         | ns   |
| Reset or Preset Enable Pulse Width   | $t_{WH}$                 | 5.0<br>10<br>15      | 290<br>130<br>110 | 145<br>65<br>55   | —<br>—<br>—         | ns   |
| Clock Rise and Fall Time   | $t_{TLH}$ , $t_{THL}$    | 5.0<br>10<br>15      | No Limit          |                   |                     | ns   |
| Clock Pulse Frequency  | $f_{cl}$                 | 5.0<br>10<br>15      | —<br>—<br>—       | 2.5<br>6.5<br>8.0 | 1.25<br>3.25<br>4.0 | MHz  |

5. The formulas given are for the typical characteristics only at  $25^\circ\text{C}$ .

6. Data labelled "Typ" is not to be used for design purposes but is intended as an indication of the IC's potential performance.


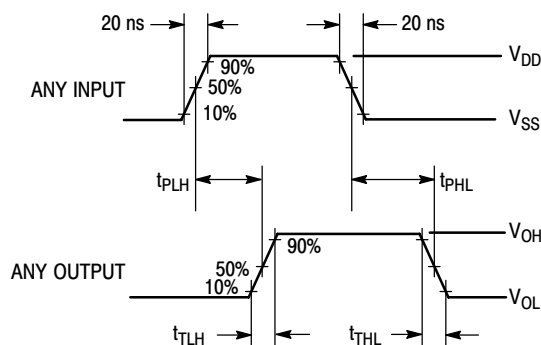


Figure 1. Switching Time Waveforms

# MC14018B


**TIMING DIAGRAM**  
( $\bar{Q}5$  Connected to Data Input)

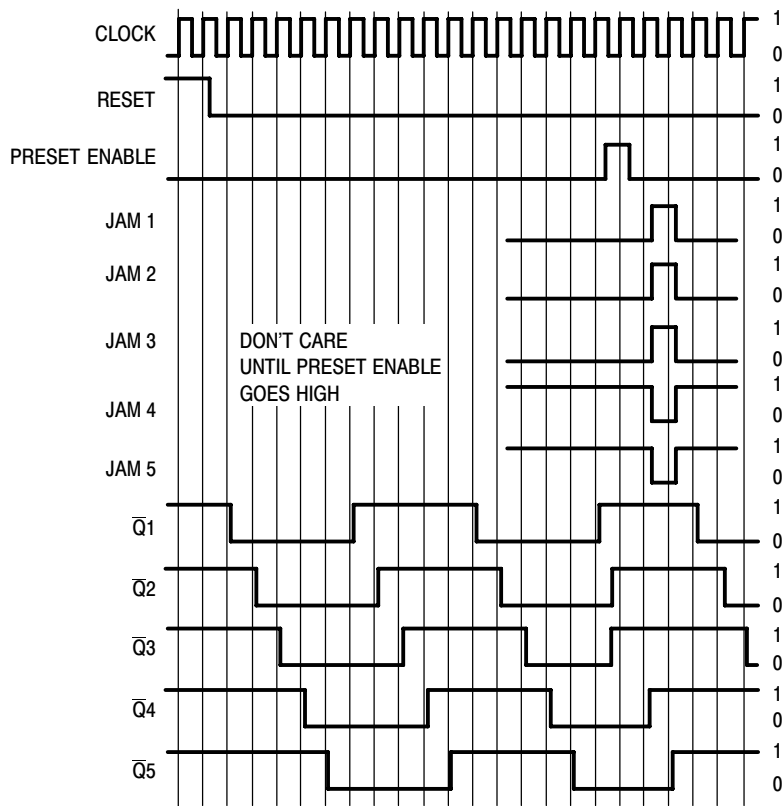

## FUNCTION SELECTION

| Counter Mode   | Connect Data Input (Pin 1) to:                                     | Comments   |
|--|--|--|
| Divide by 10<br>Divide by 8<br>Divide by 6<br>Divide by 4<br>Divide by 2 | $\bar{Q}5$<br>$\bar{Q}4$<br>$\bar{Q}3$<br>$\bar{Q}2$<br>$\bar{Q}1$ | No external components needed.   |
| Divide by 9<br>Divide by 7<br>Divide by 5<br>Divide by 3                 | $Q5 \cdot Q4$<br>$Q4 \cdot Q3$<br>$Q3 \cdot Q2$<br>$Q2 \cdot Q1$   | Gate package needed to provide AND function. Counter Skips all 1's state |


## LOGIC DIAGRAM

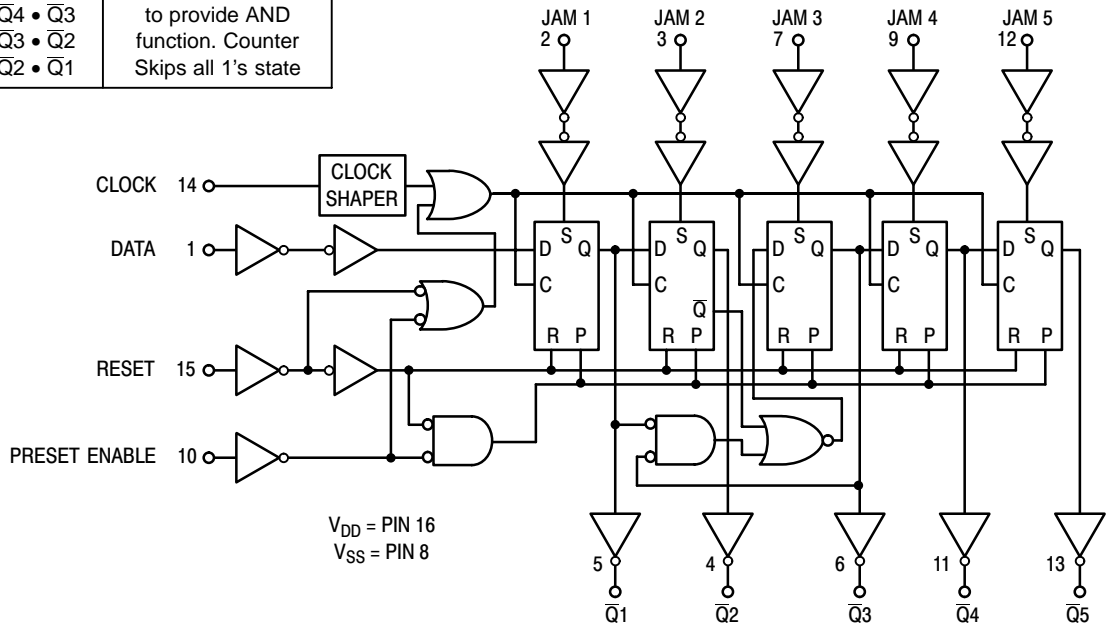

# MC14018B

## PACKAGE DIMENSIONS

PDIP-16  
P SUFFIX  
PLASTIC DIP PACKAGE  
CASE 648-08  
ISSUE T

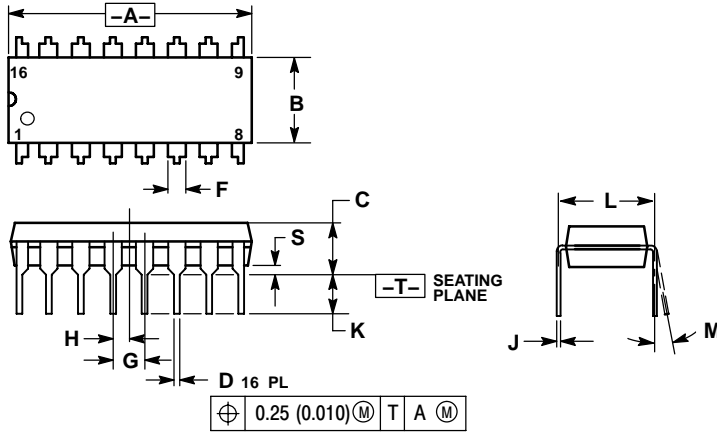

**NOTES:**


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
5. ROUNDED CORNERS OPTIONAL.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.740     | 0.770 | 18.80       | 19.55 |
| B   | 0.250     | 0.270 | 6.35        | 6.85  |
| C   | 0.145     | 0.175 | 3.69        | 4.44  |
| D   | 0.015     | 0.021 | 0.39        | 0.53  |
| F   | 0.040     | 0.70  | 1.02        | 1.77  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.050 BSC |       | 1.27 BSC    |       |
| J   | 0.008     | 0.015 | 0.21        | 0.38  |
| K   | 0.110     | 0.130 | 2.80        | 3.30  |
| L   | 0.295     | 0.305 | 7.50        | 7.74  |
| M   | 0°        | 10°   | 0°          | 10°   |
| S   | 0.020     | 0.040 | 0.51        | 1.01  |

# MC14018B

## PACKAGE DIMENSIONS

SOIC-16  
D SUFFIX  
PLASTIC SOIC PACKAGE  
CASE 751B-05  
ISSUE J

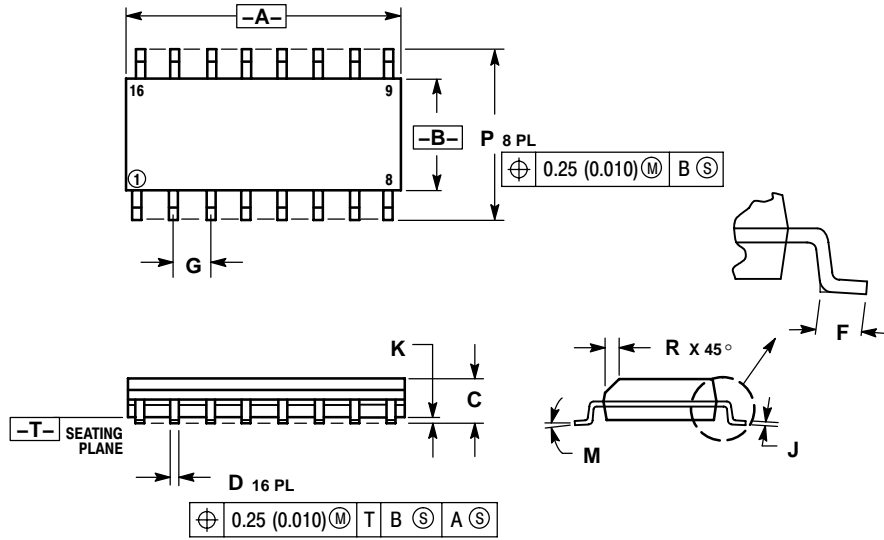

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 9.80        | 10.00 | 0.386     | 0.393 |
| B   | 3.80        | 4.00  | 0.150     | 0.157 |
| C   | 1.35        | 1.75  | 0.054     | 0.068 |
| D   | 0.35        | 0.49  | 0.014     | 0.019 |
| F   | 0.40        | 1.25  | 0.016     | 0.049 |
| G   | 1.27 BSC    |       | 0.050 BSC |       |
| J   | 0.19        | 0.25  | 0.008     | 0.009 |
| K   | 0.10        | 0.25  | 0.004     | 0.009 |
| M   | 0°          | 7°    | 0°        | 7°    |
| P   | 5.80        | 6.20  | 0.229     | 0.244 |
| R   | 0.25        | 0.50  | 0.010     | 0.019 |

# MC14018B

**ON Semiconductor** and **ON** are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 61312, Phoenix, Arizona 85082-1312 USA  
**Phone:** 480-829-7710 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 480-829-7709 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Japan:** ON Semiconductor, Japan Customer Focus Center  
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051  
**Phone:** 81-3-5773-3850

**ON Semiconductor Website:** <http://onsemi.com>

**Order Literature:** <http://www.onsemi.com/litorder>

For additional information, please contact your  
local Sales Representative.