



MA 001C (DB9M/25M ADAPTOR)
 PIN OUT: 09Male 25Male

1	-----	8
2	-----	3
3	-----	2
4	-----	20
5	-----	7
6	-----	6
7	-----	4
8	-----	5
9	-----	22
G	-----	G

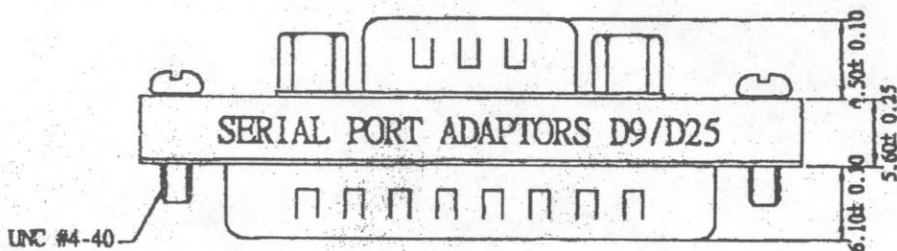


Label: orange color with white character
 One side: SERIAL PORT ADAPTORS D9/D25
 The other side: MINI ADAPTER
 SPECIFICATION
 INSULATOR: PBT Glass fibre reinforced UL 94 V0
 CONTACT: Brass
 CONTACT PLATING: Gold plated over nickel
 SHELL: Tin plated shell
 CURRENT RATING: 3 AMP
 DIELECTRIC STRENGTH: 500V AC for one minute
 INSULATOR RESISTANCE: 500M Ω min at 500V DC
 TEMPERATURE: -25 $^{\circ}$ C — +105 $^{\circ}$ C

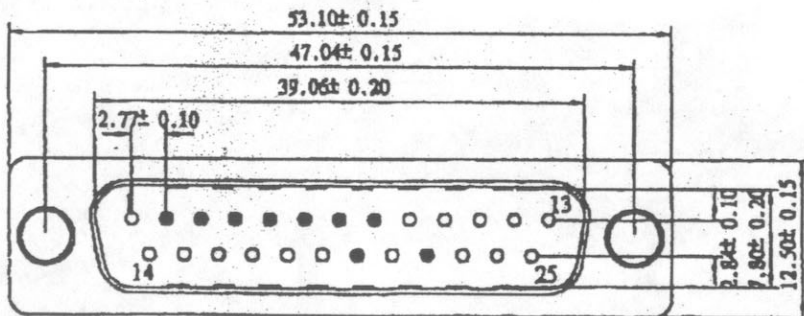

AB467

Edition A01
 SCALE 2:1
 UNIT mm
 Page 1/1



ASSMANN

DATE 8/Dec-2001

DRAWN *Fu Hao* CHECKED APPRD

Customer	REVISION	DESCRIPTION	DATE
	1		2001/12/8