
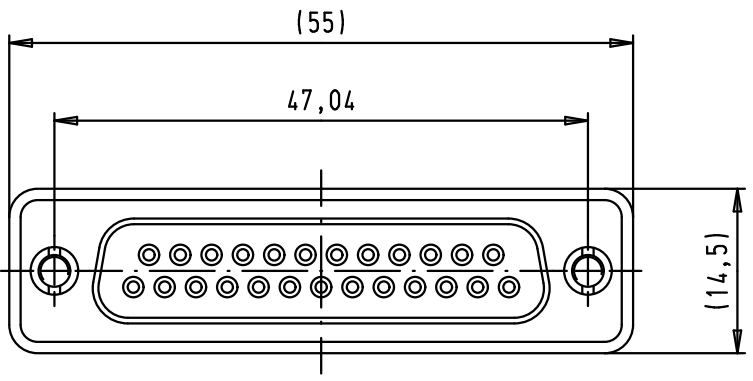
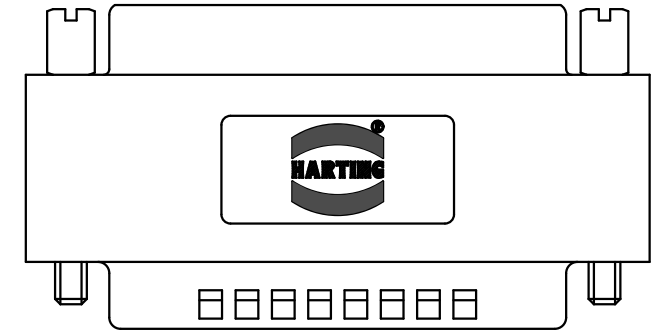



5 4 3 2 1

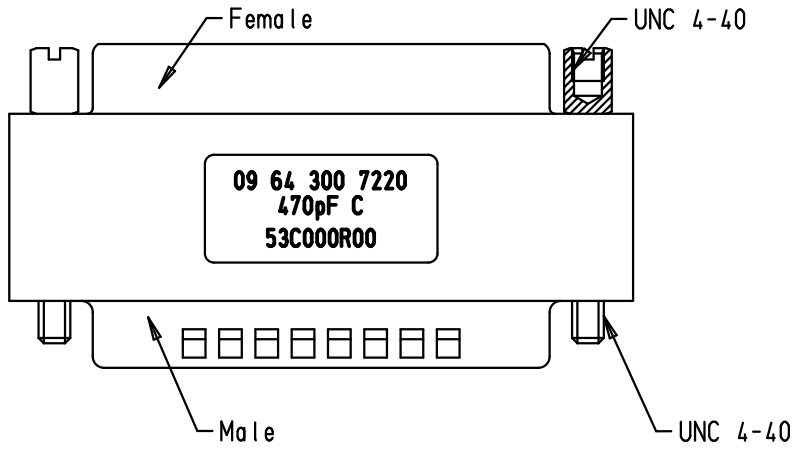


SPECIFICATIONS

Filter type	C
Capacitance	470 pF±20%
Working voltage	100 V
Current rating	6,5 A

Minimum insertion loss

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	1
50	10
100	15
500	35
1000	32

Note: Jack-screws are not pre-mounted to allow mounting from any ends

				Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	Male / Female D-Sub filter adapter, 25 poles, 470 pF	Maßstab/ Scale
			Detail.	03/09/07	JS			1,5:1
34901	01/04/08	BB	Insp.					
34894	12/03/08	PK	Stand.					Blatt/ Page
	03/09/07	JS					TB 09 64 300 7220	1 / 1
Mod.	Dot.	Name					Sub.	

HARTING EURL
F-95972 Paris



TB 09 64 300 7220

1 / 1