


LTR	REV.	DESCRIPTION	DATE
⚠	E	ECN # 021007-3 CHANGE PACKING	10/07/02

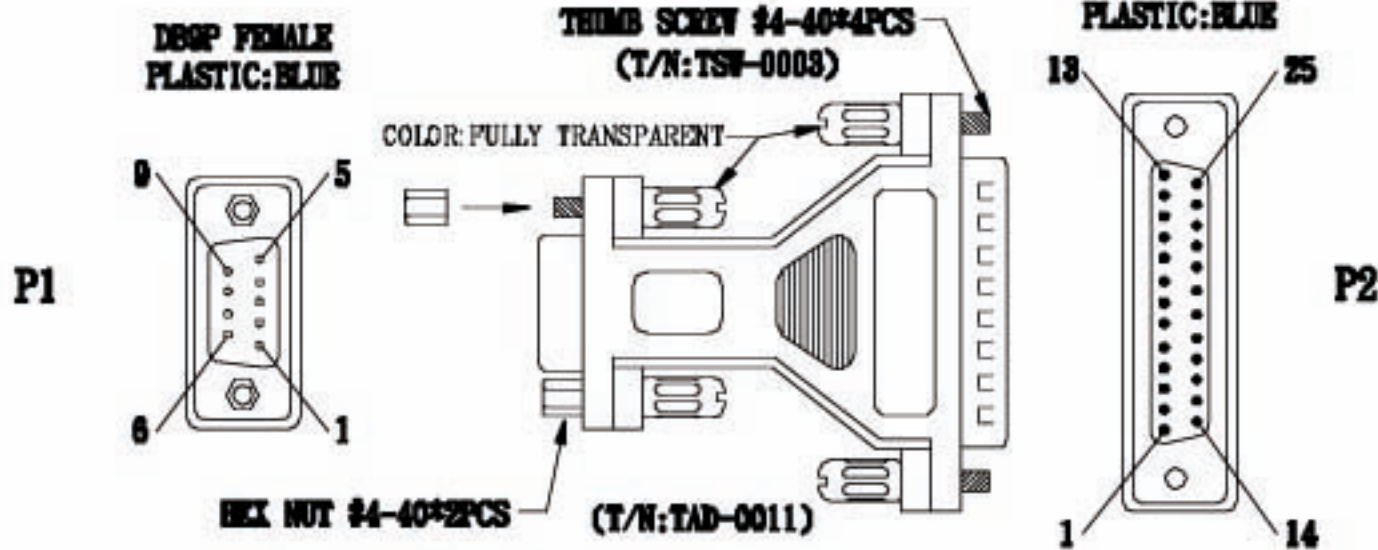


WIRING LIST

P1	P2
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
SHELL	SHELL

NOTE (FOR DB9F/DB25M ADAPTOR):

1. HOOK UP WIRE: 28AWG(7/0, 127) TINNED COPPER
2. CONNECTOR:
 - P1: DB9F FEMALE GOLD FLASH CONTACT, NICKEL PLATED SHELL
 - P2: DB25P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL
3. P1&P2: INNER MOLDED MUST BE WRAPPED ALUMINUM
4. HOOD: MOLDED TYPE PVC 45P COLOR: DARK GRAY TRANSPARENT(NK-K02)
5. TEST REQUEST:
 - ①. 100% OPEN SHORT & HIS WIRE TEST
 - ②. CONTACT RESISTANCE 3Ω MAX
 - ③. INSULATION RESISTANCE 20MΩ MIN

6. PACKING: (EACH ADAPTOR/POLYBAG+USB TO SERIAL CABLE +1PC DRIVER DISK) / BLISTER (BLISTER CARD WITH DIGITUS ARTWORK PROVIDED BY CUSTOMER) + EAN CODE:4016032117940

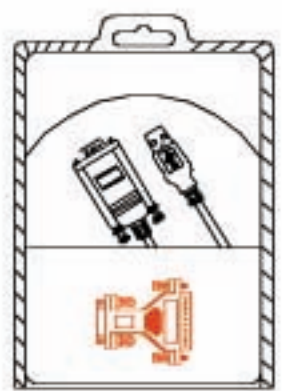

Tolerance	Inch	M/M
X	.175	.01
XX	.118	.01
XXX	.105	.01

ASSMANN Electronics

Title: **USB TO SERIAL CABLE WITH DB9F/DB25M ADAPTOR**

Draw	KIKI 10/07		Customer P/N	AB914
Check	App'd	Customer:	E-SH	
Engr	Scale	NONE	Units	m/m
	Dwg No.	170-0000	REV:	E
			Sheet	2/2