

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1731120465](#)
Status: **Active**
Overview: [FCT D-Sub Connectors](#)
Description: FCT Coaxial Contact, Female, Straight, Crimp, 50 Ohms, 0.20µm Gold Plating, for RG-174U, RG-188AU, or RG-316U Cable

Documents:

[Drawing \(PDF\)](#) [Brochure \(PDF\)](#)
[Application Specification 2195600660-000 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

| | |
|------------------|--------------------------------------|
| Product Family | D-Sub Products |
| Series | 173112 |
| Contact Type | Coaxial |
| Overview | FCT D-Sub Connectors |
| Product Category | Contacts |
| Product Name | FCT Products |
| Taxonomy | D-Sub Contacts |
| Type | Mixed Layout |
| UPC | 191128237659 |
| Wire/Cable Type | RG-174U, RG-188AU, RG-316U |

Physical

| | |
|--------------------------------|------------------|
| Durability (mating cycles max) | 200 |
| Gender | Female |
| Material - Contact | Copper Alloy |
| Net Weight | 1.500/g |
| Orientation | Straight |
| Packaging Type | Bag |
| Plating - Contact | Gold over Nickel |
| Plating min - Mating | 0.200µm |
| Plating min - Termination | 0.200µm |
| Temperature Range - Operating | -55° to +135°C |
| Termination Style | Crimp |

Electrical


| | |
|-------------------------------|------|
| Current - Maximum per Contact | 2.0A |
| Impedance | 50Ω |

Material Info

| | |
|--------------------|------------|
| Engineering Number | FMS001S101 |
|--------------------|------------|

Reference - Drawing Numbers

| | |
|---------------------------|----------------|
| Application Specification | 2195600660-000 |
| Sales Drawing | 1731120465-000 |

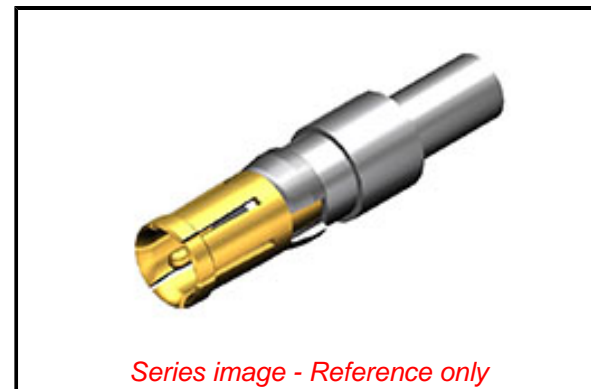

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant with Exemption 6(c)

REACH SVHC

Contained Per -
D(2021)10043-DC (17
Jan 2022)

Lead

Halogen-Free

Status

Not Reviewed

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

50 Image

Not Relevant

Not Contained

Search Parts in this Series

[173112 Series](#)

Use With

FCT Mixed Layout Connectors