



used for: D-SUB



Wire size AWG	Crimp height A
24	0,68 - 0,86
22	0,68 - 0,86
20	0,68 - 0,86

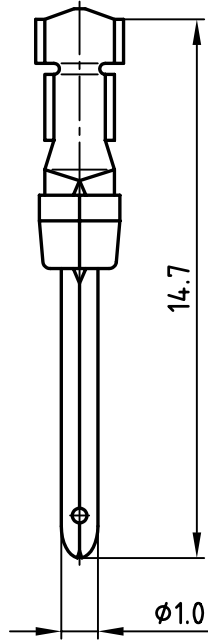

STRIPPING DIMENSIONS

Finish	Part-NO.
8µ" hard-gold-plated in the contact area	163A20679X
30µ" hard-gold-plated in the contact area	163C20679X

NOTES:
 Material: phosphor bronze
 Finish: see table
 Temperature range: -55°C to +125°C
 Rated current: 7.5A
 Contact resistance: <= 10mOhm
 Crimping: use crimp tool 360X10079X

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL



THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
 OWNERSHIP AND COPYRIGHT OF CONEC GmbH
 DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name	tolerance	dim. in mm
		2005	date		
		drawn	07.04.		Lehmenkühler
		appd.	07.04.		Mickenbecker
		norm			
		d-old			



scale:	5:1
material:	SEE NOTES
title:	PLUG CONTACT CRIMP AWG24-20 (separate contacts)
dwg no:	AutoCAD 2004
	16K1A1363
part no:	SEE TABLE
	DIN-A 4 sh: 1/1