
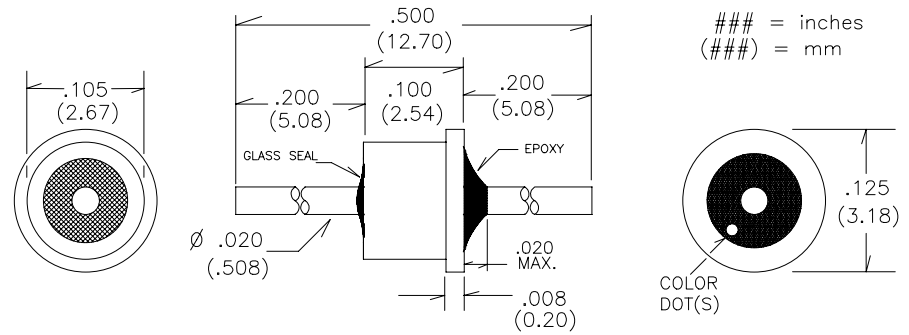


XSC102D  
 MINI .105" DIAMETER  
 1,000pF HERMETIC SOLDER-IN



- \* RoHS Compliant
- \* Discoidal Capacitor Construction

PART NUMBER	EMI P/N	CAP. (pF)	COLOR DOT(S)	MAX. WVDC	DC AMPS	MINIMUM NO LOAD INSERTION LOSS				
						1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
XSC102D		1,000	WHITE	200	5	-	5	20	35	45

**ELECTRICAL**

CAPACITANCE TOLERANCE: +100/-0%

DISSIPATION FACTOR: 3.5% MAX.

INSULATION RESISTANCE:  
 25° C=10,000 Mohm Min.  
 125° C=1,000 Mohm Min.

DIELECTRIC STRENGTH (DWV):  
 250% of WVDC (5 seconds)

TEMPERATURE CHARACTERISTIC:  
 X7R or better

**PHYSICAL**

DIMENSION TOLERANCE:  
 CASE LENGTH: +/- .010" (.250mm)  
 LEAD LENGTH: +/- .030" (.762mm)  
 LEAD DIAMETER: +/- .002" (.051mm)

MATERIAL AND FINISH:  
 CASE: C12L14 CRS  
 LEAD: Alloy 52  
 FINISH: GOLD per MIL-G-45204  
 TYPE III, GRADE A, CLASS 1

**IDENTIFICATION & LIMITS**

MARKING: Color Dot standard per chart

OPERATING TEMP: -55° C to +125° C

INSTALLATION TEMPERATURE: 225° - 250° C

VENDOR:  
 EMI FILTER COMPANY  
 12750 59th Way N.  
 Clearwater, FL 33760  
 (727) 585-7990  
 (727) 586-5138 FAX  
 www.emifiltercompany.com

FILTERS, EMI, MINIATURE,  
 SOLDER-IN STYLE, STANDARD SEAL

FSCM NO.	DWG NO.	REV
	XSC102D REVD	D