




This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**



**Electrical Testing**  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

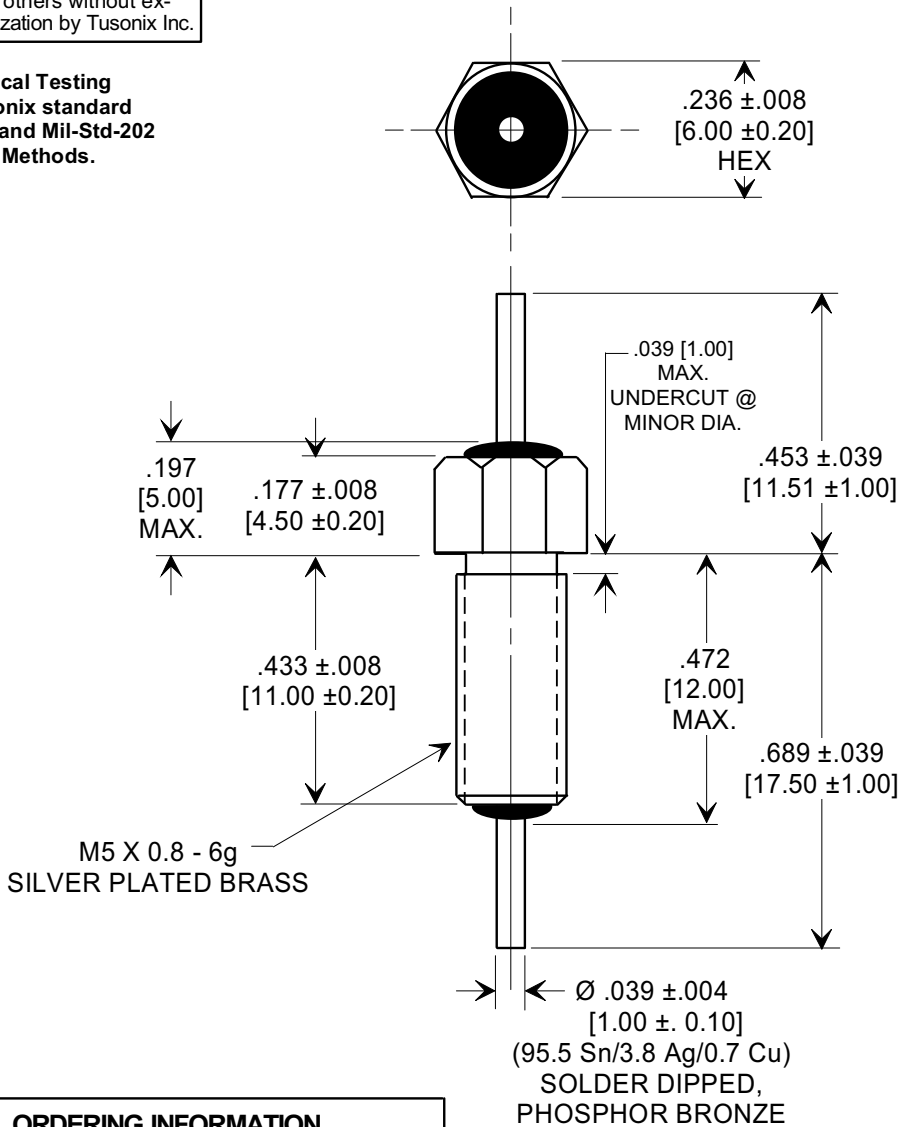

**NOTES:**

1. TUSONIX LF PART IS RoHS COMPLIANT.
2. NO MOUNTING HARDWARE SUPPLIED.
3. TUSONIX TRADEMARK, CAPACITANCE CODE AND TOLERANCE CODE STAMPED ON HEX, GREEN INK.
4. MOUNTING TORQUE: 3.5 LB IN. [0.395 N-M] MAX.

**ORDERING INFORMATION**

TUSONIX STYLE	2499
VALUE	5000 pF
VALUE TOL.	+80% -20%
TEMP. COEF.	X7W
RATING	500VDC @ +85°C
OPERATING RANGE	-55°C TO +125°C
CURRENT	10 A
D.F. MAX.	2.5 %
DIELECTRIC WITHSTANDING	500 VAC, 60 SEC. 1000 VDC 1-5 SEC.

X-2015 Rev-0

REVISION RECORD

Original Release  
**ECO-2603**

**A**

--TOLERANCES--  
Unless Otherwise Specified

DECIMAL ± NOTED

ANGLES ±

**TUSONIX**  
TUCSON, ARIZONA

Title **BUSHING TYPE  
FEED THRU  
CAPACITOR**

Drawn L.E. 01-17-12

Scale 3 X

Approved R.L. 01-17-12

**A** 2499-540-X7W0-502Z