
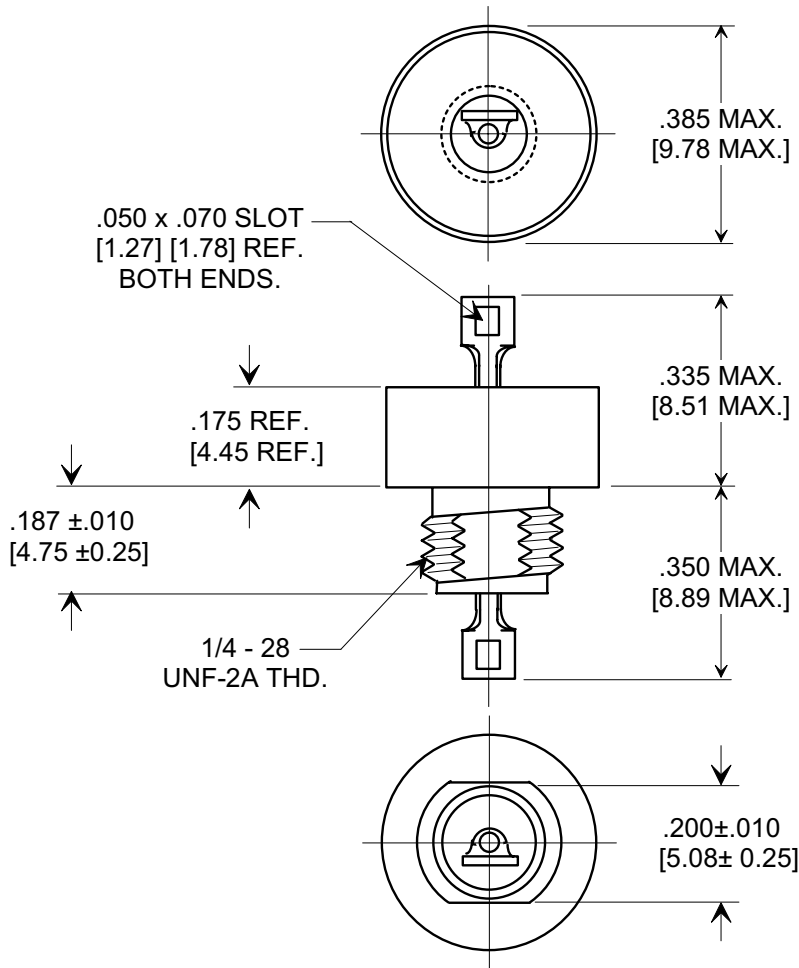





MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



MOUNTING HARDWARE

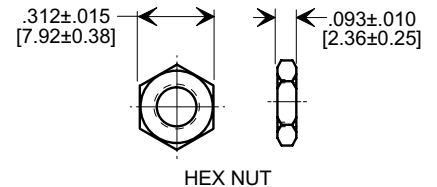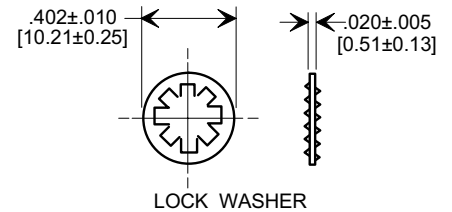

NOTES:

- MATERIALS:**
 BUSHING - TIN PLATED STEEL
 LEAD - SOLDER PLATED COPPER
 NUT - TIN PLATED BRASS
 L'WASHER - TIN PLATED PHOSPHOR BRONZE
- MOUNTING TORQUE:** 8 lb - ins. max
 SEAL TESTED PER MIL-STD-202
 METHOD 112 CONDITION A.
- DCR** - .01Ω max.
- MAX. SOLDER TEMPERATURE** 500°F

MIN. CAP. (μF)	WORKING VOLTAGE DC		CURRENT	IR (MIN.) @ 100 VDC	DWW	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220					
	+85°C	+125°C				30 KHz	100 KHz	300 KHz	1 MHz	10 MHz	1 GHz
1.4	100	70	15 A	500 M Ω	300 VDC	15	25	34	44	60	70

X-2015 Rev-0 REVISION RECORD	0	Original Release C.O. 6769
	1	METRIC DIM'S & NOTES ADDED. E.C. 7-17-92
	2	WVDC REVISED 100 & 70 WERE 80 & 50. L.E. 10-26-92
	3	RDN TO COMP FMP. STYLE DWG SPLIT FOR EACH VAR. S.M. 06-19-02
	4	NOTE 1 LEAD WAS SILVER. S.M. 02-02-04
--TOLERANCES-- Unless Otherwise Specified		Title " C " TYPE COAXIAL BROADBAND FILTER - HERMETICALLY SEALED
DECIMAL ± // //		
ANGLES ± // //		Drawn S.M. 06-19-02 Scale X 3
TUSONIX TUCSON, ARIZONA		Approved J.Mc 06-19-02
		A 4601-000