MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - [ ]

Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.





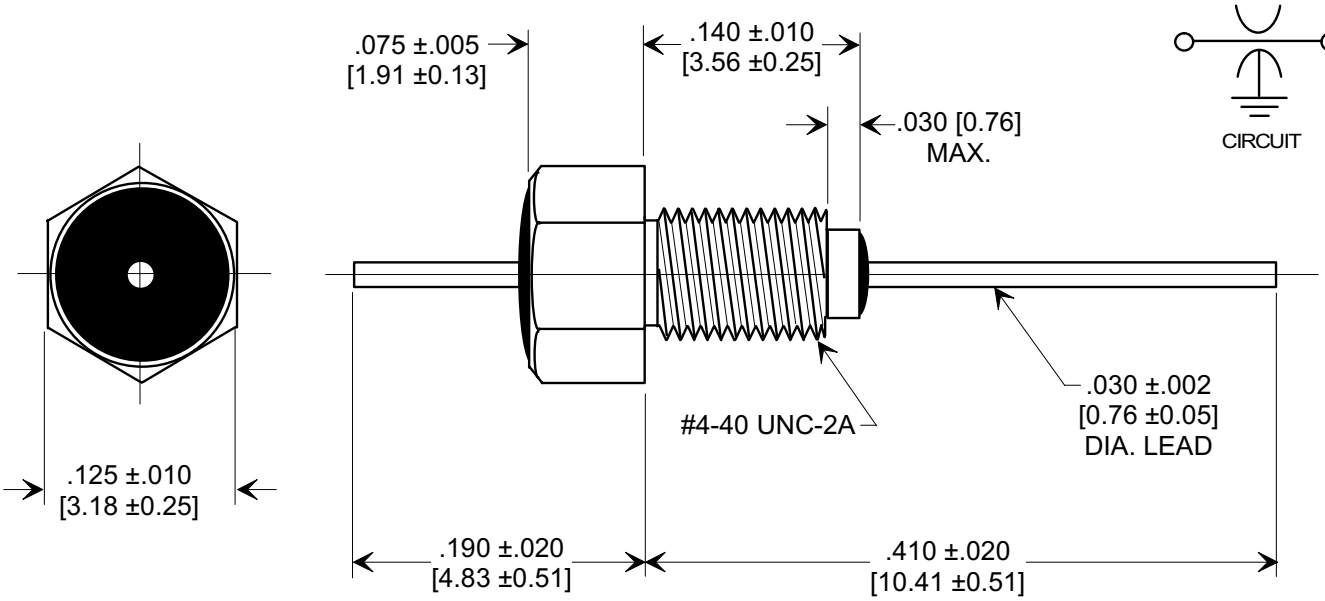

MOUNTING HARDWARE

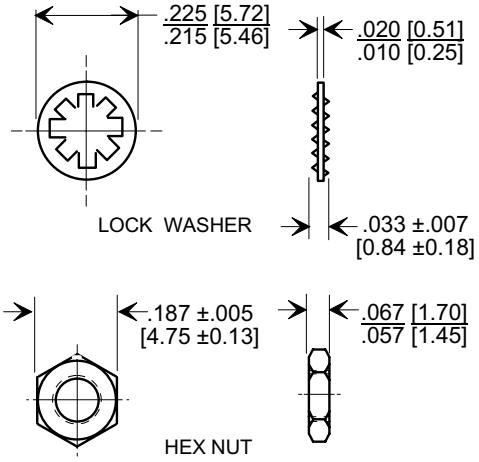

NOTES:
1. OPERATING TEMPERATURE RANGE: -55°C TO +125°C.
2. SILVER PLATED CASE, LEAD AND MOUNTING HARDWARE.
3. MAX. RECOMMENDED MOUNTING TORQUE : 2.0 lb. - in.
4. MAX. RECOMMENDED SOLDERING TEMPERATURE : 260°C. SEE INSTALLATION RECOMMENDATIONS.
5. NUT AND LOCKWASHER INCLUDED.
6. TUSONIX TRADEMARK AND PART VARIATION NUMBER STAMPED ON HEX FLATS.

25	GMV	300	200	10	----	----	----	10	25
CAP.(pf)	TOLERANCE	+85 °C	+125 °C	DC CURRENT (AMPS)	1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
		DC WORKING VOLTAGE			MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220				

REVISION RECORD					
0	Original Release C.O. 6965	-040 & -680 ADDED, DC WAS5. E.C. 11-20-92	1	7052	RDN TO COMP FMT. S.M. 07-16-02	2	20020715-1-27

--TOLERANCES-- Unless Otherwise Specified
DECIMAL ± NOTED
ANGLES ± NOTED

TUSONIX
TUCSON, ARIZONA

Title
MINI BUSHING STYLE EMI FILTER

Drawn **S.M. 06-10-02** Scale **8 X**
Approved **J.Mc. 06-10-02**

A **4403-039**