


28L0138-70R

| STEWARD PART NUMBERING SYSTEM | | | | | |
|-------------------------------|--------------|----------------|-------------------------|------------------------|----------------|
| MATERIAL TYPE | PRODUCT CODE | PART SIZE CODE | SELECTED DIMENSION CODE | ADDITIONAL DESCRIPTION | PACKAGING CODE |
| 28 | J | 0138 | - | 1 | R |

Ambient Operating Temperature Range : -55°C to +125°C

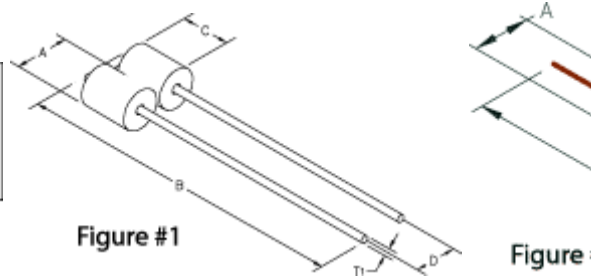

Drawing Figure

| |
|---------------|
| Figure Number |
| 2 |

Electrical Characteristics

| NET @ 10 MHz nom | NET Z @ 25 MHz nom | NET Z @ 100 MHz nom | DCR Max | Rated Current mA |
|------------------|--------------------|---------------------|---------|------------------|
| - | 123 | 220 | 0.01 | 5000 |

Physical Dimensions

| A mm | B mm | C mm | D mm | A in | B in | C in | D in |
|------|-------|-------|------|-------|------|-------|-------|
| 3.51 | 59.00 | 13.97 | 0.64 | 0.138 | 2.32 | 0.550 | 0.025 |

Wire Dimensions

| T1 mm | T1 in |
|-------|-------|
| - | - |

