

CTCBA1206F Series

30Ω to 1000Ω


SPECIFICATIONS

Part Number	Impedance (Ω)	Test Frequency (MHz)	DC Resistance Max. (Ω)	Rated Current Max. (mA)
CTCBA1206F-300S	30±25%	100	0.20	500
CTCBA1206F-600S	60±25%	100	0.25	400
CTCBA1206F-121S	120±25%	100	0.30	350
CTCBA1206F-301S	300±25%	100	0.40	250
CTCBA1206F-601S	600±25%	100	0.50	200
CTCBA1206F-102S	1000±25%	100	0.75	150



PHYSICAL DIMENSIONS


A	B	C	D1	D2	P
3.20±0.20	1.60±0.20	0.90±0.20	0.40±0.15	0.30±0.10	0.80±0.10
0.126±0.008	0.063±0.008	0.035±0.008	0.016±0.006	0.012±0.004	0.031±0.004

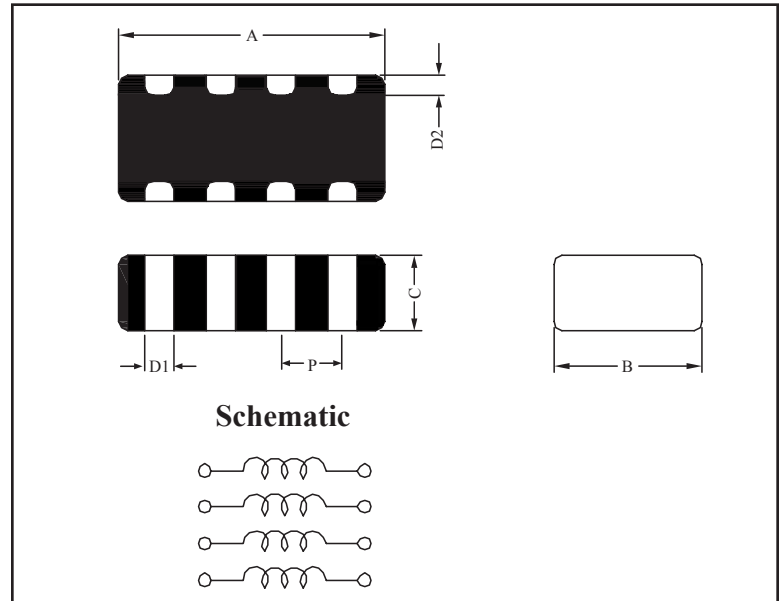

CHARACTERISTICS

- Description:** Ferrite chip beads 4 line array
- Applications:** Interfaces, notebook computers, LCD modules, portable electronics
- Signal Speed:** Standard
- Operating Temperature:** -40°C to 125°C (including self-temperature rise)
- Storage Condition (component in its packaging):**
- Temperature: -10°C to 40°C
 - Humidity: 60%
- Miscellaneous:** RoHS Compliant
- Samples available. See website for ordering information.

PAD LAYOUT

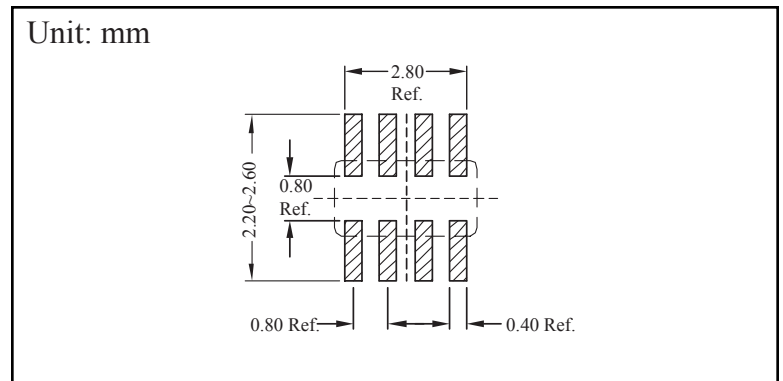

IMPEDANCE VS. FREQUENCY CURVES

