

# 28C0236-0BW

| STEWART PART NUMBERING SYSTEM |              |                |                         |                        |                |
|-------------------------------|--------------|----------------|-------------------------|------------------------|----------------|
| 25                            | C            | 0236           | - 0                     | D                      | W              |
| MATERIAL TYPE                 | PRODUCT CODE | PART SIZE CODE | SELECTED DIMENSION CODE | ADDITIONAL DESCRIPTION | PACKAGING CODE |

Ambient Operating Temperature Range : -55°C to + 125°C

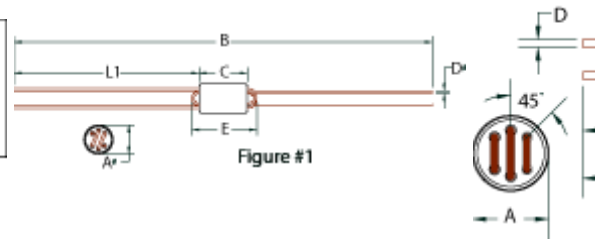


Figure #1

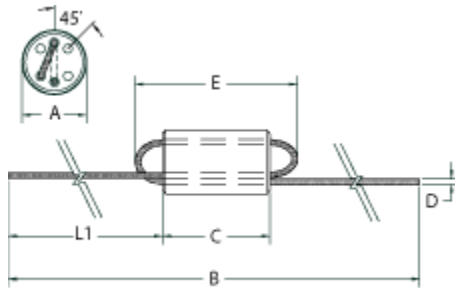


Figure #3




Figure #4

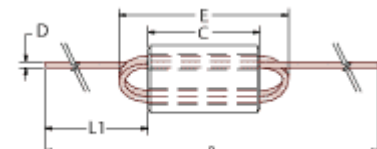


Figure #5

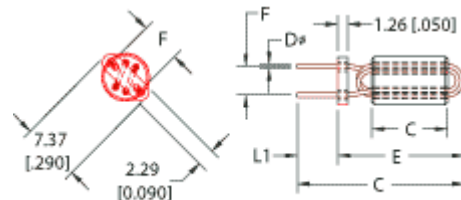


Figure #6

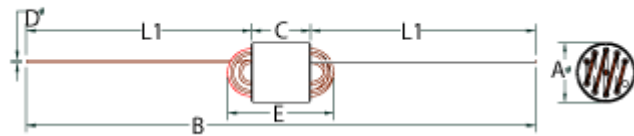


Figure #7

### Drawing Figure #

|               |
|---------------|
| Figure Number |
| 5             |

### Electrical Characteristics

| NET Z<br>@ 100 MHz<br>nom | NET Z<br>@ 300 MHz<br>nom | DCR<br>Max |
|---------------------------|---------------------------|------------|
| 835                       | -                         | -          |

### Physical Dimensions

| A<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | F<br>mm | L1<br>mm | A<br>in | B<br>in | C<br>in | D<br>in | E<br>in | F<br>in | L1<br>in |
|---------|---------|---------|---------|---------|---------|----------|---------|---------|---------|---------|---------|---------|----------|
| 5.99    | 86.46   | 10.00   | 0.51    | 14.61   | -       | 38.10    | 0.236   | 3.404   | 0.394   | 0.020   | 0.575   | -       | 1.50     |

