



**SC**

**MULTIMODE SIMPLEX  
ADAPTOR**

**ZIRCONIA ALIGNEMENT SLEEVE**


Packaging :  
1

**F 7 2 8 7 0 3 7 0 0**

Packaging :  
100

**F 7 2 8 7 1 3 7 0 0**

Original dimensions in mm [inch]

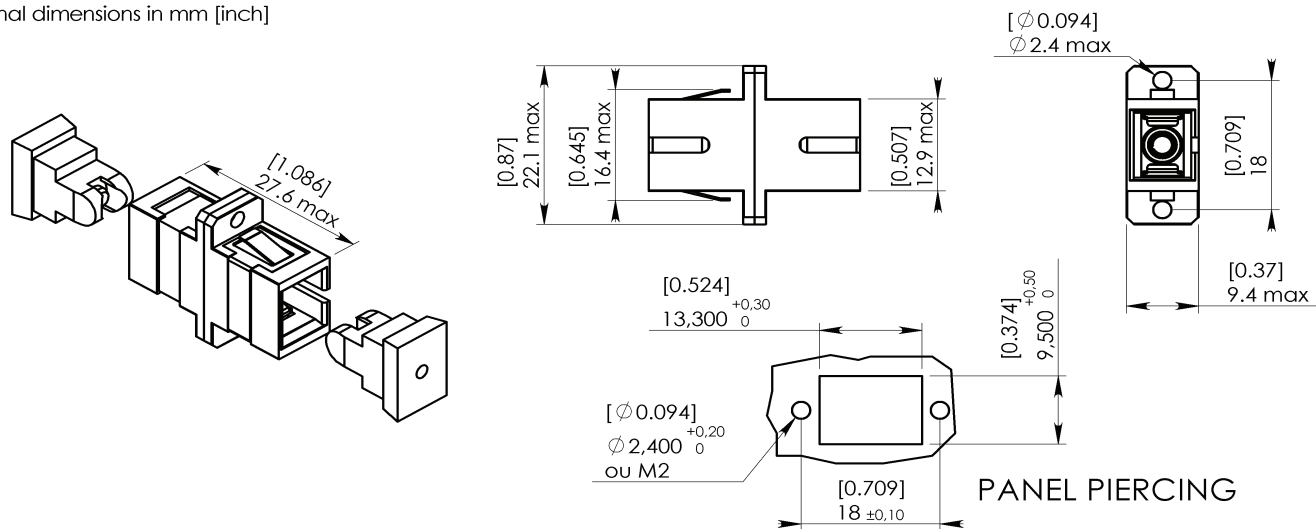

**GENERAL**

- Type** : IEC 61754-4 SC type. Push-pull latching system  
Body color : beige
- Mounting** : snap-in (or screw - in) mounting max. panel thickness 1,6 mm
- Alignment sleeve** : zirconia

**CHARACTERISTICS** (Dependant on fiber or cable construction)

- Material** : **Plastic moulded** Material in accordance with BELLCORE GR 326 CORE Issue 2, par. 3.3.1  
**Clip** stainless steel
- Optic** : Attenuation (according to IEC 1300-3-4:Substitution method, 7 type) at 1310nm : < 0,1 dB
- Mechanical** : **Durability** Bellcore 326, 200 cycles  
**Plug Retention** > 68N
- Environmental** : **Temperature range** (storage/operating) -40°C to +85°C / -40°C to +70°C
- Salt spray** : EIA/TIA-455-16A, 35°C, 168 hr.
- Vibration test** : Bellcore 326, 10 to 50 Hz, 2 hrs./axis
- Proof test** : Bellcore 326, Straight pull : 6,8Kg load at 0°  
Side pull : 3,5 Kg load at 90°

CREATION					
N° :					
PEN/EP : CAT.					
Name : CAUSSE C.					
Date : 23.Jul.99					
App. :	Issue	Revisions	Name	App.	

**RADIALL**

101, rue P. Hoffmann - Z.I. Ouest  
93116 ROSNY / BOIS Cedex-France  
Phone : (0033) 149353535  
Fax : (0033) 48546363