

6

5

4

3

2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/4/20	

D


D

C

C

B

B

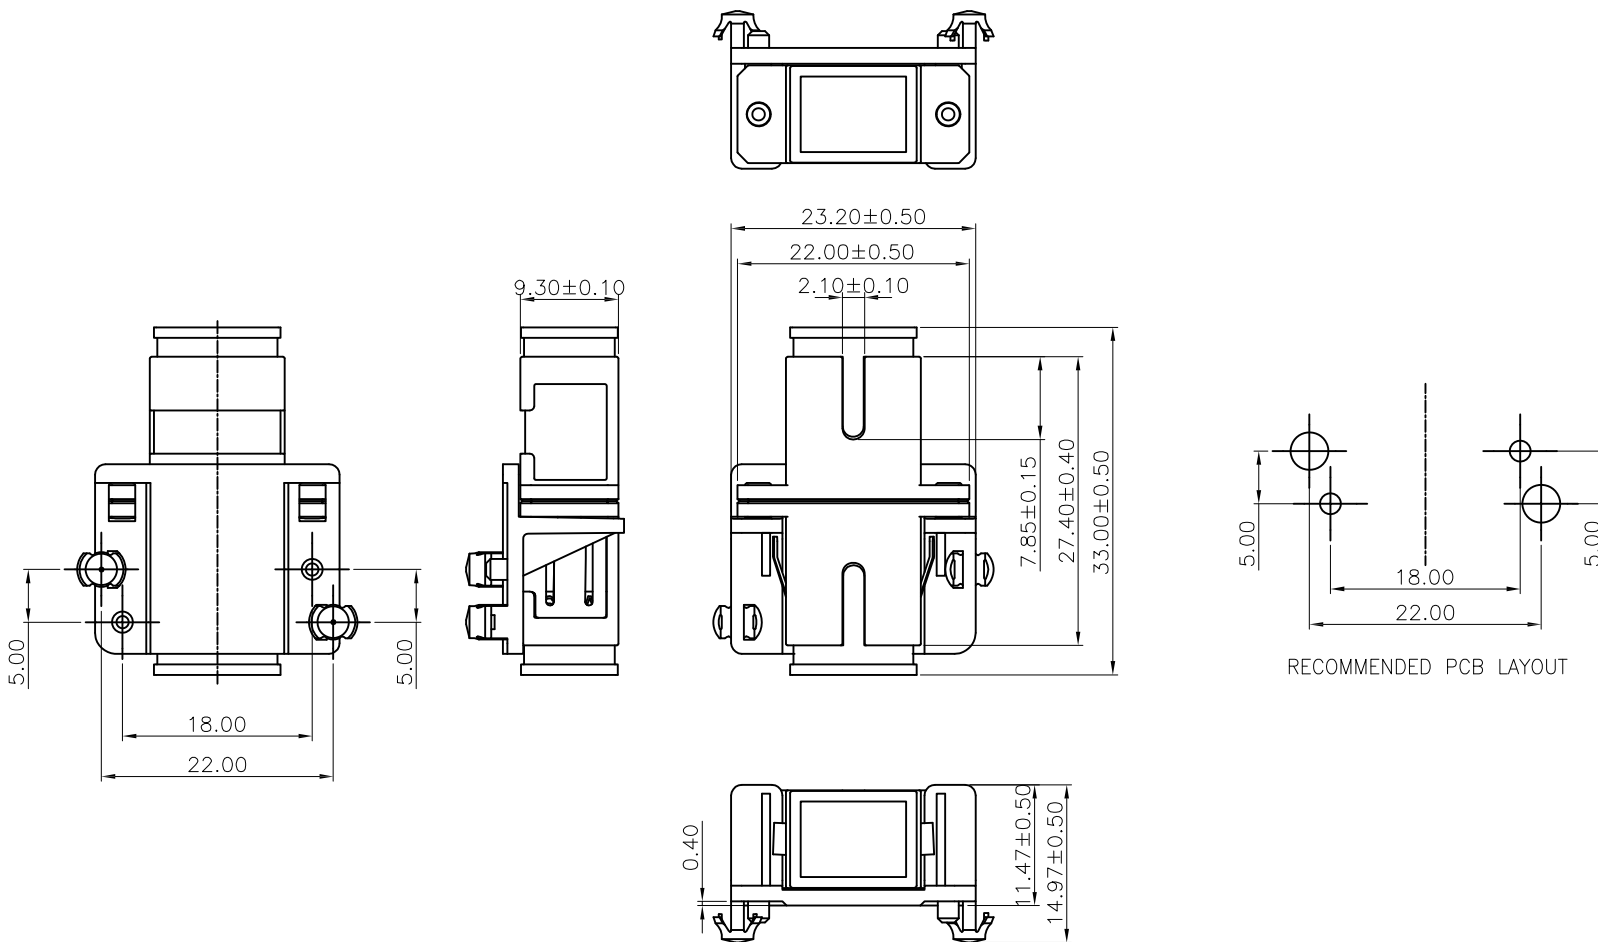

RECOMMENDED PCB LAYOUT

**SPECIFICATIONS:**

Material:  
Housing: PBT, rated UL 94V-0, Color: Blue  
Cap: PBT, rated UL 94V-0, Color: Black  
Electrical:

Standards of IEC, EIA/TIA, Telcordia  
Insertion loss: 0.2dB max  
Mechanism durability (500 cycles min): 0.2dB max  
Temperature Rating:  
Operating temperature: -40°C to +85°C  
Environmental:  
Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED		
MM	ANGLE	
X. ± 0.35	X. ± 2°	
.X ± 0.30	.X ± 1°	
.XX ± 0.25	.XX ± 0.5°	
.XXX ± 0.15	.XXX ± 0.5°	
APPROVALS		DATE
DRAWN	OW	9/4/20
CHECKED	JL	9/4/20
APPROVED		

**ADAM TECH INTERCONNECTS** 909 Rahway Avenue,  
Union, NJ 07083  
Phone: 908-687-5000  
Fax: 908-687-5710

TITLE		
SC TYPE ADAPTER, PC, 1 PORTS, LONG-EARED, WITH SC TWO TYPE DUST CAP, TRANSPARENT FLAT BOTTOM BRACKET		
SIZE	PART NO.	REV.
X	OPSB1ANNC1N1T3	-
REF:	S00005C	SCALE: NTS
		SHEET 1 OF 1

6

5

4

3

2

1

A

A