

**SC**

**APC SIMPLEX ADAPTOR**

**ZIRCONIA ALIGNEMENT SLEEVE**


Packaging :  
1

**F 7 2 8 7 0 3 1 0 0**

Packaging :  
100

**F 7 2 8 7 1 3 1 0 0**

Original dimensions in mm [inch]

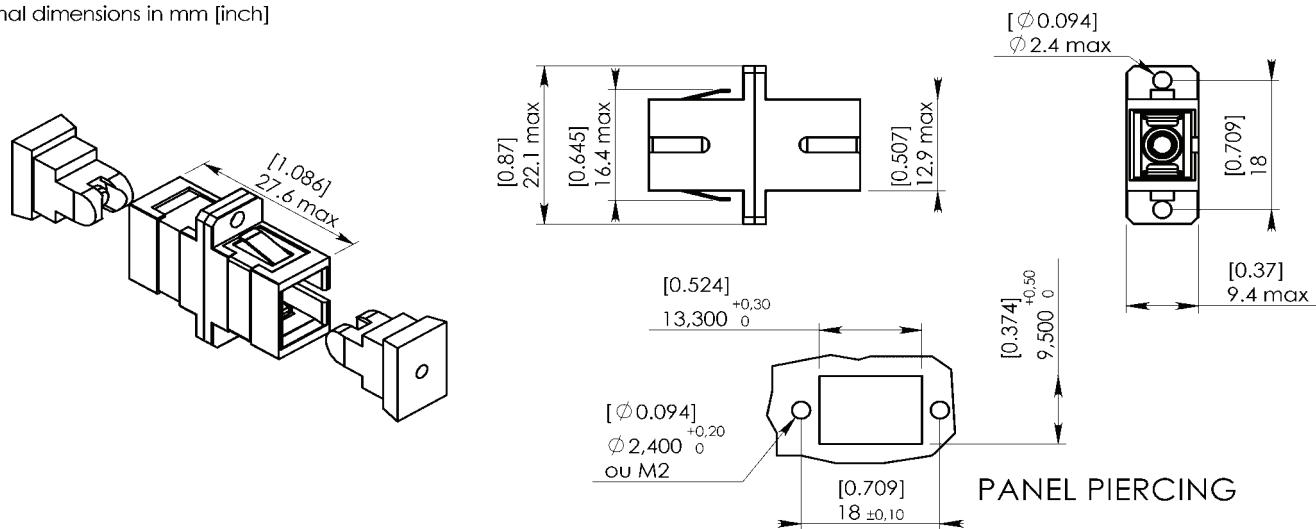

**GENERAL**

**Type** : IEC 61754-4 SC type. Push-pull latching system  
Body color : green

**Mounting** : snap-in (or screw - in) mounting max. panel thickness 1,6 mm

**Alignment sleeve** : zirconia

**CHARACTERISTICS** (Dependant on fiber or cable construction)

**Material** : **Plastic moulded** Material in accordance with BELLCORE GR 326 CORE Issue 2, par. 3.3.1  
**Clip** stainless steel

**Optical** : Attenuation (according to IEC 1300-3-4:Substitution method, 7 type) at 1310nm : 0,11 dB Max  
0,05 dB Typ

**Mechanical** : **Durability** Bellcore 326, 200 cycles  
**Plug Retention** > 68N

**Environmental** : **Temperature range** (storage/operating) -40°C to +85°C / -40°C to +70°C

**Salt spray** : EIA/TIA-455-16A, 35°C, 168 hr.

**Vibration test** : Bellcore 326, 10 to 50 Hz, 2 hrs./axis

**Proof test** : Bellcore 326, Straight pull : 6,8Kg load at 0°  
Side pull : 3,5 Kg load at 90°

CREATION					
N° : 0					
PEN/EP : CAT.					
Name : CAUSSE C.					
Date : 23 Jul.99	01/09/02	performance specified	VALENCIA		
App. : L V	Issue	Revisions	Name	App.	

**RADIALL**

101, rue P. Hoffmann - Z.I. Ouest  
93116 ROSNY / BOIS Cedex-France  
Phone : (0033) 149353535  
Fax : (0033) 48546363