


| | | | |
|-----------|-----------------------------------|--------------------|----------------------------|
| SC | MULTIMODE SIMPLEX ADAPTOR | Packaging : 1 | F 7 2 8 7 0 3 7 0 0 |
| | ZIRCONIA ALIGNEMENT SLEEVE | Packaging : 100 | F 7 2 8 7 1 3 7 0 0 |

Original dimensions in mm [inch]

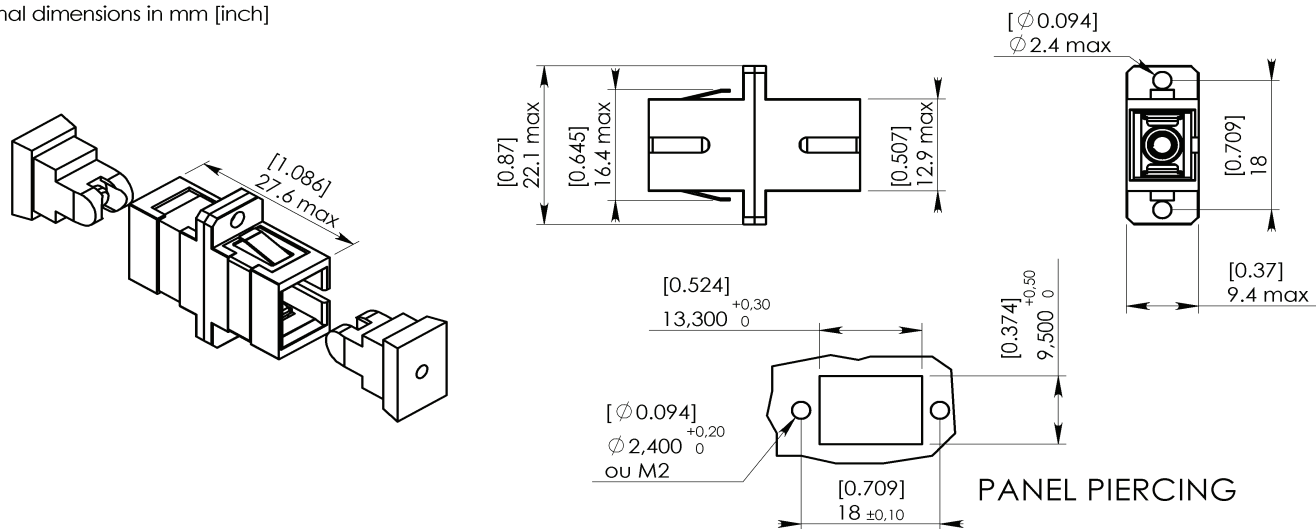

GENERAL

- Type** : IEC 61754-4 SC type. Push-pull latching system
Body color : beige
- Mounting** : snap-in (or screw - in) mounting max. panel thickness 1,6 mm
- Alignment sleeve** : zirconia

CHARACTERISTICS (Dependant on fiber or cable construction)

- Material** : Plastic moulded
Material in accordance with BELLCORE GR 326 CORE Issue 2, par. 3.3.1
Inflammability V1 (UL94)
stainless steel
- Clip**
- Optic** : Attenuation (according to IEC 1300-3-4:Substitution method, 7 type) at 1310nm : < 0,1 dB
- Mechanical** : **Durability** Bellcore 326, 200 cycles
Plug Retention > 68N
- Environmental** : **Temperature range** (storage/operating) -40°C to +85°C / -40°C to +70°C
- Salt spray** : EIA/TIA-455-16A, 35°C, 168 hr.
- Vibration test** : Bellcore 326, 10 to 50 Hz, 2 hrs./axis
- Proof test** : Bellcore 326, Straight pull : 6,8Kg load at 0°
Side pull : 3,5 Kg load at 90°

| | | | | | | |
|------------------|-------|-----------|------|------|--|--|
| CREATION | | | | | | <p>RADIALL 101, rue P. Hoffmann - Z.I. Ouest 93116 ROSNY / BOIS Cedex-France Phone : (0033) 149353535 Fax : (0033) 48546363</p> |
| N° : | | | | | | |
| PEN/EP : CAT. | | | | | | |
| Name : CAUSSE C. | | | | | | |
| Date : 23.Jul.99 | | | | | | |
| App. : | Issue | Revisions | Name | App. | | |