

Han 6HsB-M-S

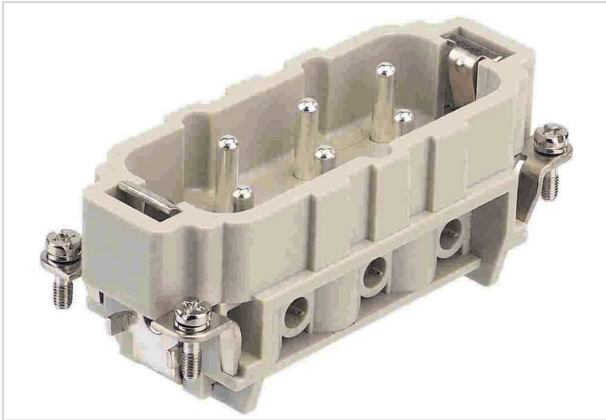


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 09 31 006 2601 |
| Specification | Han 6HsB-M-S |
| HARTING eCatalogue | https://b2b.harting.com/09310062601 |

Identification

| | |
|----------|----------------------|
| Category | Inserts |
| Series | Han [®] HsB |

Version

| | |
|----------------------|-------------------|
| Termination method | Screw termination |
| Gender | Male |
| Size | 16 B |
| With wire protection | Yes |
| Number of contacts | 6 |
| PE contact | Yes |

Technical characteristics

| | |
|-----------------------------------|---------------------------|
| Conductor cross-section | 1.5 ... 6 mm ² |
| Rated current | 35 A |
| Rated voltage conductor-earth | 400 V |
| Rated voltage conductor-conductor | 690 V |
| Rated impulse voltage | 6 kV |
| Pollution degree | 3 |
| Rated voltage acc. to UL | 600 V |
| Rated voltage acc. to CSA | 600 V |
| Insulation resistance | >10 ¹⁰ Ω |
| Contact resistance | ≤1 mΩ |
| Stripping length | 11.5 mm |



Pushing Performance
Since 1945

Technical characteristics

| | |
|----------------------|-------------------------|
| Tightening torque | 0.5 Nm Fixing screws M3 |
| | 1.2 Nm Contact screw M4 |
| | 2 Nm PE screw M5 |
| Limiting temperature | -40 ... +125 °C |
| Mating cycles | ≥500 |

Material properties

| | |
|---|--|
| Material (insert) | Polycarbonate (PC) |
| Colour (insert) | RAL 7032 (pebble grey) |
| Material (contacts) | Copper alloy |
| Surface (contacts) | Silver plated |
| Material flammability class acc. to UL 94 | V-0 |
| RoHS | compliant with exemption |
| RoHS exemptions | 6(c): Copper alloy containing up to 4 % lead by weight |
| ELV status | compliant with exemption |
| China RoHS | 50 |
| REACH Annex XVII substances | Not contained |
| REACH ANNEX XIV substances | Not contained |
| REACH SVHC substances | Yes |
| REACH SVHC substances | Lead |
| ECHA SCIP number | 5dbb3851-b94e-4e88-97a1-571845975242 |
| California Proposition 65 substances | Yes |
| California Proposition 65 substances | Lead Nickel |
| Fire protection on railway vehicles | EN 45545-2 (2020-08) |
| Requirement set with Hazard Levels | R22 (HL 1-3) R23 (HL 1-3) |

Specifications and approvals

| | |
|----------------|--|
| Specifications | IEC 60664-1 IEC 61984 |
| | UL 1977 ECBT2.E235076 CSA-C22.2 No. 182.3 ECBT8.E235076 UL 2237 PVVA2.E318390 CSA-C22.2 No. 182.3 PVVA8.E318390 |
| UL / CSA | |



Pushing Performance
Since 1945

Commercial data

| | |
|--------------------------------|---|
| Packaging size | 1 |
| Net weight | 82.42 g |
| Country of origin | Romania |
| European customs tariff number | 85366990 |
| GTIN | 5713140048874 |
| eCl@ss | 27440205 Contact insert for industrial connectors |