

## Han EE Quick-Lock module, male

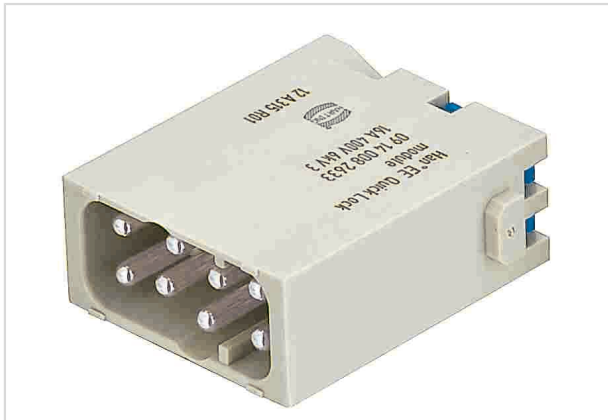


Image is for illustration purposes only. Please refer to product description.

Part number	09 14 008 2633
Specification	Han EE Quick-Lock module, male
HARTING eCatalogue	<a href="https://b2b.harting.com/09140082633">https://b2b.harting.com/09140082633</a>

### Identification

Category	Modules
Series	Han-Modular®
Type of module	Han® EE module
Size of the module	Single module

### Version

Termination method	Han-Quick Lock® termination
Gender	Male
Number of contacts	8
Details	Blue slide
Details	for stranded wire according to IEC 60228 Class 5

### Technical characteristics

Conductor cross-section	0.5 ... 2.5 mm <sup>2</sup>
Rated current	16 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	>10 <sup>10</sup> Ω
Contact resistance	≤1 mΩ
Stripping length	10 mm



Pushing Performance  
Since 1945

## Technical characteristics

Limiting temperature	-40 ... +125 °C
Mating cycles	≥500

## Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Surface (contacts)	Silver plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Yes
REACH SVHC substances	Lead
ECHA SCIP number	5dbb3851-b94e-4e88-97a1-571845975242
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead Nickel
Fire protection on railway vehicles	EN 45545-2 (2020-08)
Requirement set with Hazard Levels	R22 (HL 1-3) R23 (HL 1-3)

## Specifications and approvals

Specifications	IEC 60664-1 IEC 61984
Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E235076 UL 2237 PVVA2.E318390 CSA-C22.2 No. 182.3 PVVA8.E318390

## Commercial data

Packaging size	2
Net weight	21.4 g



**Pushing Performance**  
Since 1945

## Commercial data

Country of origin	Romania
European customs tariff number	85366990
GTIN	5713140020580
eCl@ss	27440217 Module for industrial connectors (power/signals)