
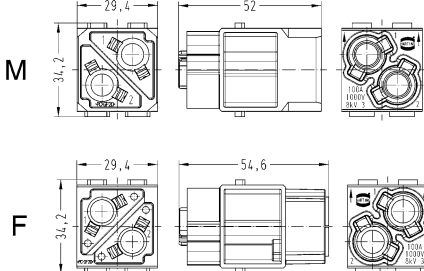

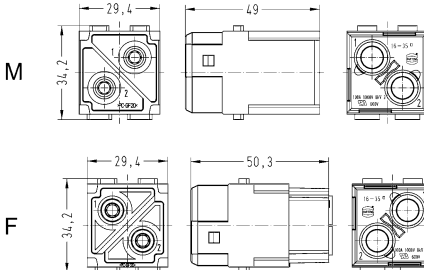

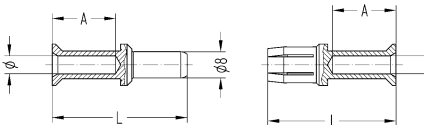


Number of contacts

# 2

100 A 1.000 V 8 kV 3

Modular

Identification	Conductor cross-section (mm <sup>2</sup> )	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han-Modular®, Han® 100 A module, Crimp termination  Please order crimp contacts separately.	10 ... 35	09 14 002 3051	09 14 002 3151																
Han-Modular®, Han® 100 A module, Axial screw termination, Contact surface: Silver plated 	10 ... 25 16 ... 35 22 ... 38	09 14 002 2653 09 14 002 2651 09 14 002 2650	09 14 002 2753 09 14 002 2751 09 14 002 2750	 <p>Stripping length 12 ... 14 mm                      Tightening torque                      6 Nm @ 10 ... 16 mm<sup>2</sup>, 7 Nm @ 25 mm<sup>2</sup>,                      8 Nm @ 35 ... 38 mm<sup>2</sup></p>															
TC 100, Crimp contact, Contact surface: Silver plated 	10 16 25 35	09 11 000 6114 09 11 000 6116 09 11 000 6125 09 11 000 6135	09 11 000 6214 09 11 000 6216 09 11 000 6225 09 11 000 6235	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>10 mm<sup>2</sup></td> <td>4.3</td> <td>19 mm</td> </tr> <tr> <td>16 mm<sup>2</sup></td> <td>5.5</td> <td>19 mm</td> </tr> <tr> <td>25 mm<sup>2</sup></td> <td>7</td> <td>19 mm</td> </tr> <tr> <td>35 mm<sup>2</sup></td> <td>8.2</td> <td>16 mm</td> </tr> </tbody> </table> <p>for stranded wire according to IEC 60 228 Class 5</p>	Conductor cross-section	∅	Stripping length	10 mm <sup>2</sup>	4.3	19 mm	16 mm <sup>2</sup>	5.5	19 mm	25 mm <sup>2</sup>	7	19 mm	35 mm <sup>2</sup>	8.2	16 mm
Conductor cross-section	∅	Stripping length																	
10 mm <sup>2</sup>	4.3	19 mm																	
16 mm <sup>2</sup>	5.5	19 mm																	
25 mm <sup>2</sup>	7	19 mm																	
35 mm <sup>2</sup>	8.2	16 mm																	