
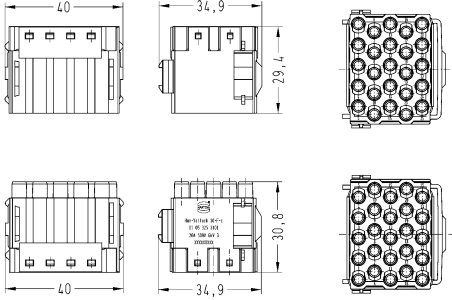





Number of contacts

# 25

16 A 500 V 6 kV 3

Yellock

Identification	Conductor cross-section (mm <sup>2</sup> )	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
<p>Han-Yellock®, Monoblock, Crimp termination</p>  <p>Please order crimp contacts separately. ATTENTION! It is not possible to use 2 monoblocks 30 in the Han-Yellock® 60 series!</p>	0.14 ... 4	11 05 325 3001	11 05 325 3101																			
<p>Han-Yellock®, Crimp contact, Contact surface: Silver plated</p> 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 3 4	11 05 000 6101 11 05 000 6102 11 05 000 6103 11 05 000 6104 11 05 000 6105 11 05 000 6106 11 05 000 6107 11 05 000 6108	11 05 000 6201 11 05 000 6202 11 05 000 6203 11 05 000 6204 11 05 000 6205 11 05 000 6206 11 05 000 6207 11 05 000 6208																			
<p>Han-Yellock®, Crimp contact, Contact surface: Gold plated</p> 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 3 4	11 05 000 6121 11 05 000 6122 11 05 000 6123 11 05 000 6124 11 05 000 6125 11 05 000 6126 11 05 000 6127 11 05 000 6128	11 05 000 6221 11 05 000 6222 11 05 000 6223 11 05 000 6224 11 05 000 6225 11 05 000 6226 11 05 000 6227 11 05 000 6228	<table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm<sup>2</sup> AWG 26-22</td> <td>6.5 mm</td> </tr> <tr> <td>0.5 mm<sup>2</sup> AWG 20</td> <td>6.5 mm</td> </tr> <tr> <td>0.75 mm<sup>2</sup> AWG 18</td> <td>6.5 mm</td> </tr> <tr> <td>1 mm<sup>2</sup> AWG 18</td> <td>6.5 mm</td> </tr> <tr> <td>1.5 mm<sup>2</sup> AWG 16</td> <td>6.5 mm</td> </tr> <tr> <td>2.5 mm<sup>2</sup> AWG 14</td> <td>6.5 mm</td> </tr> <tr> <td>3 mm<sup>2</sup> AWG 12</td> <td>6.5 mm</td> </tr> <tr> <td>4 mm<sup>2</sup> AWG 12</td> <td>6.5 mm</td> </tr> </tbody> </table> <p>Removal tool 09 99 000 0319 See chapter Han 90</p>	Conductor cross-section	Stripping length	0.14-0.37 mm <sup>2</sup> AWG 26-22	6.5 mm	0.5 mm <sup>2</sup> AWG 20	6.5 mm	0.75 mm <sup>2</sup> AWG 18	6.5 mm	1 mm <sup>2</sup> AWG 18	6.5 mm	1.5 mm <sup>2</sup> AWG 16	6.5 mm	2.5 mm <sup>2</sup> AWG 14	6.5 mm	3 mm <sup>2</sup> AWG 12	6.5 mm	4 mm <sup>2</sup> AWG 12	6.5 mm
Conductor cross-section	Stripping length																					
0.14-0.37 mm <sup>2</sup> AWG 26-22	6.5 mm																					
0.5 mm <sup>2</sup> AWG 20	6.5 mm																					
0.75 mm <sup>2</sup> AWG 18	6.5 mm																					
1 mm <sup>2</sup> AWG 18	6.5 mm																					
1.5 mm <sup>2</sup> AWG 16	6.5 mm																					
2.5 mm <sup>2</sup> AWG 14	6.5 mm																					
3 mm <sup>2</sup> AWG 12	6.5 mm																					
4 mm <sup>2</sup> AWG 12	6.5 mm																					