# Product data sheet
## Characteristics

# XVC4M35S
## Harmony XVC, Monolithic precabled tower light, plastic, red orange green, Ø40, tube mounting, steady or flashing, buzzer, IP23, 100...240 V AC



### Main

| | |
|---|---|
| Range of Product | Harmony XVC4 |
| Product or Component Type | Complete pre-wired monolithic tower light |
| Beacon or indicator bank unit type | 3 illuminated units |
| Sound signalling | Buzzer |
| Mounting diameter | 1.57 in (40 mm) |
| Component name | XVC |
| Device short name | XVC |
| Light source | LED steady or flashing red<br>LED steady or flashing orange<br>LED steady or flashing green |
| Supply circuit type | AC |
| Noise level | 70…85 dB continuous or intermittent tone)1 m |

### Complementary

| | |
|---|---|
| Material | Polycarbonate illuminated unit<br>ABS (acrylonitrile butadiene-styrene) base unit<br>PBT + ABS (UL94-V0) top cover<br>SGP (chromium-plated) support tube |
| Mounting Location | On support tube, 17 mm |
| Product mounting | On support tube, 17 mm |
| [Us] rated supply voltage | 100...240 V |
| [Us] rated supply voltage | 100...240 V |
| Cable cross section | 0.00 In² (0.33 mm²)<br>0.00 in² (0.83 mm²) |
| AWG gauge | AWG 22<br>AWG 18 |
| Cable length | 17.72 in (450 mm) |
| Marking | CE |
| [Uimp] rated impulse withstand voltage | 4 kV |
| Current Consumption | 80 mA |
| Fundamental frequency | 2.23 kHz |
| Flashing frequency | 1 Hz |
| Net Weight | 1.76 lb(US) (0.8 kg) |
| Height | 25.09 in (637.2 mm) |

### Environment

| | |
|---|---|
| Standards | EN/IEC 60947-1<br>EN/IEC 60947-5-1 |
| Product Certifications | UL |
| Protective treatment | TC |
| Ambient Air Temperature for Storage | -31…158 °F (-35…70 °C) |
| Ambient air temperature for operation | 14…122 °F (-10…50 °C) |
| Electrical shock protection class | Class I EN/IEC 61140 |
| Overvoltage category | Class I EN/IEC 61140 |
| IP degree of protection | IP23 vertical surface installation EN/IEC 60529 |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Ordering and shipping details

| | |
|---|---|
| Category | 22617 - XVC TOWER LIGHTS |
| Discount Schedule | XV |
| GTIN | 3606480072871 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 2.27 lb(US) (1.028 kg) |
| Returnability | No |
| Country of origin | ID |

## Packing Units

| | |
|---|---|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 29.72 in (75.5 cm) |
| Package 1 width | 2.64 in (6.7 cm) |
| Package 1 Length | 2.64 in (6.7 cm) |
| Unit Type of Package 2 | BB1 |
| Number of Units in Package 2 | 10 |
| Package 2 Weight | 25.20 lb(US) (11.429 kg) |
| Package 2 Height | 5.51 in (14 cm) |
| Package 2 width | 13.66 in (34.7 cm) |
| Package 2 Length | 29.72 in (75.5 cm) |
| Unit Type of Package 3 | P06 |
| Number of Units in Package 3 | 30 |
| Package 3 Weight | 94.33 lb(US) (42.787 kg) |
| Package 3 Height | 30.31 in (77 cm) |
| Package 3 width | 31.50 in (80 cm) |
| Package 3 Length | 23.62 in (60 cm) |

## Offer Sustainability

| | |
|---|---|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |


## Contractual warranty

| | |
|---|---|
| Warranty | 18 months |

## Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

### Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b1 dimension.

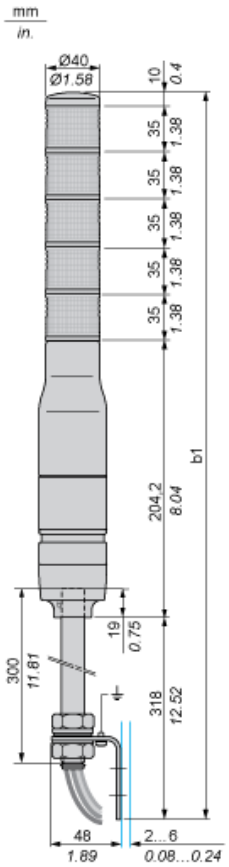


| No. of illuminated units | b1 Without buzzer (mm) | b1 Without buzzer (in.) |
|---|---|---|
| 1 stage | 567.20 | 22.33 |
| 2 stages | 602.20 | 23.71 |
| 3 stages | 637.20 | 25.09 |
| 4 stages | 672.20 | 26.46 |
| 5 stages | 707.20 | 27.84 |

## Pre-assembled and Pre-wired Tower Light

### Support Tube Mounting

