KombiSIGN 40 / ClassicLOOK

Terminal element IO-Link 24VDC BK



Part No.:	**631.800.55**
Series:	**KombiSIGN 40**

MECHANICAL DATA	
Height	59 mm
Diameter	40 mm
Materials	PC
Housing colour	Black
Protection category	IP66 IP69K
Connection	IO-LINK Push-in terminal
cross-sectional area minimum	0,25mm² / 24AWG
cross-sectional area maximum	1,50mm² / 16AWG
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	51 g
Product weight	35 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	6 mA
Rated inrush current	400 mA
Protection class	Protection class 3
Pollution degree	3
Request to external PSU	SELV/PELV
connectivity	IO-Link

APPROVAL DATA	
Conforms with CE	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	No
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / ClassicLOOK

Terminal element IO-Link 24VDC BK

Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No
MTTF-value [years]	1200

DRAWING

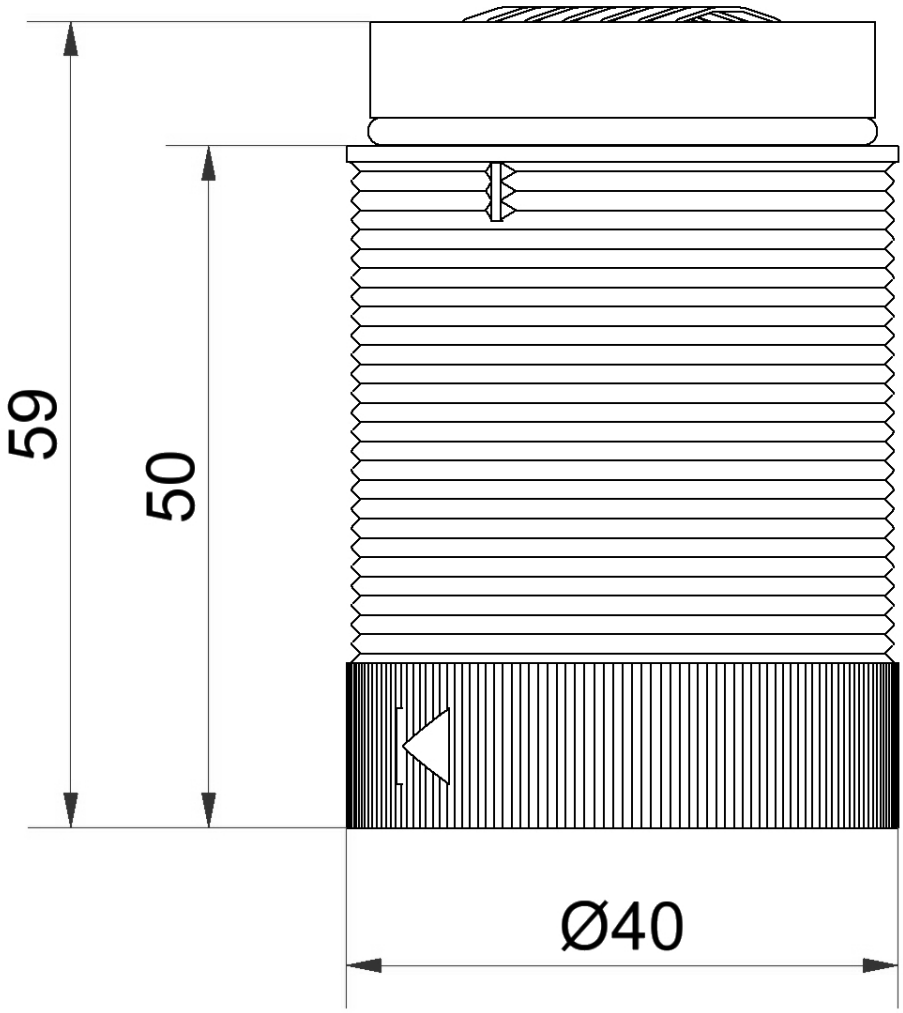

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.