Modular Signal Towers / KombiSIGN 72

Siren element contin/altern. 24VAC/DC GY



Part No.:	**645.770.75**
Series:	**KombiSIGN 72**

MECHANICAL DATA	
Height	54 mm
Diameter	70 mm
Materials	PC
Housing colour	Grey
Protection category	IP65
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	89 g
Product weight	74 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	40 mA
Rated inrush current	100 mA
Protection class	Protection class 2
Pollution degree	3

ACOUSTIC DATA	
Volume (max) at 1m distance	105,0 dB (A)
Acoustic signal image	Alternating tone Continuous tone
Number of tones	2 tone
Volume adjustable	Switch
Volume adjustment range	ca. 95 / 105,0 dB (A)
Audio frequency	3000 Hz
Acoustic service life	5,000 h minimum

APPROVAL DATA	
Conforms with CE	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Modular Signal Towers / KombiSIGN 72

Siren element contin/altern. 24VAC/DC GY

Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No
MTTF-value [years]	2677

DRAWING

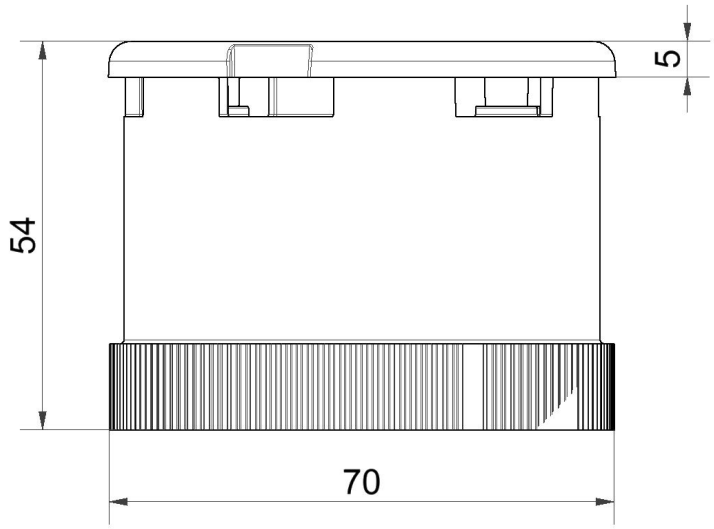

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.