
MS115C series Ø115mm Flashing-only LED Signal light


LED High brightness · IP 65 · UL · EAC · RoHS

Standard Flashing - 80 times per minute
Emergency Flashing - 240 times per minute





Connection diagram

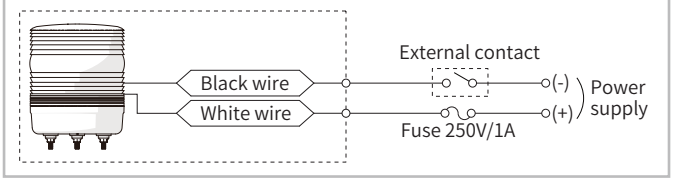


Power consumption

(Measured value by RMS ±10%)


Voltage	12~24VDC
R/Y/G/B/C	0.9A

Function setting

Flashing control

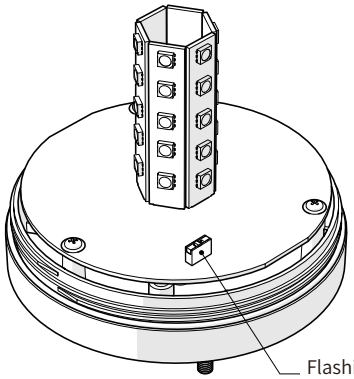

Flashing rate control

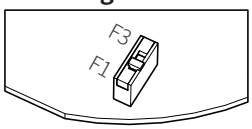

F1: 80±10 times per minute
F3: 240±10 times per minute
(when using emergency signal)

As a Flashing-only alarm light, it uses high luminance LED, which emits strobe light having excellent visibility in a long distance. Its visibility is superior in quality by using the specially developed dispersing lens, and it is suitable for tow truck and construction equipment.

- ✓ It is suitable for processing machinery with semi permanent life span of the light
- ✓ It needs less room with 20mm low body
- ✓ It is certified by UL mark
- ✓ It spreads the bright light widely through a prism-cut lens
- ✓ There are two patterns of Flashing function selected by switch
- ✓ This product complies with RoHS guideline

Model configuration

MS115C - F 00 - Y
① ②

① Voltage

00	12~24VDC

② Lens color

R	Red	B	Blue
Y	Yellow	C	Clear
G	Green		