Andon Light


Ready to Use Andon Lights
With Pole Mounted Control Box

- 56mm diameter LED Andon lights
- Pre-wired suitable for multiple applications
- 1-5 stacks, or 1-4 stacks with buzzer
- 80dB buzzer or adjustable 10-100dB buzzer
- Wall mountable bracket
- 57" pole & 4.3ft power cord



Dimensions

unit: mm

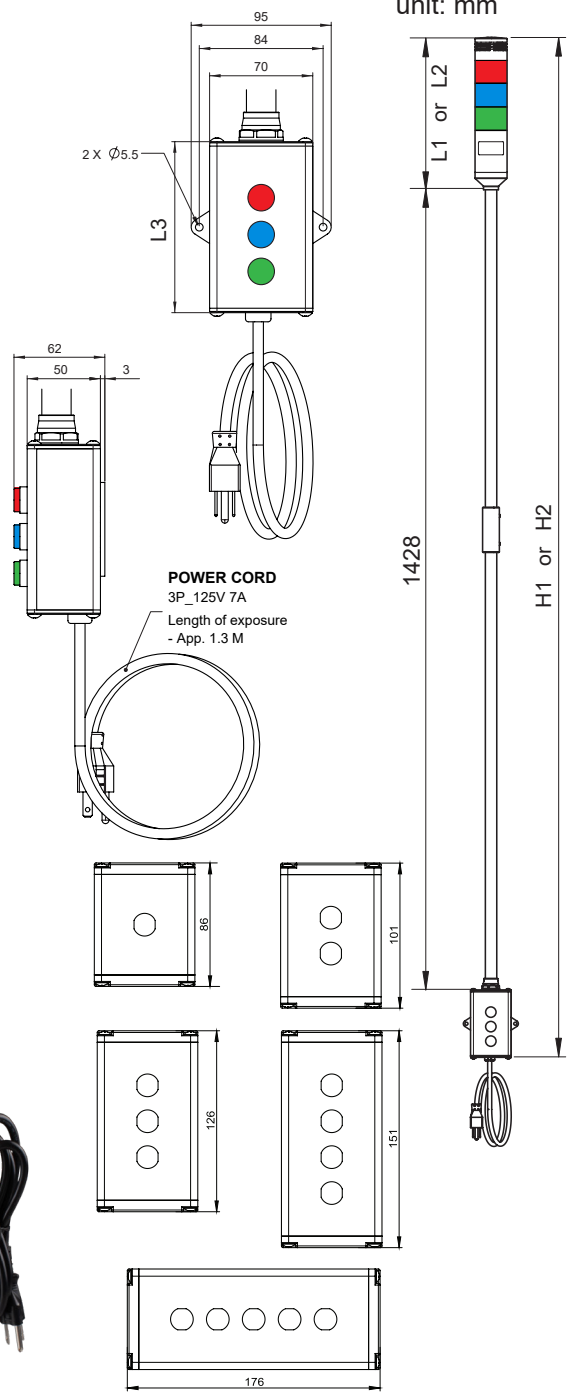

Stacks	L1 (no buzzer)	L2 (with buzzer)	L3	H1 (no buzzer)	H2 (with buzzer)
1	159	184	86	1673	1698
2	199	224	101	1728	1753
3	239	264	126	1793	1818
4	279	304	151	1858	1883
5	319	N/A	176	1923	N/A

Ordering Information

PTE-AP Z - 3 FF - RBG - AM3
① ② ③

① **Buzzer Type** (optional)	**no mark**	No Buzzer
	Z	Fixed 80dB Buzzer
	H	Adjustable 10~100dB Buzzer
② **Number of Stacks**	**1**	1 Light
	2	2 Lights
	3	3 Lights
	4	4 Lights
	5*	5 Lights
③** **LED Colors (Top to Bottom)**	**R**	Red
	Y	Yellow
	G	Green
	RY	Red, Yellow
	RG	Red, Green
	RYG	Red, Yellow, Green
	RBG	Red, Blue, Green
	RYGB	Red, Yellow, Green, Blue
	RYGBC*	Red, Yellow, Green, Blue, Clear

* Buzzer is not available for 5 light stack models
** The order and function(steady/flashing) of light stacks can be customized

Specifications

Light/Function	Steady or Flashing
Power Supply	110V AC 50/60 Hz (±10%)
LED Color	Red, Yellow, Green, Blue & Clear
Lens Diameter	56 mm (2.2 inch)
Switching Options	Pushbutton
Flash Rate	80 times/ minute
Vibration	0.75mm at 10~55Hz
Ambient Temperature	-15°C~40°C
Storage Temperature	-20°C ~ 70°C
Ambient Humidity	45~85% RH
Pole length	57"
Power Cord	3 prong 4.3ft installed

LED Modules

Color	Red	Yellow	Green	Blue	Clear
Current Consumption	17mA	17mA	22mA	22mA	22mA

Buzzer Modules

Type	Z	H
Sound Volume	Fixed	Adjustable
Sound Level	80±5dB	10 ~ 100±5dB
Current Consumption	30mA	150mA