


Microsemi AcuEdge™ Technology

HD Voice Audio for IP Camera

New High-performance Audio Processors Enable the Streamlined Development of IP Camera for HD Voice Capabilities

Designed for High Definition (HD) Voice 2 way audio in IP Camera, Microsemi's new audio processors ZL38050 and ZL38051 feature the company's innovative AcuEdge™ acoustic technology, which is a

set of highly-complex and integrated algorithms that allow the user to extract intelligible information from the audio environment from which they are communicating.

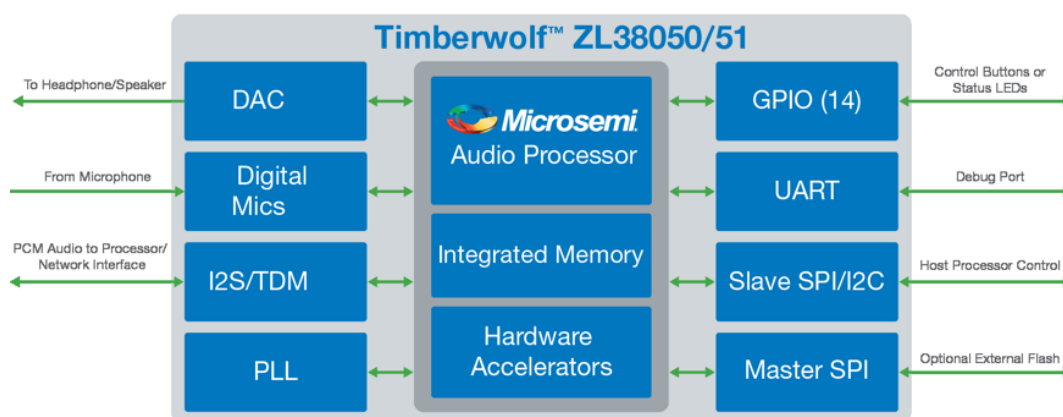

ZL38050/51 Block Diagram

Audio Processor for IP Camera

Microsemi's AcuEdge Technology integrates industry leading features and dedicated firmware to deliver high-quality hands-free voice performance while reducing system design complexity.

In complex noisy environments, Microsemi's AcuEdge Technology cancels echo and reduces ambient noise. While the most solutions deliver only half-duplex operation, Microsemi's proprietary algorithm is able to converge and track changes in the echo path to support full-duplex operation.

DVR, NVR, or security camera users have difficulty trying to monitor a large number of video feeds for certain incidents, crimes, or events. By adding audio to the surveillance camera, it will enable security personal at the control room to make judgment calls on security concerns. Microsemi AcuEdge Technology will provide audio enhancement to allow more accurate monitoring. The ZL38051 audio processor adds audio enhancement functions such as far field microphone, detection of sound location, and beam forming capabilities.

Getting Started

Use the following resources to explore:

Microsemi AcuEdge™ Technology

- ZL38050 IP Camera Audio Processor
- ZL38051 Advanced IP Camera Audio Processor

MiTuner™ Automatic Tuning Kit


- MiTuner™ Information
- MiTuner™ GUI Software Guide
- ZLS38508 MiTuner™ GUI

Microsemi AcuEdge™ Technology

HD Voice Audio for IP Camera


Features and Benefits

- Full duplex AEC (Narrowband and Wideband)
- Mid field audio pick up to 3 meters (ZL38050)
- Far field audio pick up to 10 meters (ZL38051)
- Sound location estimation (ZL38051)
- Beam forming for effective noise attenuation (ZL38051)
- Long tail echo cancellation (up to 256 ms)
- Advanced Noise Reduction to reduces background noise from the near-end speech signal
- 16/22 band equalizer
- Howling cancellation: prevents oscillation in echo canceller audio path

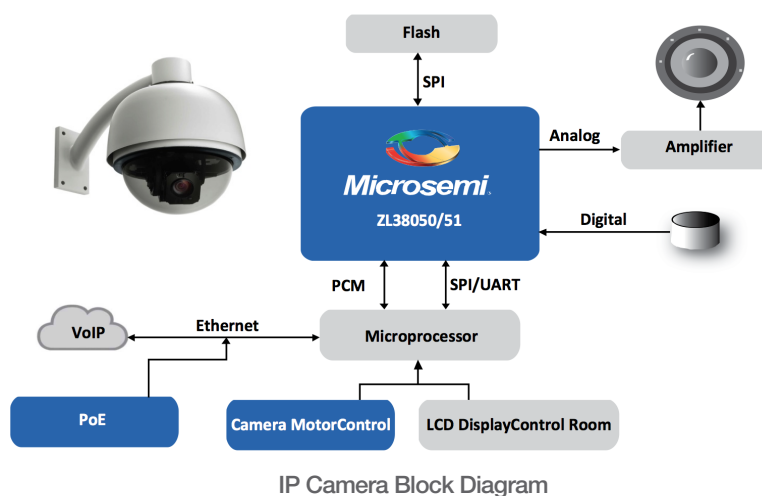

Microsemi Auto Tuning Tool (ZLE38475)

Microsemi's MiTuner™ Kit eases the system tuning complexity and speed up design cycle for quick development. MiTuner™ kit provides hardware, software and support for the automatic tuning of TIMBERWOLF family of audio processors.

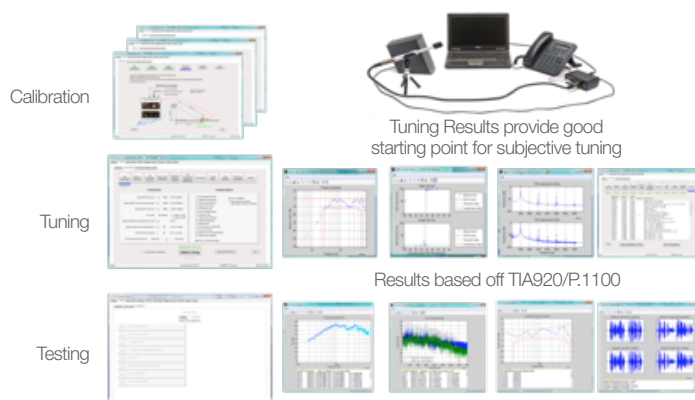

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.



Microsemi Corporate Headquarters
 One Enterprise, Aliso Viejo, CA 92656 USA
 Within the USA: +1 (800) 713-4113
 Outside the USA: +1 (949) 380-6100
 Sales: +1 (949) 380-6136
 Fax: +1 (949) 215-4996
 email: sales.support@microsemi.com
 www.microsemi.com

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense & security, aerospace and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; security technologies and scalable anti-tamper products; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif., and has approximately 3,400 employees globally. Learn more at www.microsemi.com.

©2015 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

MC-2-15