

UM-DELTA V/D/SI/BFI/TP


Order No.: 5603257



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=5603257>

Fuse module with shield connection terminals and fuse failure display (for digital cards of the Delta V control system)



Commercial data	
GTIN (EAN)	
Note	Made-to-order
sales group	I630
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 200 (IF-2009)

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General data	
Nominal voltage U_N	24 V DC
Max. current carrying capacity per branch	50 mA (in as-supplied state, with one 50 mAF fuse, max. 1 A permitted)
Number of positions	16
Width	61 mm
Height	126 mm
Depth	71 mm

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	500 V (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103

Connection data

Connection 1	Field level
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	7 mm
Screw thread	M3
Connection 2	Control system level
Type of connection	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	16

Certificates / Approvals




Certification

CUL, UL

Diagrams/Drawings

Circuit diagram

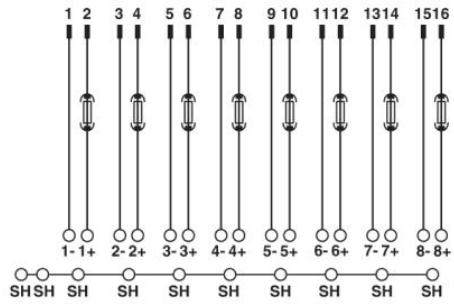

Connection scheme UM-DELTA V/D/SI/BFI/TP

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;