


**RS ELCO
38 WAY L.H. VARELCO I/F**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

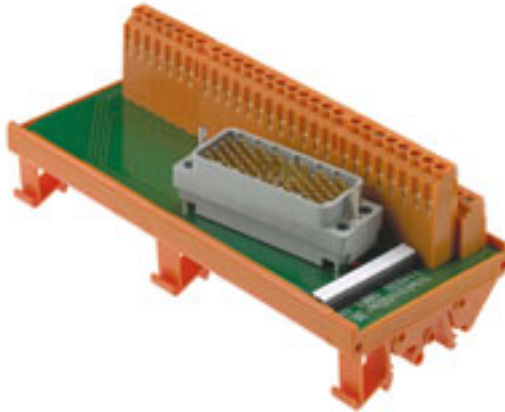

ELCO contacts inserts are used in electrical power plants, refineries and a variety of process applications – wherever stable and reliable signal transmission is required. The ELCO connector features both a reliable connection system and a high signal capacity.

The line of RS ELCO interfaces and pre-assembled PAC ELCO cables is a specially designed solution for these requirements.

General ordering data

Type	38 WAY L.H. VARELCO I/F
Order No.	9800510000
GTIN (EAN)	4008190561987
Qty.	1 pc(s).

Data sheet

**RS ELCO
38 WAY L.H. VARELCO I/F**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

Length	115 mm	Width	70 mm
Height	76 mm	Net weight	212 g

Temperatures

Operating temperature	Storage temperature
-----------------------	---------------------

Connection Data

Connection on control side	ELCO type 8016	Number of poles (control side)	38-pole plug
Polarity hardware codification	1	Connector alignment	Left
Connection (field side)	LP2N 5.08mm		

Rating data

Rated voltage	125V AC / 150V DC	Rated current per connection	1.5 A
---------------	-------------------	------------------------------	-------

Connection field

Type of connection	Screw connection	Clamping range, min.	0.13 mm ²
Clamping range, max.	6 mm ²	Solid, min. H05(07) V-U	0.5 mm ²
Solid, max. H05(07) V-U	6 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Flexible, max. H05(07) V-K	4 mm ²	Flexible with sleeve, max.	2.5 mm ²
Flexible with sleeve, min.	0.5 mm ²	Sleeve with plastic collar, max.	2.5 mm ²
Min. wire cross-section, AWG [field]	AWG 26	Max. wire cross-section, AWG [field]	AWG 12
Tightening torque, min.	0.5 Nm	Tightening torque, max.	0.6 Nm
Stripping length	6 mm		

Classifications

ETIM 3.0	EC001423	eClass 6.2	27-24-22-08
eClass 7.1	27-24-22-08		

Approvals

Approvals



ROHS	Conform
------	---------