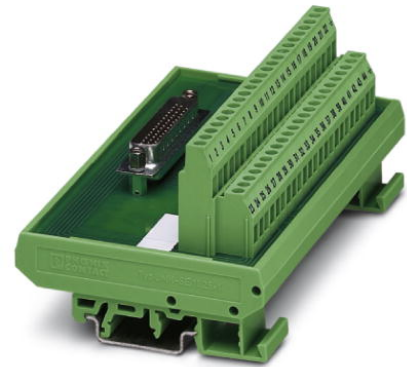



FLKM HDSUB-26/M

Order No.: 5528354

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=5528354>

VARIOFACE module, with screw connection and high density D-Subminiature male connector, for mounting on NS 32 or NS 35/7.5, no. of pos.: 26, width: 79 mm

Commercial data

| | |
|--------------------------|---|
| GTIN (EAN) |  |
| sales group | I011 |
| Pack | 1 pcs. |
| Customs tariff | 85369010 |
| Catalog page information | Page 253 (IF-2007) |

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data


| | |
|---|------------------|
| Nominal voltage U_N | 125 V |
| Max. current carrying capacity per branch | 1 A |
| Number of positions | 26 |
| Width | 79 mm |
| Height | 77 mm |
| Depth | 58 mm |
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Mounting position | Any |

Connection data


| | |
|--|---------------------|
| Connection 1 | PCB connection |
| Connection in acc. with standard | IEC / EN |
| Type of connection | Screw connection |
| Number of positions | 26 |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max. | 12 |
| Stripping length | 8 mm |
| Screw thread | M3 |
| Connection 2 | D-SUB connection |
| Type of connection | Pluggable |

Diagrams/Drawings

Circuit diagram

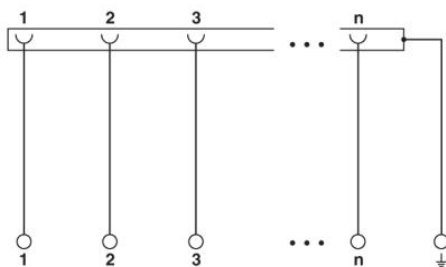

Schematic diagram

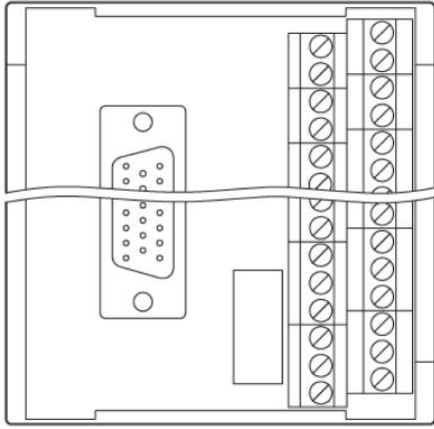

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;