


# Data sheet

## 1257.3 UEG C 64-M

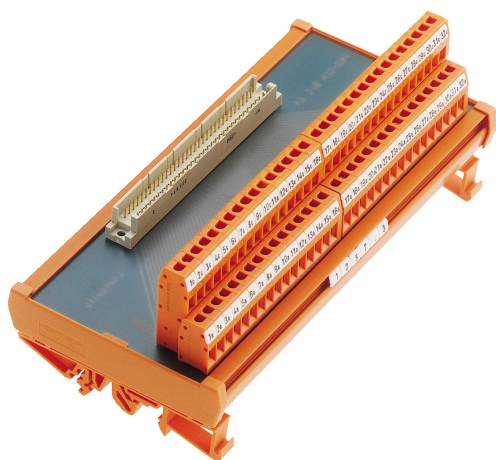

Interface module for ribbon cables, Screw connection and ribbon cable connector, Mounting type: Mounting rail TS 35, No. of poles: 64

### Business data

Article number	<u>1257.3</u>
Article name	UEG C 64-M
GTIN (EAN)	4044211034610
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	287 g
Weight per piece (including packaging)	363 g
Unit of weight	G
Customs number	85369010
Country of origin	NL
Product description	Interface module

# Data sheet

## 1257.3 UEG C 64-M

---

### Technical data

#### Dimensions

Length	87 mm
Width	180 mm
Height TS 35/7.5	72 mm

#### Ratings

Overvoltage category	III
Contamination degree	2

#### Connection data

Connection principle	Screw connection
Number of connections	1
No. of poles	64
Wire cross-section single core (rigid), min.	0.08 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules,min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules,max.	2.5 mm <sup>2</sup>
Stripping length	7 mm
Torque	0.6 Nm

#### Input data

Max. operating voltage AC/DC	125 V
Current load per channel, max.	1,5 A

#### Materials

Working temperature, min.	-20 °C
Working temperature, max.	+60 °C

#### Further technical data

Mounting type	TS35
Connector type	Shape C, DIN 41612, Socket block a + c

#### Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2022-06-10
REACH Candidate Substance Note	No
RoHS Conform	yes

---

### Approvals

---

#### Standards and regulations

---

Standards / specifications



DIN VDE 0110 EN 50178

---

# Data sheet

## 1257.3 UEG C 64-M

### Media

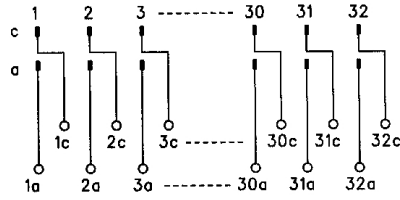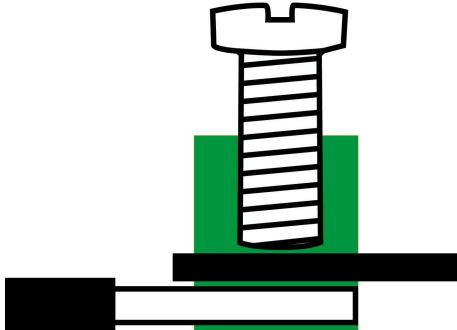

---

### Accessories

---