




Field Interface Modules



Passive - 2 wire
16 Channel
Output
GE Fanuc

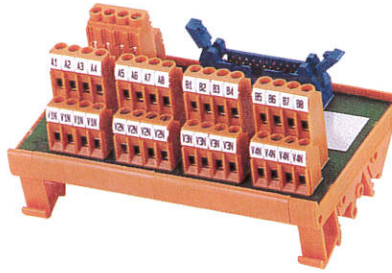

Passive - 2 wire
16 Channel
Output
GE Fanuc

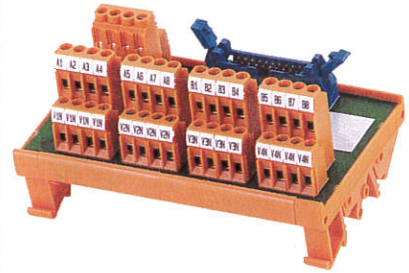

Technical Data

| | | |
|-----------------------|--|--|
| Type | RS PLC 16PT (4x4) | RS PLC 16PT (4x4) |
| Part number | 998132 120 VAC IC697MDL340 998142 24-48 VDC IC697MDL740 | 998074 IC693MDL940 |
| Rated voltage | See Above | 24-120 VAC/DC |
| Rated current | 2.0 A per channel / 4.0 A per group of 4 | 3.0 A per channel / 3.0 A per group of 4 / 12.0 A per module |
| Cable connection | (1) 1 x 40 pin IDC | (1) 1 x 40 pin IDC |
| LED Indicators | No | No |
| Operating Temperature | 0°C...+50°C | 0°C...+50°C |
| Storage Temperature | -20°C...+60°C | -20°C...+60°C |
| Dimensions LxWxH mm | 113 x 70 x 59 | 113 x 70 x 59 |
| Terminal Wire Size | #26...14 AWG | #26...14 AWG |
| Terminal Type | Screw Clamp | Screw Clamp |
| Approvals | | |

Wiring Schematics

