




# Field Interface Modules



**Passive - 2 wire  
16 Channel  
Relay Output Fused\* w/LED,  
MOV, and Circuit Breaker  
Allen-Bradley**

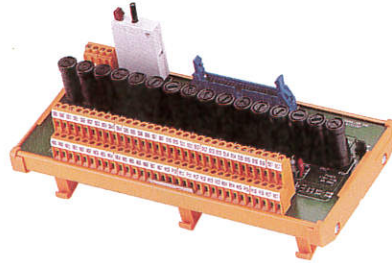

**Passive - 2 wire  
16 Channel  
Relay Output Fused\* w/LED,  
MOV, and Circuit Breaker  
Allen-Bradley**

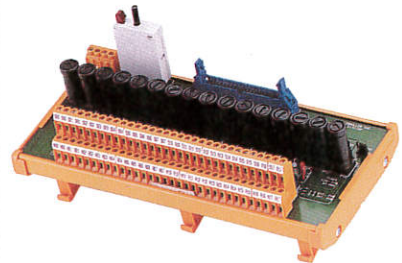

## Technical Data

Type	RS PLC DO W/F, W/LD, W/MOV FGI	RS PLC RO W/F, W/LD, W/MOV
Part number	998371 1771-OD16	998214 24-250 VAC 1771-OW16 24-150 VDC 1771-OW16
Rated voltage	120 VAC	See Above
Rated current	2.0 A per channel / 12.0 A per module	2.0 A per channel / 12.0 A per module
Cable connection	(1) 1 x 40 pin IDC	(1) 1 x 40 pin IDC
LED Indicators	No	No
Operating Temperature	0°C...+50°C	0°C...+50°C
Storage Temperature	-20°C...+60°C	-20°C...+60°C
Dimensions LxWxH mm	182 x 109 x 69	218 x 109 x 69
Terminal Wire Size	#26...14 AWG	#26...14 AWG
Terminal Type	Screw Clamp	Screw Clamp
Approvals		

## Wiring Schematics

