


FEATURES

7ns Propagation Delay
Complementary TTL Outputs
85dB CMRR
+5V, -6V Supply Voltages

APPLICATIONS

High-Speed Triggers
High-Speed Line Receivers
Peak Detectors
Threshold Detectors

AD9686 FUNCTIONAL BLOCK DIAGRAM

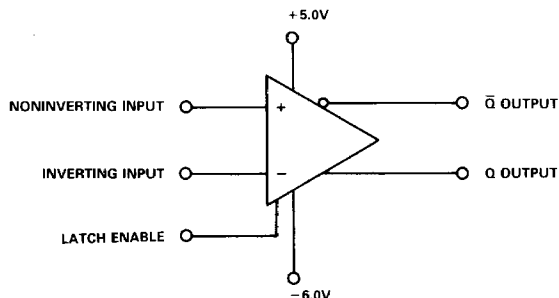

3

GENERAL DESCRIPTION

The AD9686 is a high-speed voltage comparator with complementary TTL outputs. The AD9686 is manufactured in a high-performance bipolar process which provides an excellent match between high-speed ac switching and dc accuracy. The AD9686 operates with a propagation delay of only 7ns.

The AD9686 incorporates a Latch Enable control line providing operation in either a sample-hold mode or a track-hold mode. The Latch Enable setup times are less than 2ns which allows very high-speed voltage sampling.

The precision differential input stage has less than 2mV of offset voltage and requires an input bias current of only 4 μ A. This combined with the 85dB common-mode rejection ratio, makes the AD9686 especially well suited for high-speed analog signal processing.

The AD9686 is offered as both an industrial temperature range device, -25°C to +85°C, and as an extended temperature range device, -55°C to +125°C. Both versions are available packaged in a TO-100 metal can and in a ceramic DIP. The extended temperature range device is also available in a ceramic LCC package.

ORDERING INFORMATION

Device	Temperature Range	Description	Package Options*
AD9686BH	-25°C to +85°C	10-Pin Can, Industrial	H-10A
AD9686BQ	-25°C to +85°C	16-Pin DIP, Industrial	Q-16
AD9686TE	-55°C to +125°C	20-Pin LCC, Extended Temperature	E-20A
AD9686TH	-55°C to +125°C	10-Pin Can, Extended Temperature	H-10A
AD9686TQ	-55°C to +125°C	16-Pin DIP, Extended Temperature	Q-16

*See Section 16 for package outline information.

SPECIFICATIONS

ABSOLUTE MAXIMUM RATINGS¹

Positive Supply Voltage (+V _S)	+7V	Power Dissipation	600mW
Negative Supply Voltage (-V _S)	-7V	Operating Temperature Range ³	
Input Voltage Range ²	±5V	AD9686BH/BQ	-25°C to +85°C
Differential Input Voltage	6.0V	AD9686TE/TH/TQ	-55°C to +125°C
Latch Enable Voltage	0V to +V _S	Storage Temperature Range	-65°C to +150°C
Output Current	Sourcing	4mA	Junction Temperature	+175°C
	Sinking	14mA	Lead Soldering Temperature (10sec)	+300°C

ELECTRICAL CHARACTERISTICS (Supply Voltages = -6.0V and +5.0V, unless otherwise stated)

Parameter	Mil ⁴ Sub Group	Temp	Industrial -25°C to +85°C AD9686BH/BQ			Military -55°C to +125°C AD9686TE/TH/TQ			Units
			Min	Typ	Max	Min	Typ	Max	
INPUT CHARACTERISTICS									
Input Offset Voltage ⁵	1	+25°C		1.0	2.0		1.0	2.0	mV
	2, 3	Full			3.0			3.0	mV
Input Offset Drift		Full		10			10		μV/°C
Input Bias Current	1	+25°C		4	10		4	10	μA
	2, 3	Full			13			13	μA
Input Offset Current	1	+25°C		0.4	1.0		0.4	1.0	μA
	2, 3	Full			1.3			1.3	μA
Input Resistance		+25°C		100			100		kΩ
Input Capacitance		+25°C		3			3		pF
Input Voltage Range	1, 2, 3	Full	-3.3		+4.5	-3.3		+4.5	V
Common-Mode Rejection Ratio		Full		85			85		dB
ENABLE INPUT									
Logic "1" Voltage	1, 2, 3	Full			2.0			2.0	V
Logic "0" Voltage	1, 2, 3	Full	0.8			0.8			V
Logic "1" Current	1, 2, 3	Full			100			100	μA
Logic "0" Current	1, 2, 3	Full			100			100	μA
DIGITAL OUTPUTS									
Logic "1" Voltage (Source 1mA)	1, 2, 3	Full	2.4	3.5		2.4	3.5		V
Logic "0" Voltage (Sink 10mA)	1, 2, 3	Full		0.3	0.4		0.3	0.4	V
SWITCHING PERFORMANCE									
Propagation Delays									
Input to Output HIGH		+25°C		7			7		ns
Input to Output LOW		+25°C		7			7		ns
Latch Enable to Output HIGH		+25°C		7			7		ns
Latch Enable to Output LOW		+25°C		7			7		ns
Delta Delay Between Outputs		+25°C		2			2		ns
Latch Enable									
Minimum Pulse Width	12	+25°C		2	3		2	3	ns
Minimum Setup Time	12	+25°C		1	2		1	2	ns
Minimum Hold Time	12	+25°C		1	2		1	2	ns
POWER SUPPLY⁶									
Positive Supply Current (+5.0V)	1, 2, 3	Full		30	35		30	35	mA
Negative Supply Current (-6.0V)	1, 2, 3	Full		26	32		26	32	mA
Power Supply Rejection Ratio ⁷		Full		65			65		dB

NOTES

¹Absolute maximum ratings are limiting values, to be applied individually, and beyond which serviceability of the circuit may be impaired. Functional operation under any of these conditions is not necessarily implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

²Under no circumstances should the input voltages exceed the supply voltages.

³Typical thermal impedance . . .

AD9686 Metal Can	θ _{JA} = 172°C/W; θ _{JC} = 52°C/W
AD9686 Ceramic	θ _{JA} = 115°C/W; θ _{JC} = 57°C/W
AD9686 LCC	θ _{JA} = 102°C/W; θ _{JC} = 45°C/W

⁴Military subgroups apply to military qualified devices only.

⁵R_S = 100Ω.

⁶Supply voltage should remain stable within ±5% for normal operation.

⁷Measured at ±5% of +V_S and -V_S.

Specifications subject to change without notice.

EXPLANATION OF GROUP A MILITARY SUBGROUPS

Subgroup 1 – Static tests at +25°C.	Subgroup 5 – Dynamic tests at max rated oper. temp.	Subgroup 9 – Switching tests at +25°C.
Subgroup 2 – Static tests at max rated oper. temp.	Subgroup 6 – Dynamic tests at min rated oper. temp.	Subgroup 10 – Switching tests at max rated oper. temp.
Subgroup 3 – Static tests at min rated oper. temp.	Subgroup 7 – Functional tests at +25°C.	Subgroup 11 – Switching tests at min rated oper. temp.
Subgroup 4 – Dynamic tests at +25°C.	Subgroup 8 – Functional tests at max and min rated oper. temp.	Subgroup 12 – Periodically sample tested.

FUNCTIONAL DESCRIPTION

PIN NAME

+V_S
NONINVERTING INPUT

INVERTING INPUT

-V_S
LATCH ENABLE

GROUND
Q OUTPUT

\bar{Q} OUTPUT


NC

DESCRIPTION


- Positive supply terminal, nominally +5.0V.
- Noninverting analog input of the differential input stage. The NONINVERTING INPUT must be driven in conjunction with the INVERTING INPUT.
- Inverting analog input of the differential input stage. The INVERTING INPUT must be driven in conjunction with the NONINVERTING INPUT.
- Negative supply terminal, nominally -6.0V.
- In the "compare" mode (logic LOW), the output will track changes at the input of the comparator. In the "latch" mode (logic HIGH), the output will reflect the input state just prior to the comparator being placed in the "latch" mode.
- Analog and digital ground.
- One of two complementary outputs. Q will be at logic HIGH if the analog voltage at the NONINVERTING INPUT is greater than the analog voltage at the INVERTING INPUT (provided the comparator is in the "compare" mode). See LATCH ENABLE for additional information.
- One of two complementary outputs. \bar{Q} will be at logic LOW if the analog voltage at the NONINVERTING INPUT is greater than the analog voltage at the INVERTING INPUT (provided the comparator is in the "compare" mode). See LATCH ENABLE for additional information.
- "NO CONNECT" pins are not internally connected.

3


PINOUT CONFIGURATIONS



TO-100
10-Pin Can




16-Pin DIP

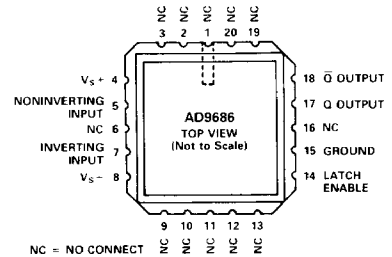


20-Pin LCC

SYSTEM TIMING DIAGRAM

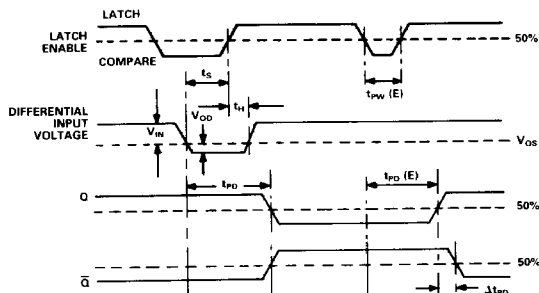

- t_s – Minimum Setup Time
- t_h – Minimum Hold Time
- t_{PD} – Input to Output Delay
- $t_{PD}(E)$ – LATCH ENABLE to Output Delay
- $t_{PW}(E)$ – Minimum LATCH ENABLE Pulse Width
- V_{OS} – Input Offset Voltage
- V_{OD} – Overdrive Voltage
- Δt_{PD} – Delta Delay Between Complementary Outputs

DIE LAYOUT AND MECHANICAL INFORMATION

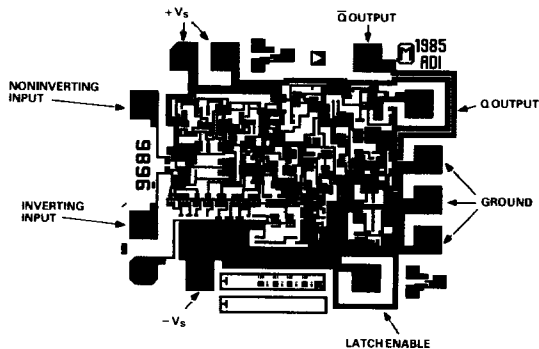

Die Dimensions	59 × 50 × 18 (max) mils
Pad Dimensions	4 × 4 mils
Metalization	Aluminum
Backing	None
Substrate Potential	-Vs
Passivation	Oxynitride
Die Attach	Gold Eutectic
Bond Wire	1.25 mil, Aluminum; Ultrasonic Bonding or 1 mil, Gold; Gold Ball Bonding