



Manage this device with Digi Remote Manager


DIGI CONNECTCORE 8M MINI

Embedded system-on-module based on the NXP i.MX 8M Mini processor with built-in security; designed for longevity and scalability in industrial IoT applications

Digi ConnectCore® 8M Mini, based on the NXP® i.MX 8M Mini application processor, is a secure integrated system-on-module (SOM) platform. The Mini is designed for a wide range of industrial, medical, agricultural and transportation applications, including Internet of Things (IoT), human-machine interface (HMI), equipment monitoring, audio/voice, graphics/video, edge computing and machine learning.

Digi ConnectCore 8M Mini features four power-efficient Arm® Cortex®-A53 cores, one Cortex-M4 core, and the Digi Microcontroller Assist Cortex-M0, which allow it to minimize power consumption while maintaining a high standard of performance. With a 10+ year product lifecycle, OEMs can reduce their development costs and achieve a lower total cost of ownership by leveraging pre-certified wireless connectivity, remote management, cloud integration, and complete Linux Yocto Project and Android software platform support.

BLOCK DIAGRAM

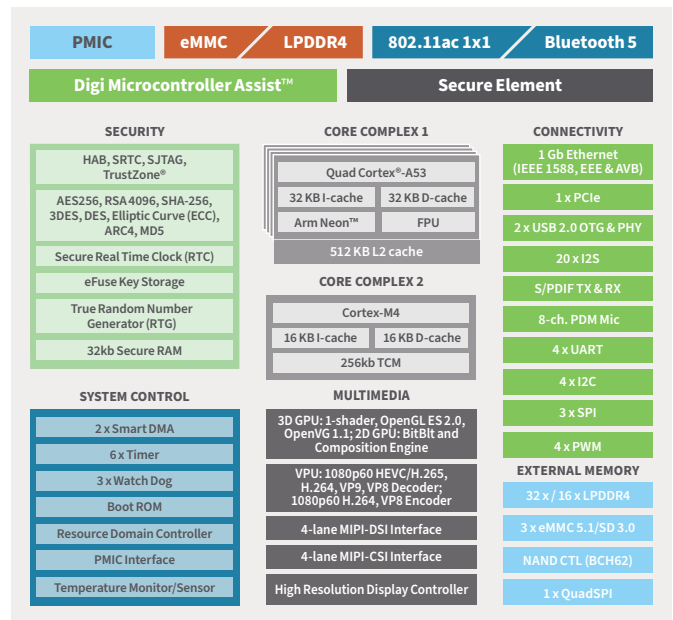


BENEFITS

- Industrial i.MX 8M Mini quad-core system-on-module
- Digi SMTplus® form factor (40 mm x 45 mm) for ultimate reliability and design freedom
- Power management with both hardware and software support for low-power designs
- Display and camera capabilities with graphics and video hardware acceleration
- Video capabilities with built-in VPU
- Pre-certified dual-band 802.11a/b/g/n/ac 1x1 and Bluetooth® 5 connectivity
- Seamless cellular modem and Digi XBee® wireless integration
- Cloud and edge-compute services integration
- Built-in device security, identity and privacy with Digi TrustFence® and a hardware Secure Element
- Remote monitoring and management with Digi Remote Manager®
- Yocto Project Linux and Android support



RELATED PRODUCTS

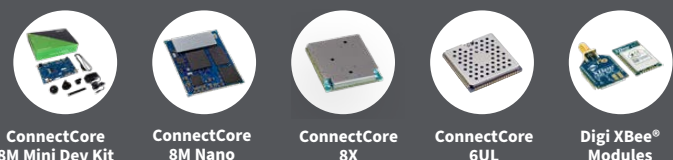

SPECIFICATIONS

Digi ConnectCore® 8M Mini

| | | |
|---|--|--|
| APPLICATION PROCESSOR | <p>NXP® i.MX8 Mini</p> <ul style="list-style-type: none"> • Four Cortex®-A53 cores @ 1.6 GHz • Cortex-M4 400 MHz core processor for low-power processing | |
| MEMORY | Up to 8 GB eMMC, up to 2 GB of LPDDR4 (32-bit) | |
| PMIC | NXP PCA9450 | |
| GRAPHICS / VIDEO | <p>Graphic Processing Unit:</p> <ul style="list-style-type: none"> • GCNanoUltra for 3D acceleration • GC320 for 2D acceleration • LCDIF display controller, supporting up to 1080 p 60 fps display through MIPI DSI • MIPI DSI (4-lane) with PHY (display interface) • MIPI CSI (4-lane) with PHY (camera interface) | <p>Video Processing Unit:</p> <ul style="list-style-type: none"> • 1080 p 60 HEVC H.265 (decode) • VP9, H.264, VP8 (encode/decode) |
| SECURITY | Digi TrustFence®, TRNG, TrustZone, Secure RTC, Secure JTAG, Secure Element | |
| PERIPHERALS / INTERFACES | <p>1x PCI Express 2.0 (PCIe) 2x USB 2.0 OTG controllers with integrated PHY interfaces 3x Ultra Secure Digital Host Controller (uSDHC) interfaces 5x Universal Asynchronous Receiver / Transmitter (UART) modules 4x I2C modules 3x SPI modules 1x Quad SPI 10x PWM channels 1x 16-bit ADC module with accurate internal voltage reference, up to 20 channels 5x Synchronous Audio Interface (SAI) modules supporting I2S, AC97, TDM, codec/DSP and DSD interfaces 1x S/PDIF input and output, including a raw capture input mode 8-channel Pulse Density Modulation (PDM) input Up to 112 GPIOs</p> | |
| ETHERNET | 10/100/1000M Ethernet + AVB | |
| WI-FI | 802.11a/b/g/n/ac dual-band wireless | |
| BLUETOOTH | Bluetooth® 5 | |
| ON-MODULE MICROCONTROLLER ASSIST | <p>Digi Microcontroller Assist™</p> <ul style="list-style-type: none"> • Independent Cortex-M0+ microcontroller subsystem • Supporting ultra-low power modes @ <3µA | |
| OPERATING TEMPERATURE | Industrial: -40° C to 85° C (-40° F to 185° F), depending on use case and enclosure/system design | |
| STORAGE TEMPERATURE | -50° C to 125° C (-58° F to 257° F) | |
| RELATIVE HUMIDITY | 5% to 90% (non-condensing) | |
| RADIO APPROVALS | US, Canada, EU, Japan, Australia/New Zealand | |
| EMISSIONS / IMMUNITY / SAFETY | <p>FCC Part 15 Class B, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, ICES- 003 Class B, VCCI Class II, AS 3548, FCC Part 15 Subpart C Section 15.247, IC (Industry Canada), RSS-210 Issue 5 Section 6.2.2(o), EN 300 328, EN 301 489-17, EN 55024, EN 301 489-3, Safety (IEC 62368-1)</p> | |
| DESIGN VERIFICATION | <p>Temperature: IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-78 Vibration/Shock: IEC 60068-2-6, IEC 60068-2-64, IEC 60068-2-27, HALT</p> | |
| MECHANICAL DIMENSIONS | 118 castellated vias, LGA-474, 1.27 mm pitch, 40 mm x 45 mm x 3.5 mm (1.6 in x 1.8 in x 0.1 in) | |
| PRODUCT WARRANTY | 3-year | |

| PART NUMBERS | DESCRIPTION |
|---|--|
| DIGI CONNECTCORE® 8M MINI DEVELOPMENT KITS | |
| CC-WMX8MM-KIT | Digi ConnectCore 8M Mini development kit with development board - quad core, 8 GB eMMC, 2 GB LPDDR4 wireless |
| DIGI CONNECTCORE 8M MINI SOMS | |
| CC-WMX-ET8D-NN | Digi ConnectCore 8M Mini - quad core, 8 GB eMMC, 2 GB LPDDR4 wireless |
| CC-WMX-ET7D-NN | Digi ConnectCore 8M Mini - quad core, 8 GB eMMC, 1 GB LPDDR4 wireless |
| CC-MX-ET8D-ZN | Digi ConnectCore 8M Mini - quad core, 8 GB eMMC, 2 GB LPDDR4 Ethernet |
| CC-MX-ET7D-ZN | Digi ConnectCore 8M Mini - quad core, 8 GB eMMC, 1 GB LPDDR4 Ethernet |

| ACCESSORIES | DESCRIPTION |
|----------------|---|
| CC-ACC-LCDH-10 | LCD application kit, including 10 in WXGA (high resolution) LCD panel |

FOR MORE INFORMATION
PLEASE VISIT DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2022 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91004458
A7/422

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

