


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/25/20	

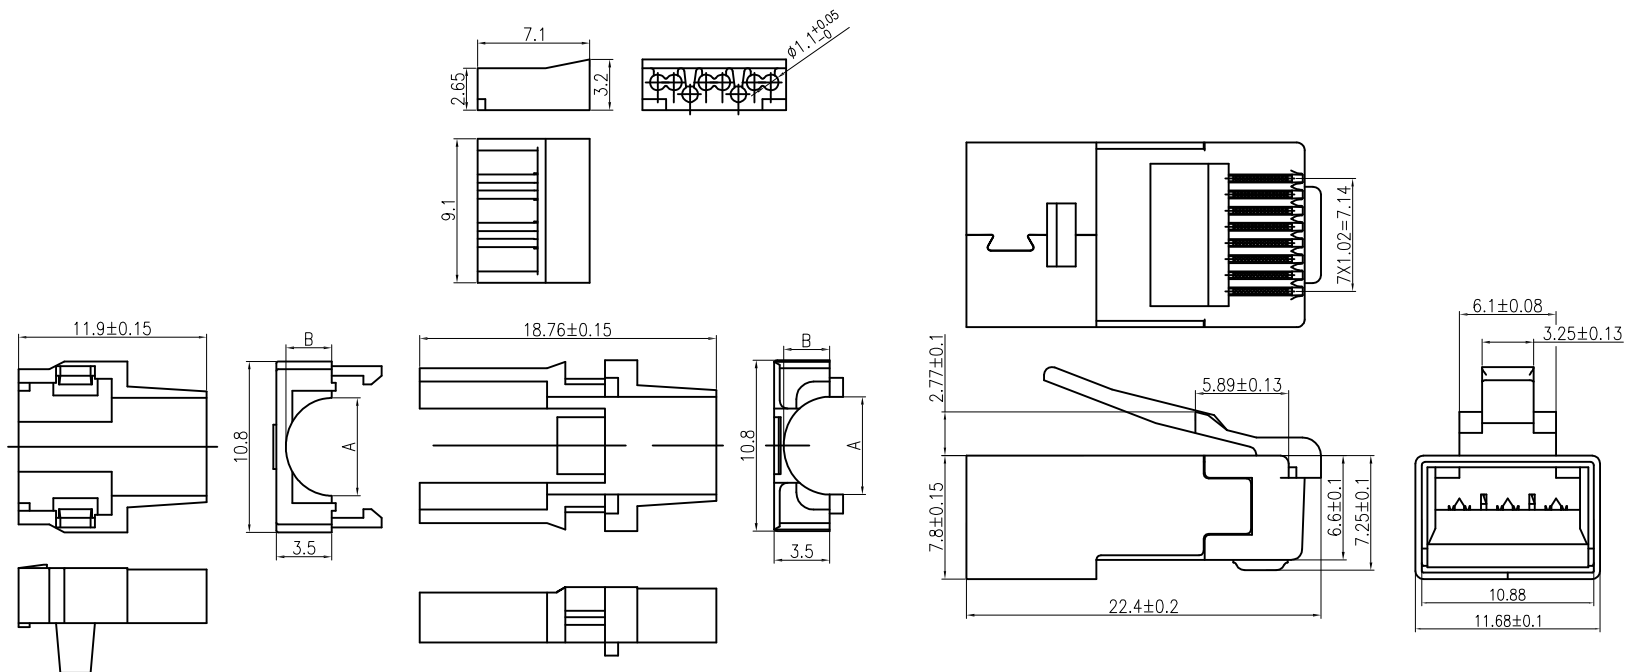

ADAM P/N	DIM A	DIM B
MTP-88-X-S-C6A1	6.18MM	2.90MM
MTP-88-X-S-C6A2	6.40MM	3.00MM

" X "	PLATING
X	Gold flash
U	15 µin Gold
W	30 µin Gold
G	50 µin Gold

**SPECIFICATIONS:**

Material:  
 Insulator: PC, Color: Clear  
 Contacts: Copper Alloy  
 Shield: H65Y  
 Plating:  
 Gold over Nickel underplate on contact area  
 Electrical:  
 Voltage rating: 150 VAC rms  
 Current rating: 1.5 Amp  
 Contact resistance: 20 mohms max  
 Insulation resistance: 1000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1,000 VAC rms For 1 Minute  
 Mechanical:  
 Wire range: 23~24AWG, Ø0.99mm~1.09mm  
 Temperature Rating:  
 Operating temperature: -25°C to +55°C  
 Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED ANGLE 0~15 ± 0.15 15~30 ± 0.20 30~ ± 0.25		<b>ADAM TECH</b> INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
		TITLE MODULAR TELEPHONE PLUG, 8P8C, SOLID WIRE CONTACTS, CAT 6A				
APPROVALS		DATE		SIZE	PART NO.	REV.
DRAWN	LH	9/25/20		X	MTP-88-X-S-C6AX	-
CHECKED	AY1	9/25/20		REF:	S00005C	SCALE: NTS
APPROVED				SHEET 1 OF 1		