
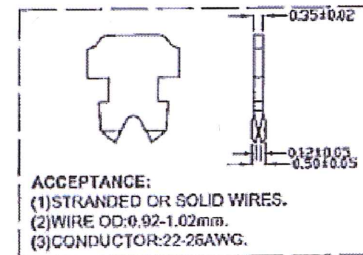

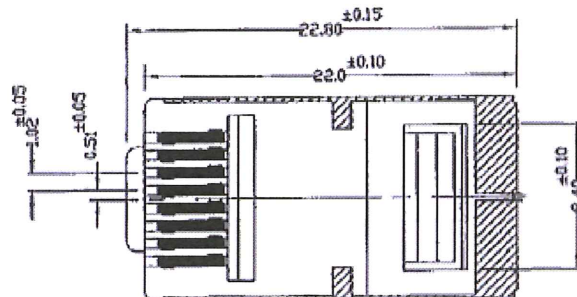
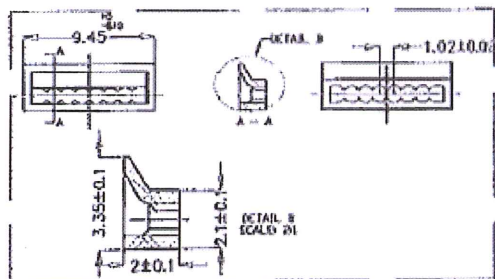
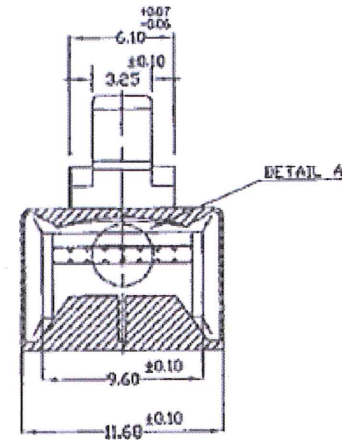
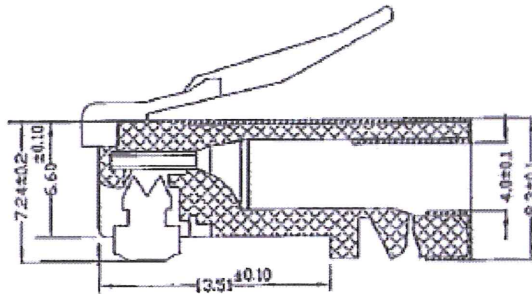


| REV | ECO NO.                       | DATE   | BY | APP'D |
|-----|-------------------------------|--------|----|-------|
| A   | REL TO PRODUCTION PER ECO 001 | 7/1/13 | KL |       |

RoHS COMPLIANT



UNIT: mm

1. TYPE OF MODULAR PLUG: 8P8C
2. ELECTRICAL:  
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC  
INSULATION RESISTANCE: 500 MEGOHMS MIN.  
CONTACT RESISTANCE: 30 MILLIOHMS MAX.  
RATED 250 VOLTS AC MAX. AT 1.5 AMPS.
3. MATERIAL & FINISH:  
PLASTIC HOUSING: POLYCARBONATE (PC), UL94-V0  
CONTACT BLADE:  
PHOSPHOROUS BRONZE, 50U" GOLD PLATED  
SHIELD: COPPER ALLOY, NICKEL PLATED
4. DURABILITY: 1,000 MATING CYCLES

CONFIDENTIAL

© Copyright 2013 Regal Electronics, Inc. This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.



|           |     |      |        |
|-----------|-----|------|--------|
| DRAWN:    | KIM | DATE | 7/1/13 |
| CHECKED:  |     | DATE |        |
| ENGINEER: |     | DATE |        |
| APPROVED: |     | DATE |        |
| APPROVED: |     | DATE |        |
| APPROVED: |     | DATE |        |

|  |                                |              |
|--|--------------------------------|--------------|
| TITLE:<br>STP CAT.6 8P8C SHIELDED PLUG |                                |              |
| SIZE<br>B                              | DRAWING NO.<br>R1003B-8P8CR-C6 | REV<br>A     |
| SCALE:<br>NONE                         |                                | SHEET 1 OF 1 |