




**67 MHz Crystal Filter**

**P/N: AM67CR285**

Center Frequency (Fo): 67 MHz  
Insertion Loss at Fo: <6 dB  
Bandwidth (BW): Fo +/- 105 KHz  
Return Loss at Fo: >12 dB  
Rejection Frequency on low side (Fs-): -3 MHz  
Rejection Frequency on high side (Fs+): +3 MHz  
Attenuation at Fs-: >35 dB  
Attenuation at Fs+: >35 dB  
Power handling: 10 dBm max input power  
Temperature Ambient: 0°C to +50°C  
Package: PCB Mount

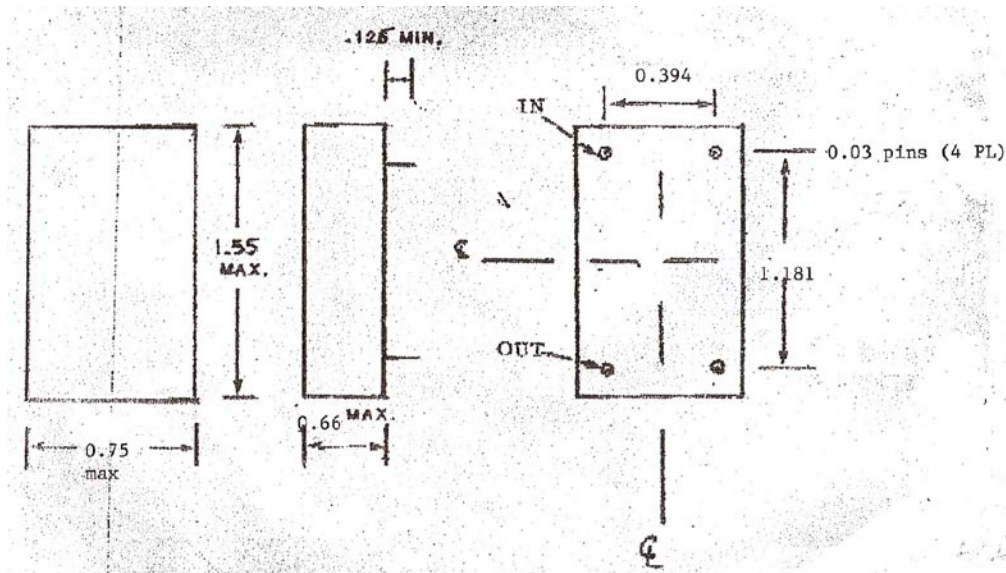



**67 MHz Crystal Filter**

**P/N: AM67CR285**

