




40 MHz Crystal Filter

P/N: AM40CR246

| | |
|----------------------------|----------------------|
| Center Frequency (Fo): | 40 MHz |
| Passband Bandwidth (1 dB): | +/- 8 KHz |
| Attenuation: | >40 dBc @ +/- 25 KHz |
| Insertion Loss: | <6 dB |
| Passband Ripple: | <1 dB |
| VSWR: | 2.25:1 |
| Input/output impedance: | 50 |
| Operating temperature: | -20 to +70°C |

Outline Drawing:

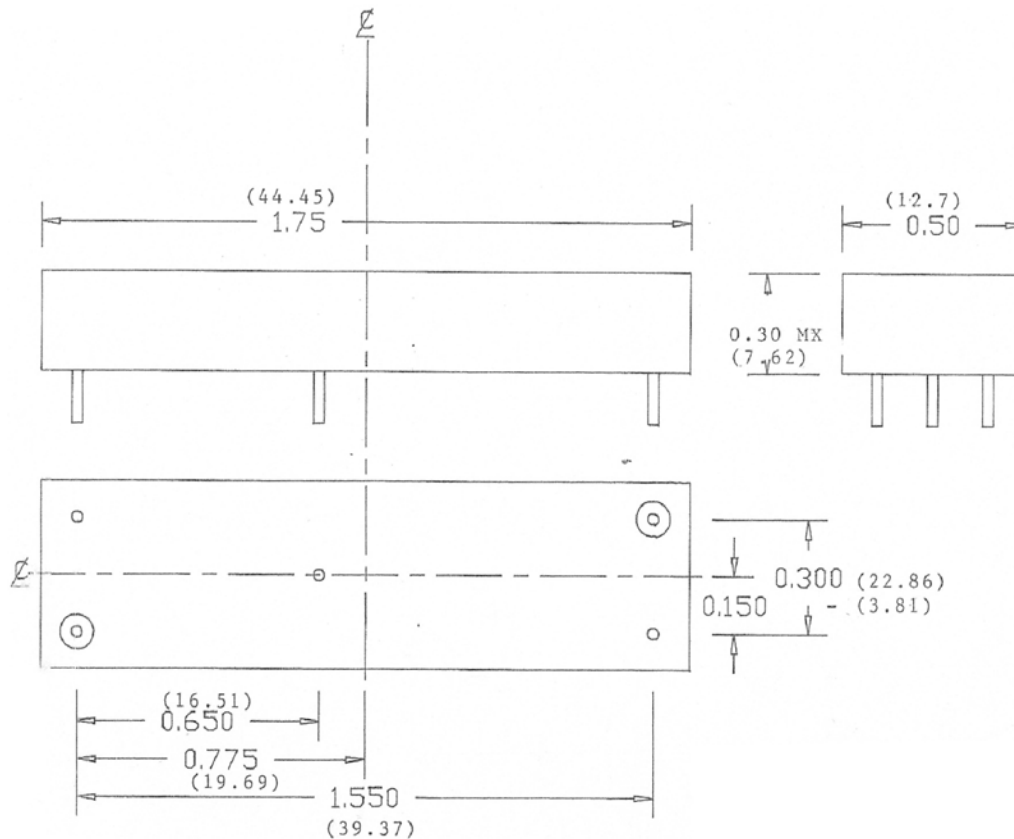

- NOTES:
 1. .030" TERMINAL (TYP-2PL)
 2. .030" GROUND PIN (TYP-3PL)
 (.76)