




**42 MHz Crystal Filter**

**P/N: AM42CR247**

Center Frequency (Fo):	42 MHz
Passband Bandwidth (1 dB):	+/- 8 KHz
Attenuation:	>40 dBc @ +/- 25 KHz
Insertion Loss:	<6 dB
Passband Ripple:	<1 dB
VSWR:	2.25:1
Input/output impedance:	50
Operating temperature:	-20 to +70°C

**Outline Drawing:**

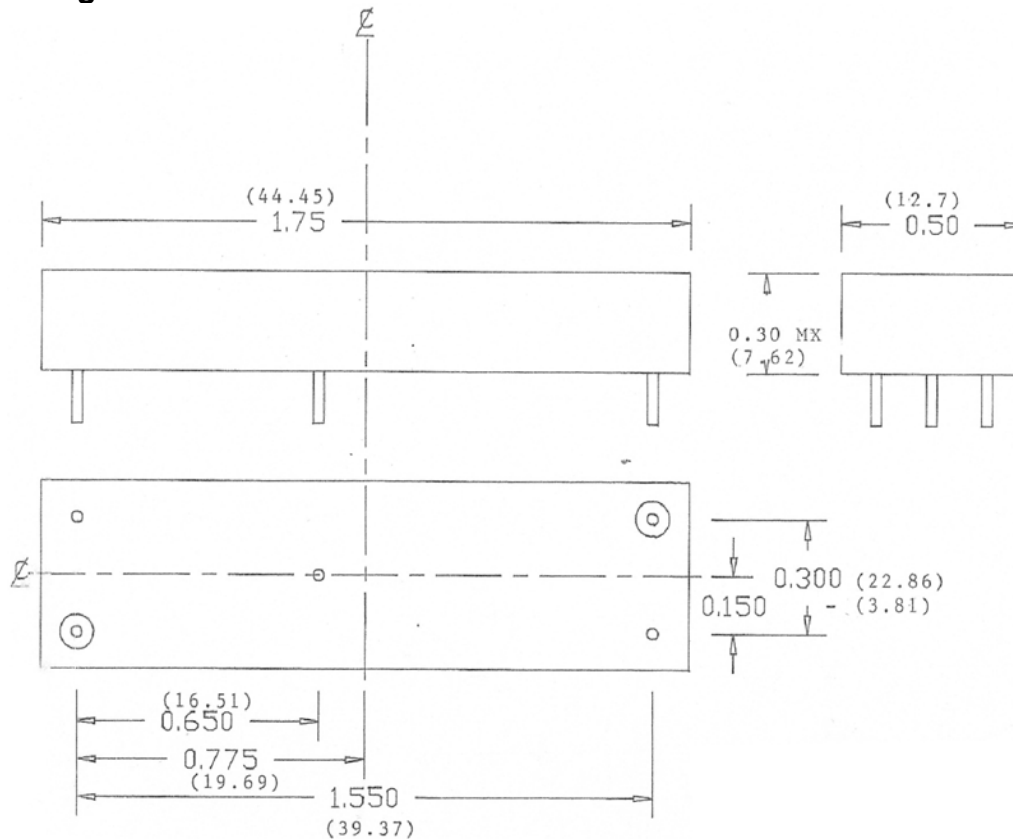

- NOTES:
1. .030" TERMINAL (TYP-2PL)
  2. .030" GROUND PIN (TYP-3PL)  
(.76)