



54122/DM74122

Retriggerable Resettable Multivibrator

General Description


The '122 features positive and negative DC level triggering inputs, complementary outputs, an optional 10 kΩ internal timing resistor and an overriding Direct Clear (\overline{C}_D) input. When the circuit is in the quasi-stable (delay) state, another trigger applied to the inputs (per Truth Table) will cause the delay period to start again, without disturbing the outputs. This process can be repeated indefinitely and thus the output pulse period (Q HIGH, \overline{Q} LOW) can be made as long as desired. Alternatively, a delay period can be terminated

by a LOW signal applied to \overline{C}_D , which also prevents triggering. An internal connection from \overline{C}_D to the input gate makes it possible to trigger the circuit by a positive-going signal on \overline{C}_D , as shown in the Truth Table. For timing capacitor values greater than 1000 pF, the output pulse width is defined as follows:

$$t_w = 0.32 R_X C_X (1.0 + 0.7/R_X)$$

Where t_w is in ns, R_X is in kΩ and C_X is in pF.


Connection Diagram



TL/F/10212-1

Order Number 54122DMQB, 54122FMQB or DM74122N
See NS Package Number J14A, N14A or W14B

Logic Symbol

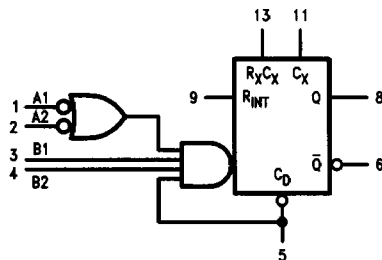

TL/F/10212-2

V_{CC} = Pin 14
GND = Pin 7
NC = Pins 10 and 12

Pin Names	Description
$\overline{A}_1, \overline{A}_2$	Trigger Inputs (Active Falling Edge)
B1, B2	Trigger Inputs (Active Rising Edge)
\overline{C}_D	Direct Clear Inputs (Active LOW)
Q, \overline{Q}	Outputs

Absolute Maximum Ratings (Note)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage	7V
Input Voltage	5.5V
Operating Free Air Temperature Range	
54	-55°C to +125°C
DM74	0°C to +70°C
Storage Temperature Range	-65°C to +150°C

Note: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Recommended Operating Conditions

Symbol	Parameter	54122			DM74122			Units
		Min	Nom	Max	Min	Nom	Max	
V _{CC}	Supply Voltage	4.5	5	5.5	4.75	5	5.5	V
V _{IH}	High Level Input Voltage	2			2			V
V _{IL}	Low Level Input Voltage			0.8			0.8	V
I _{OH}	High Level Output Current			-0.8			-0.8	mA
I _{OL}	Low Level Output Current			16			16	mA
T _A	Free Air Operating Temperature	-55		125	-55		70	°C

Recommended Operating Conditions V_{CC} = +5.0V, T_A = +25°C

Symbol	Parameter		Conditions	DM74		Units
				Min	Max	
t _w	Trigger Pulse Width		Over Operating V _{CC} and Temperature Range	40		ns
R _X	External Timing Resistor	XC		5.0	50	kΩ
		XM		5.0	25	
C _X	External Timing Capacitor			No Restrictions		pF

Electrical Characteristics over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ (Note 1)	Max	Units
V _I	Input Clamp Voltage	V _{CC} = Min, I _I = -12 mA			-1.5	V
V _{OH}	High Level Output Voltage	V _{CC} = Min, I _{OH} = Max, V _{IL} = Max	2.4			V
V _{OL}	Low Level Output Voltage	V _{CC} = Min, V _{IH} = Min			0.4	V
I _I	Input Current @ Max Input Voltage	V _{CC} = Max, V _I = 5.5V			1	mA
I _{IH}	High Level Input Current	V _{CC} = Max, V _I = 2.4V	Inputs		40	μA
			Clear		80	
I _{IL}	Low Level Input Current	V _{CC} = Max, V _I = 0.4V	Inputs		-1.6	mA
			Clear		-3.2	
I _{OS}	Short Circuit Output Current	V _{CC} = Max (Note 2)	-10		-40	mA
I _{CC}	Supply Current	V _{CC} = Max			28	mA

Note 1: All typicals are at V_{CC} = 5V, T_A = 25°C.

Note 2: Not more than one output should be shorted at a time, and the duration should not exceed one second.

Switching Characteristics

$V_{CC} = +5.0V$, $T_A = +25^\circ C$ (See Section 3 for waveforms and load configurations)

Symbol	Parameter	Conditions	54/74		Units
			$C_L = 15 \text{ pF}$ $R_L = 400\Omega$		
			Min	Max	
t_{PLH}	Propagation Delay B to Q	$C_X = 0 \text{ pF}$, $R_X = 5 \text{ k}\Omega$ <i>Figure 3-1, Figure a</i>		28	ns
t_{PLH}	Propagation Delay \bar{A} to Q			33	ns
t_{PLH}	Propagation Delay B to \bar{Q}			36	ns
t_{PHL}	Propagation Delay \bar{A} to \bar{Q}			40	ns
t_{PLH}	Propagation Delay \bar{C}_D to \bar{Q}	$C_X = 0 \text{ pF}$, $R_X = 5 \text{ k}\Omega$ <i>Figure 3-1, Figure 3-10</i>		40	ns
t_{PHL}	Propagation Delay \bar{C}_D to Q			27	ns
$t_{w(out)}$	Pulse Width at Q with Zero Timing Capacitor	$C_X = 0 \text{ pF}$, $R_X = 5 \text{ k}\Omega$ <i>Figure 3-1, Figure a</i>		65	ns
$t_{w(out)}$	Pulse Width with External Timing Components	$C_X = 1000 \text{ pF}$, $R_X = 10 \text{ k}\Omega$ <i>Figure 3-1, Figure a</i>	3.08	3.76	μs

Triggering Truth Table


\bar{C}_D	Inputs*				Response
	\bar{A}_1	\bar{A}_2	B_1	B_2	
L	X	X	X	X	No Trigger
X		L	X	X	No Trigger
X		X	L	X	No Trigger
H		H	H	H	Trigger
X	X	X		L	No Trigger
X	H	H		X	No Trigger
H	L	X		H	Trigger
	L	X	H	H	Trigger

H = HIGH Voltage Level

L = LOW Voltage Level

X = Immaterial

*Input pins 1 and 2 are logically interchangeable, as are input pins 3 and 4.

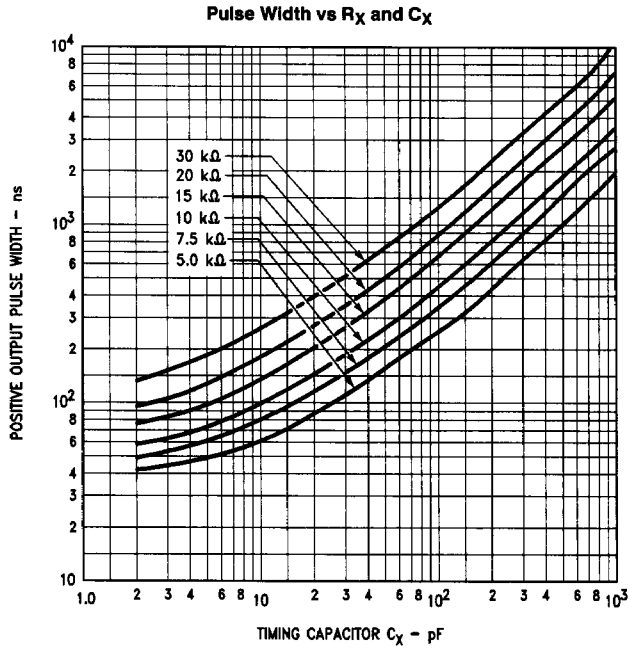

TL/F/10212-3

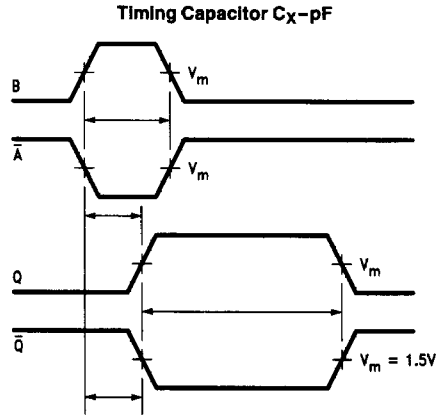


FIGURE A

TL/F/10212-4