REVISIONS

REV	DESCRIPTION	DATE	ISSUED BY
–	ISSUED DRAWING	05/10/06	Y. SEKIGUCHI

FILE NAME: ACAD\MXFMR\A313620C.DWG	SCALE: NONE	REV: –	COVER SHEET
TITLE: HBL–0334 PIEZOELECTRIC INVERTER	DOCUMENT NUMBER: P–A3–13620		
TAMURA CORPORATION OF AMERICA 43352 BUSINESS PARK DRIVE • TEMECULA • CA • 92590 TEL: (951)699–1270 • FAX: 9516769482	PREPARED BY:	K. BRENNAN	05/09/06
	ENGINEERING:	M. PITCHAI	05/10/06
	APPROVED:	Y. SEKIGUCHI	05/10/06

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

PROPRIETY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.

PIEZOELECTRIC INVERTER

1. Scope

This applies to the CCFT Inverter (Cold-Cathode Flourescent Tube Inverter) HBL-0334 (RoHS Compliant)

2. Electrical Characteristics

a. Absolute Maximum Rating

Input voltage	6.0V MAX.
Max. output power	0.8W MAX.


b. Input/Output Characteristics

The measuring circuit and measuring method shall be as set forth in Section 4. (Unless otherwise specified, Ta = 25°C)
Values are those obtained 3 minutes after the power is turned on.

Item	Specification
Input Voltage	3.0V ~ 5.5V
Input current	280mA MAX (Vin = 3.0V)
Output open voltage	1100Vrms MIN (at ambient temperature 0°C)
Output current	1.4mArms ±10%
Frequency	100KHz ±10%
ON/OFF function	ON: ON/OFF terminal signal HIGH (2.5V ~ Vin) OFF: ON/OFF terminal signal LOW (0V ~ 0.5V)

c. Duty Dimming


The duty dimming must be possible by applying the following signal to the ON/OFF terminal,

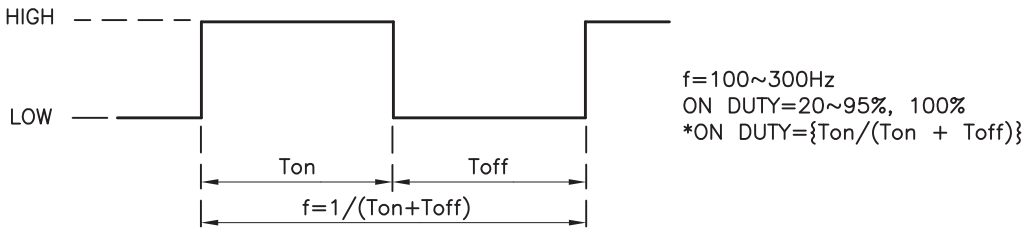


FILE NAME: ACAD\MXFMR\A3136201.DWG	SCALE: NONE	REV: -	DATE: 05/09/06	SHEET 1 OF 4
TAMURA CORPORATION OF AMERICA 43352 BUSINESS PARK DRIVE • TEMECULA • CA • 92590 TEL: (951)699-1270 • FAX: 9516769482	TITLE: HBL-0334 PIEZOELECTRIC INVERTER			
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANCE WITHOUT PRIOR NOTICE	DOCUMENT NUMBER: P-A3-13620			

PROPRIETY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.

d. Input Sequence and the rise rate of voltage (ON/OFF)

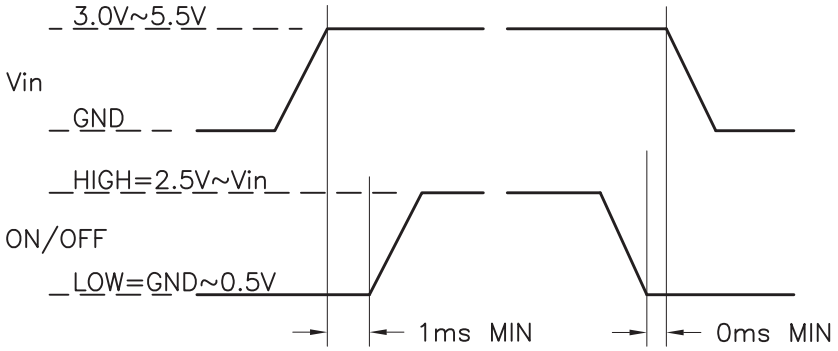

Until Vin voltage reaches the spec voltage, it does not change ON/OFF function from LOW to HIGH.
When the terminal Vin is turned off, it is necessary to ON/OFF=LOW.

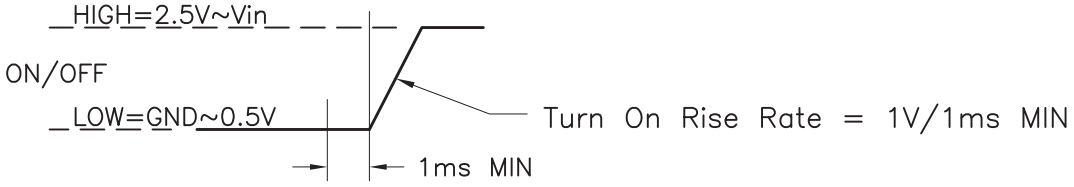

The start up rise rate must be 1V/1ms or faster. If the minimum slow rate requirement is not met then the inverter output may not start.

3. Input/Output Interface Connection

Input CN2: SM03B-SRSS-TB (LF) (JST) or SM03B-SRSS-TB (LF) (SN) (JST)


Pin No.	Function
1	Vin
2	ON/OFF
3	GND

Output CN1: SM02B-BHSS-1-TB (LF) (JST) or SM02B-BHSS-1-TB (LF) (SN) (JST)

Pin No.	Function
1	HOT
2	COLD

PROPRIETY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.

4. Measuring Circuit and Method for Electrical Characteristic

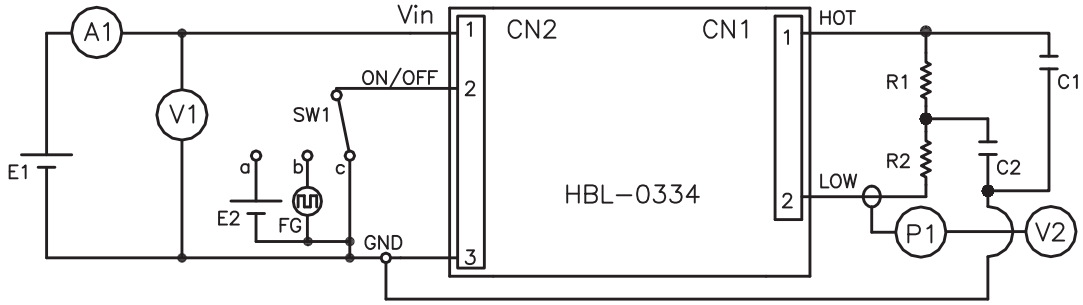

E1: DC regulated power supply	3.0V ~ 5.5V
E2: DC regulated power supply	2.5V
V1: DC voltmeter	TR6851 (ADVANTEST) or equivalent
V2: Effective value voltmeter	3400B (YHP) or equivalent
A1: DC ammeter	Type 2011 Class 0.5 (YEW) or equivalent
P1: Probe	P6021 (Tektronix) or equivalent
FG: Function generator	3314A (HP) or equivalent

<Equivalent load for inspection>
R1: 133kΩ, 1W
R2: 133kΩ, 1W
C1: 2pF, 3kV
C2: 3pF, 3kV

5. Ambient Conditions

a. Temperature
Operating temperature: 0°C ~ 50°C
Storage temperature: −20°C ~ 70°C

b. Humidity
Operating humidity: 20% ~ 80% (No condensation)
Storage humidity: 5% ~ 90% (No condensation)

6. Reliability
The reliability is verified on the following items

Item	Specification	Sample Qty
Left at high temp.	Ambient temperature 70°C, 240H	4
Left at low temp.	Ambient temperature −20°C, 240H	4
Left at High temp. and high humidity	Ambient temperature 40°C, Humidity 90%, 240H	4
Temperature Cycle	−20°C ~ 70°C, 5 cycles	4
High temperature power on	Ambient temperature 50°C, input voltage 5.5V, output current 1.4mArms, 500H (Equivalent load resistance)	11
ON/OFF test	5 sec:ON, 5 sec:OFF, 50000 times (Input voltage 5.5V, output current 1.4mArms, Equivalent load resistance)	5
Vibration	Acceleration 3G, frequency sweep 10~55Hz for 45 min. Once in each of X, Y, and Z directions.	3
Shock	Acceleration 80G, acting time 11ms, 3 times in each of X, Y, and Z directions.	3

After the end of each test. leave the product at room temperature and humidity for 24 hours. The Electrical and Mechanical characteristics shall remain within spec.

PROPRIETY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.

7. Precautions for static electricity


When transporting this product, use materials that will not develop an electrical charge. When handling this product, be sure to wear antistatic wrist bands or other protective equipment to prevent the product from being damaged by any electric charge.

Please make sure neither excessive impact nor bending occurs to the part during handling and transportation. This could cause the part to malfunction.

8. An input fuse is built into this inverter.

9. Dimensions and Connectors:

Dimensions are in mm[Inches]

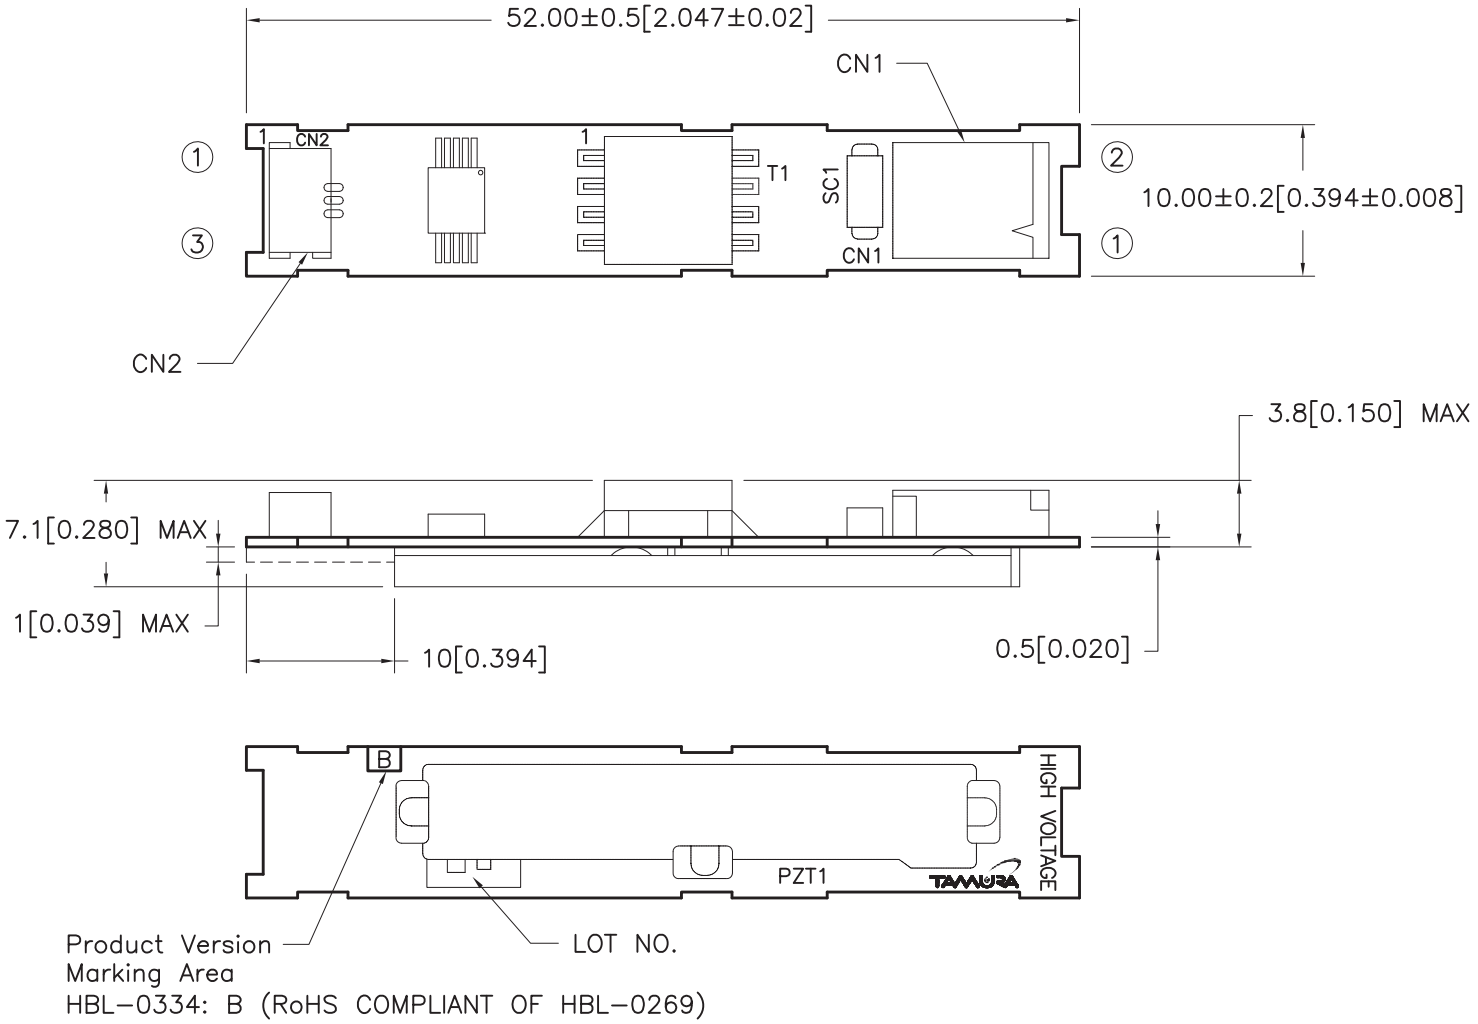

HBL−0334: B (RoHS COMPLIANT OF HBL−0269)

CN1: SM02B−BHSS−1−TB (LF) (JST)

① HOT
② COLD

CN2: SM03B−SRSS−TB (LF) (JST)

① VIN
② ON/OFF
③ GND

FILE NAME: ACAD\MXFMR\A3136204.DWG	SCALE: NONE	REV: −	DATE: 05/09/06	SHEET 4 OF 4

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE • TEMECULA • CA • 92590
TEL: (951)699−1270 • FAX: 9516769482

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANCE WITHOUT PRIOR NOTICE

TITLE: HBL−0334 PIEZOELECTRIC INVERTER

DOCUMENT NUMBER: P−A3−13620

PROPRIETY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.