
REV.	DESCRIPTION/ECO NO.	DATE
	RELEASE IN CAD	2/7/03

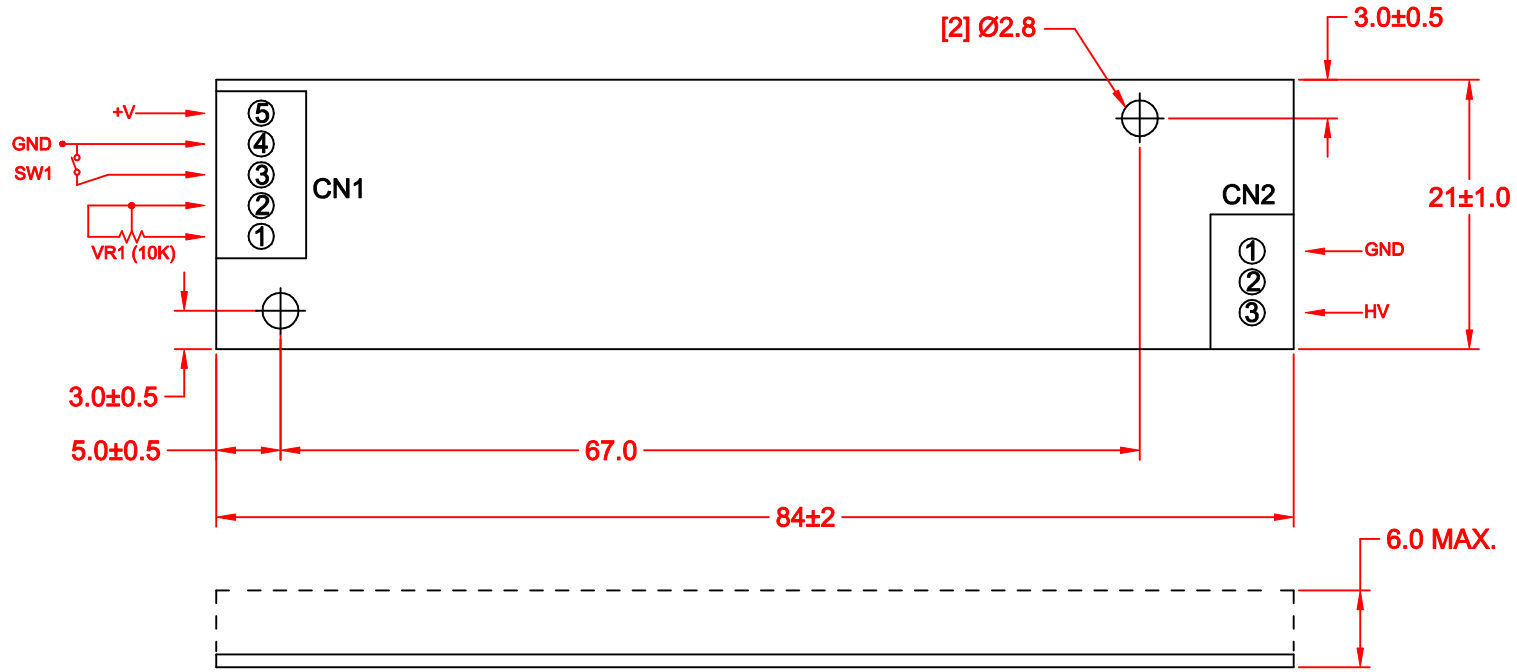

NO.	PIN NUMBER		JKL MATING WIRE HARNESS
CN1	1	VR1 POTENTIOMETER (10K)	BXC-10546
	2	VR1	
	3	SW1 INHIBIT (+V OR OPEN = OFF/GND = ON)	
	4	INPUT (GND)	
	5	INPUT (+12V)	
CN2	1	OUTPUT (HV)	BXC-10643
	2	---	
	3	---	
	4	---	
	5	OUTPUT (GND)	

NOTE:
MATING CONNECTORS ARE NOT INCLUDED WITH INVERTER. JKL WIRE HARNESS BXC-10546 AND BXC-10643 CAN BE ORDERED SEPARATELY.

OPERATING SPECIFICATIONS

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	8.0	12.0	16.0
INPUT CURRENT: (mA)	200	230	260
OUTPUT VOLTAGE: (Vrms)	900	1000	----
OUTPUT CURRENT 2 X (mA)	5.5	6.0	7.0
OUTPUT FREQUENCY: (kHz)	27	37	47
DIMMING RANGE (%)	40	----	100
OPERATING TEMP: (CELSIUS)	0	25	60

METRIC
THIRD ANGLE PROJECTION

DIMENSIONS ARE IN MILLIMETERS
TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/- 0.3
2 PL +/-
ANGLE +/- 0

JKL COMPONENTS CORPORATION

TITLE: DIMMING CCFL NVERTER

DRAWN BY	APP'D BY	DATE	SIZE	FSCM NO.	DRAWING NO.
L. WENGSTROM	F.D.	2/7/03	A	55335	BXA-12564-6M

- CAD DRAWING -
MANUAL REVISIONS NOT PERMITTED

SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET
NONE	2/7/03			OF