

## Panel feed-through terminal block - HDFK 95/Z - 0717364

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Panel feed-through terminal block, Connection method: Screw connection, Load current : 232 A, Cross section: 35 mm<sup>2</sup> - 95 mm<sup>2</sup>, Connection direction of the conductor to plug-in direction: 0 °, Width: 25 mm, Color: gray

### Product Features

- Easy grouping with engagement pin versions
- Both terminal halves can be easily assembled by simply snapping them together
- Universal screw connection with screw locking
- Automatic compensation of the panel thickness via the snap principle integrated in the insulation housing
- Spacer plates increase air and creepage distances



### Key commercial data

|                                      |           |
|--------------------------------------|-----------|
| Packing unit                         | 1 1       |
| Minimum order quantity               | 10 1      |
| Weight per Piece (excluding packing) | 244.0 GRM |
| Custom tariff number                 | 85369010  |
| Country of origin                    | Greece    |

### Technical data

#### General

|   |       |
|---|-------|
| Number of levels                        | 1     |
| Number of connections                   | 2     |
| Color                                   | gray  |
| Insulating material                     | PA    |
| Inflammability class according to UL 94 | V0    |
| Maximum load current                    | 232 A |
| Rated surge voltage                     | 8 kV  |
| Pollution degree                        | 3     |
| Surge voltage category                  | III   |

# Panel feed-through terminal block - HDFK 95/Z - 0717364

## Technical data

### General

|                                  |  |
|----------------------------------|--|
| Insulating material group        | I  |
| Connection in acc. with standard | IEC 60947-7-1                                  |
| Nominal current $I_N$            | 232 A  |
| Nominal voltage $U_N$            | 1000 V (With metal panels of 1 mm ... 2.5 mm)  |
|                                  | 800 V (With metal panels over 2.5 mm ... 5 mm) |
|                                  | 690 V (With metal panels over 5 mm ... 6 mm)   |
| Open side panel                  | nein   |
| Number of positions              | 1  |

### Dimensions

|        |         |
|--------|---------|
| Width  | 25 mm   |
| Length | 94.5 mm |

### Connection data

|   |                    |
|---|--------------------|
| Note  | Terminal sleeve    |
| Connection side   | Level 1 ext. 1     |
| Connection method   | Screw connection   |
| Conductor cross section solid min.  | 35 mm <sup>2</sup> |
| Conductor cross section solid max.  | 95 mm <sup>2</sup> |
| Conductor cross section stranded min.   | 35 mm <sup>2</sup> |
| Conductor cross section stranded max.   | 95 mm <sup>2</sup> |
| Conductor cross section AWG/kcmil min.  | 4                  |
| Conductor cross section AWG/kcmil max   | 2/0                |
| Conductor cross section stranded, with ferrule without plastic sleeve min.            | 25 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule without plastic sleeve max.            | 95 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule with plastic sleeve min.               | 25 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule with plastic sleeve max.               | 95 mm <sup>2</sup> |
| 2 conductors with same cross section, solid min.                                      | 25 mm <sup>2</sup> |
| 2 conductors with same cross section, solid max.                                      | 35 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded min.                                   | 25 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded max.                                   | 35 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min. | 16 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max. | 35 mm <sup>2</sup> |
| Stripping length  | 27 mm              |
| Internal cylindrical gage   | B12                |
| Screw thread  | M8                 |
| Tightening torque, min  | 15 Nm              |

# Panel feed-through terminal block - HDFK 95/Z - 0717364

## Technical data

### Connection data

|                       |       |
|-----------------------|-------|
| Tightening torque max | 20 Nm |
|-----------------------|-------|

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27141131 |
| eCl@ss 4.1 | 27141131 |
| eCl@ss 5.0 | 27141134 |
| eCl@ss 5.1 | 27141134 |
| eCl@ss 6.0 | 27141134 |
| eCl@ss 7.0 | 27141134 |
| eCl@ss 8.0 | 27141134 |

### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC001283 |
| ETIM 3.0 | EC001283 |
| ETIM 4.0 | EC001283 |
| ETIM 5.0 | EC001283 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11     | 39121410 |
| UNSPSC 12.01  | 39121410 |
| UNSPSC 13.2   | 39121410 |

## Approvals

### Approvals

---

#### Approvals

CSA / UL Recognized / PRS / GOST / GOST

---

#### Ex Approvals

---

#### Approvals submitted

# Panel feed-through terminal block - HDFK 95/Z - 0717364

## Approvals

### Approval details

|                                |       |       |       |
|--------------------------------|-------|-------|-------|
| CSA                            |       |       |       |
|                                |       | B     | C     |
| mm <sup>2</sup> /AWG/kcmil     | 2     | 2     | 2     |
| Nominal current I <sub>N</sub> | 200 A | 200 A | 200 A |
| Nominal voltage U <sub>N</sub> | 600 V | 600 V | 600 V |

|                                |       |       |
|--------------------------------|-------|-------|
| UL Recognized                  |       |       |
|                                | B     | C     |
| mm <sup>2</sup> /AWG/kcmil     | 4     | 4     |
| Nominal current I <sub>N</sub> | 230 A | 230 A |
| Nominal voltage U <sub>N</sub> | 600 V | 600 V |

|     |
|-----|
| PRS |
|-----|

|      |
|------|
| GOST |
|------|

|      |
|------|
| GOST |
|------|

## Accessories

Accessories

Mounting material

Insertion profile - UKH 95 EP - 3009231



Insertion profile, Color: silver

## Panel feed-through terminal block - HDFK 95/Z - 0717364

### Accessories

---

#### Socket spanner

Tool - VDE-ISS 6 - 1201934




Allen wrench, fully insulated, safety tool in accordance with EN 60900, length: 150 mm, handle width: 110 mm, for all terminal blocks with 8 mm Allen screw

---

### Drawings

Dimensioned drawing

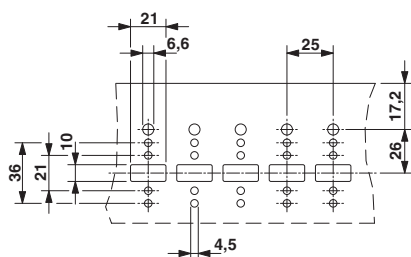

Dimensioned drawing

