



Electrical specifications

Center Frequency: 380 MHz
1dB Bandwidth: 10 MHz
Passband: 375-385 MHz
Insertion Loss: 3 dB Max
Return Loss: 14 dB Min
Ripple: 0.1 dB
Rejection: >60 dB @ 0-295 MHz
 >60 dB @ 456-1000 MHz
Power Handling: 10 W


Mechanical

Dimensions: 1.5 x 0.75 x 0.50 inches



Environmental

Operating Temperature: -55 to +85° C
Shock: 30 G. 11ms
Vibration: 10 G. 5 to 1000 Hz

Outline Drawing:

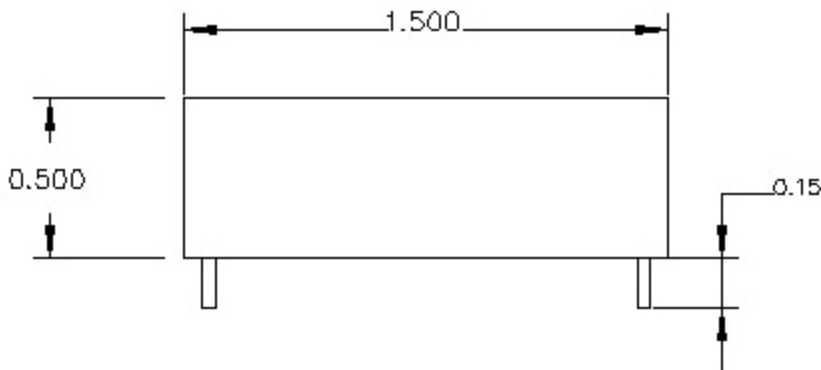

IN/OUT pin 0.02" dia, GND pin 0.04" dia

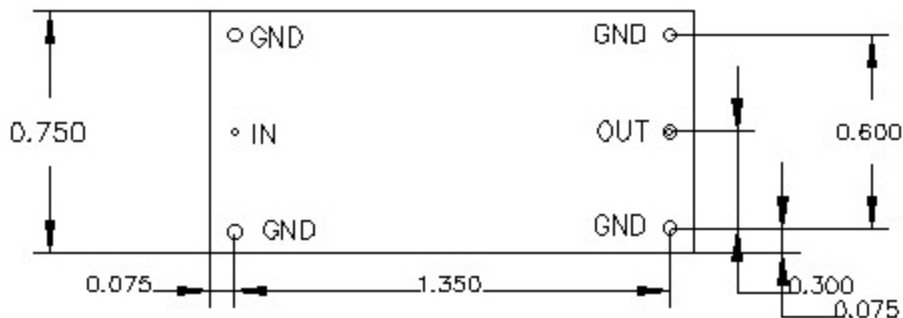

DWG 986887