



### Electrical Specifications

**Center Frequency:** 80 MHz  
**Insertion Loss:** 3.0 dB Max  
**Return Loss:** 15 dB Min  
**Rejection:** >30 dB @ 0-70 MHz  
>30 dB @ 90-1000 MHz


### Mechanical

**Connector Type:** SMA (F)  
**Dimensions:** 2.50 x 1.125 x 0.75 Inches

### Environmental

**Operating Temperature:** -40 to +85° C  
**Storage Temperature:** -50 to +95° C

### Outline Drawing:

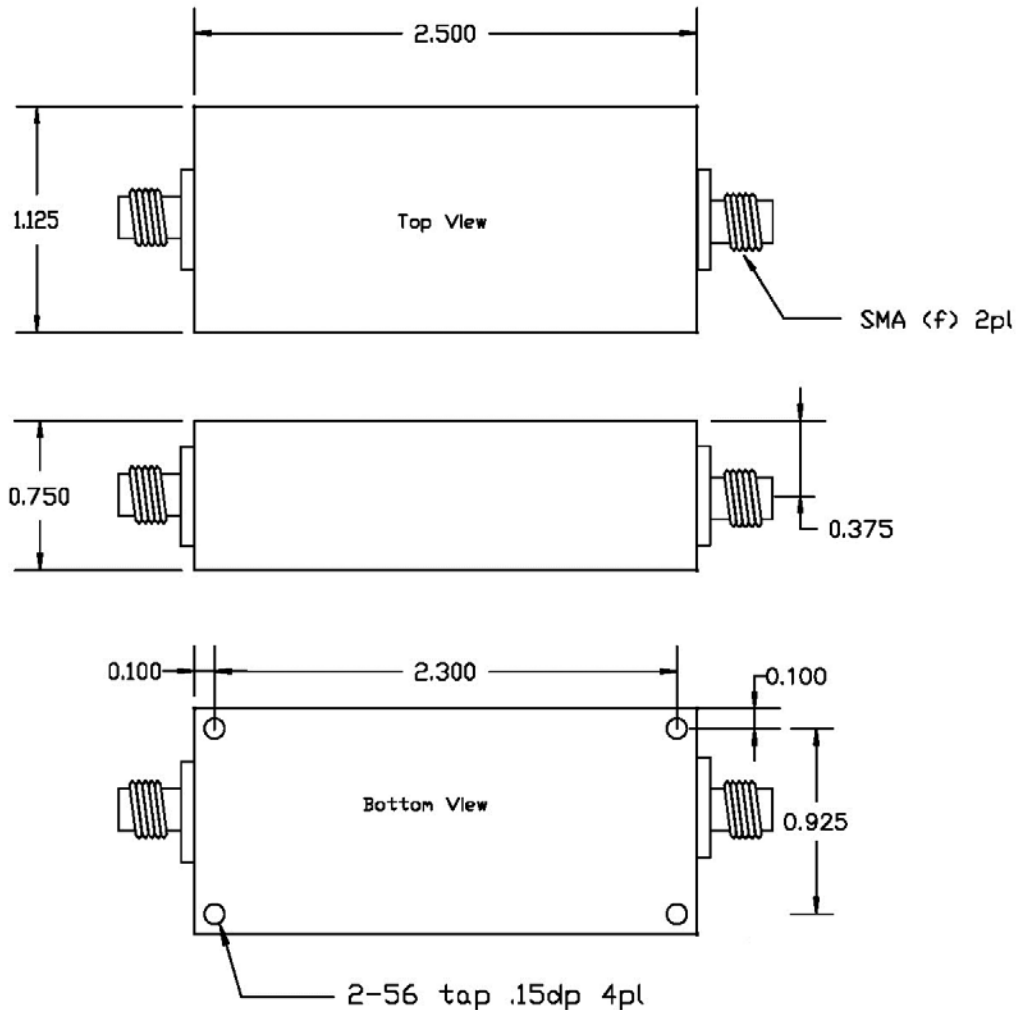



**Response Plot:**

