



Electrical specifications

Center Frequency: 400MHz
Passband: 392-408MHz **Passband**
Variation: <=2.0dB
Return loss @ 400 MHz: 15 dB min.
Rejection: >/=60dB@300MHz
Rejection 2: >/=60dB@500-800MHz
Rejection 3: >/=50dB up to 3000MHz
Impedance: 50Ω


Mechanical

Mounting Method: Drop-in
Dimensions: 2.00" x 0.70" x 0.70"

Environmental

Operating Temperature: -45°C to +85°C
Storage Temperature: -55°C to +100°C

Outline Drawing:

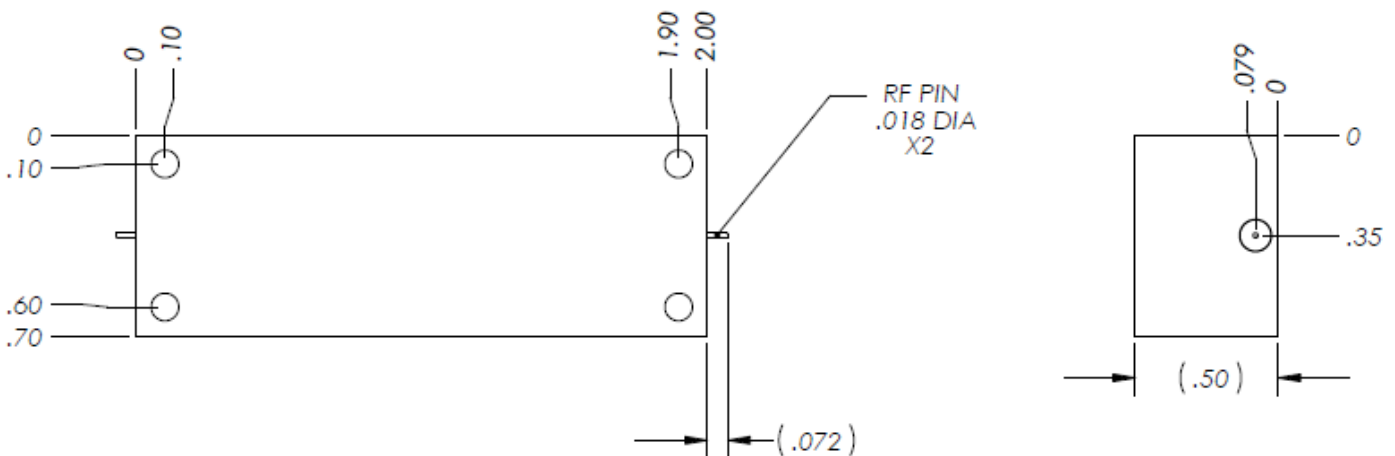



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

400MHz Bandpass Filter

Part Number: AE400B11073



Plot:

